



Heating and Air Conditioning

TECHNICAL GUIDE

PREDATOR[®]

R-410A XP SERIES 6-1/2 THRU 12-1/2 TON 60 Hertz



6-1/2 THROUGH 10 TON



12-1/2 TON

Description

ASHRAE 90.1 COMPLIANT

YORK[®] Predator[®] units are convertible single packages with a common footprint cabinet and common roof curb for all 6-1/2 through 12-1/2 ton models. All units have two compressors with independent refrigeration circuits to provide 2 stages of cooling. The units were designed for light commercial applications and can be easily installed on a roof curb, slab, or frame.

All Predator[®] units are self-contained and assembled on rigid full perimeter base rails allowing for 3-way forklift access and overhead rigging. Every unit is completely charged, wired, piped, and tested at the factory to provide a quick and easy field installation.

All units are convertible between side and down airflow. Independent economizer designs are used on side and down discharge applications, as well as all tonnage sizes.

Predator[®] XP units are available in the following configurations: heat pump and heat pump with electric heat. Electric heaters are available as factory-installed options or field-installed accessories.

Tested in accordance with:



Table of Contents

Description 1

Table of Contents 2

Component Location 2

Nomenclature 3

Features and Benefits 4

Guide Specifications 9

Physical Data 12

Capacity Performance 14

Airflow Performance 26

Sound Performance 33

Electrical Data 35


Typical Wiring Diagrams 43

Weights and Dimensions 45

Economizer Options 52


Component Location

Heat Pump

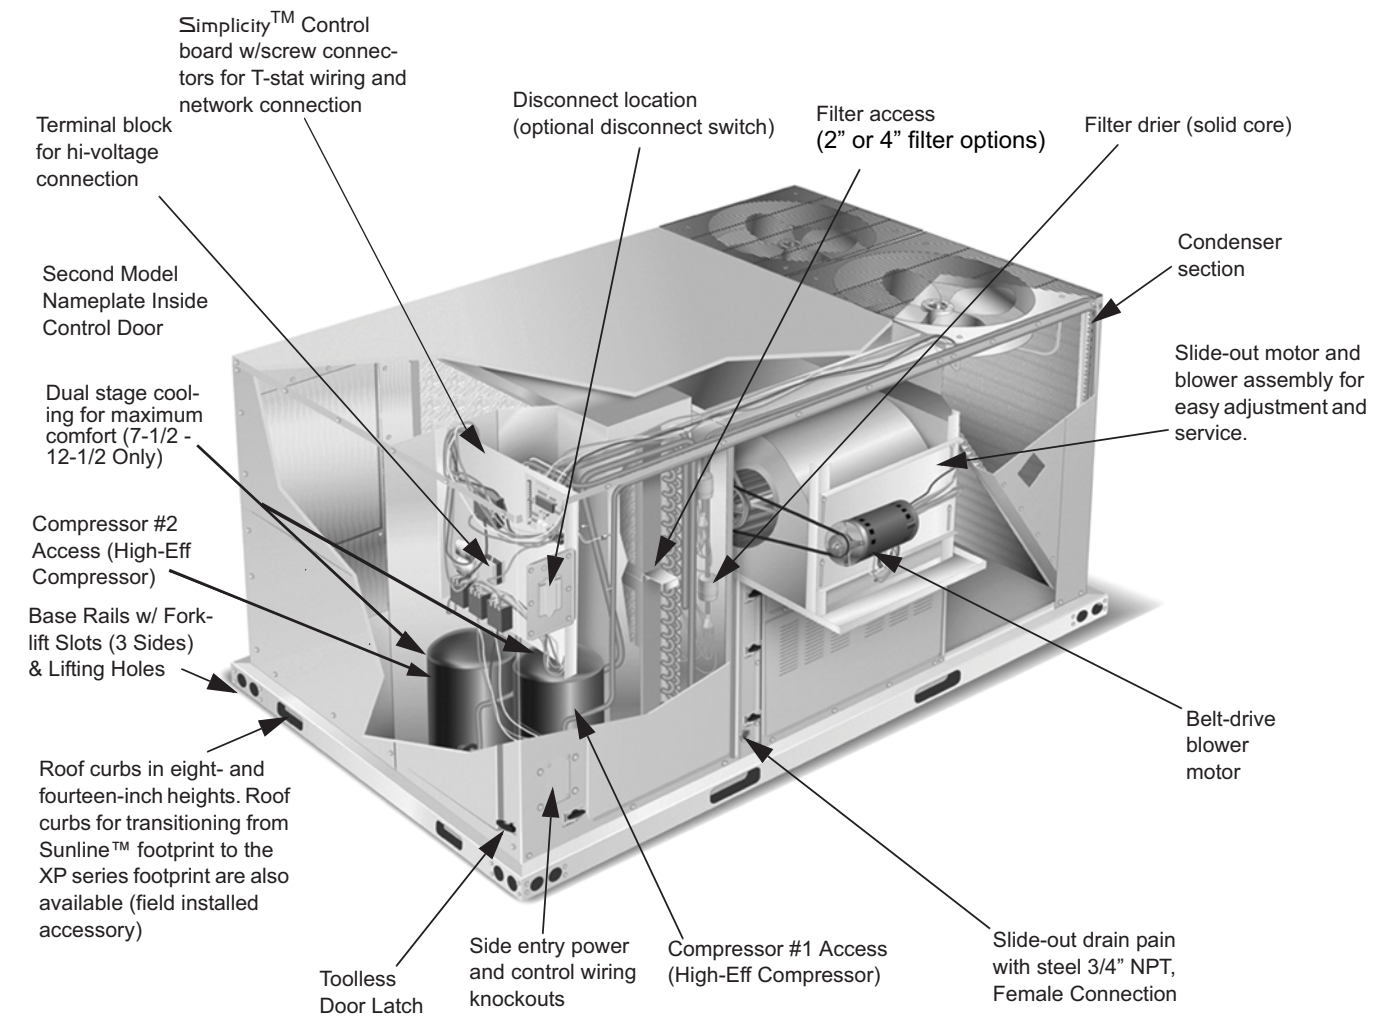

Nomenclature

6.5-12.5 Ton York® Model Number Nomenclature

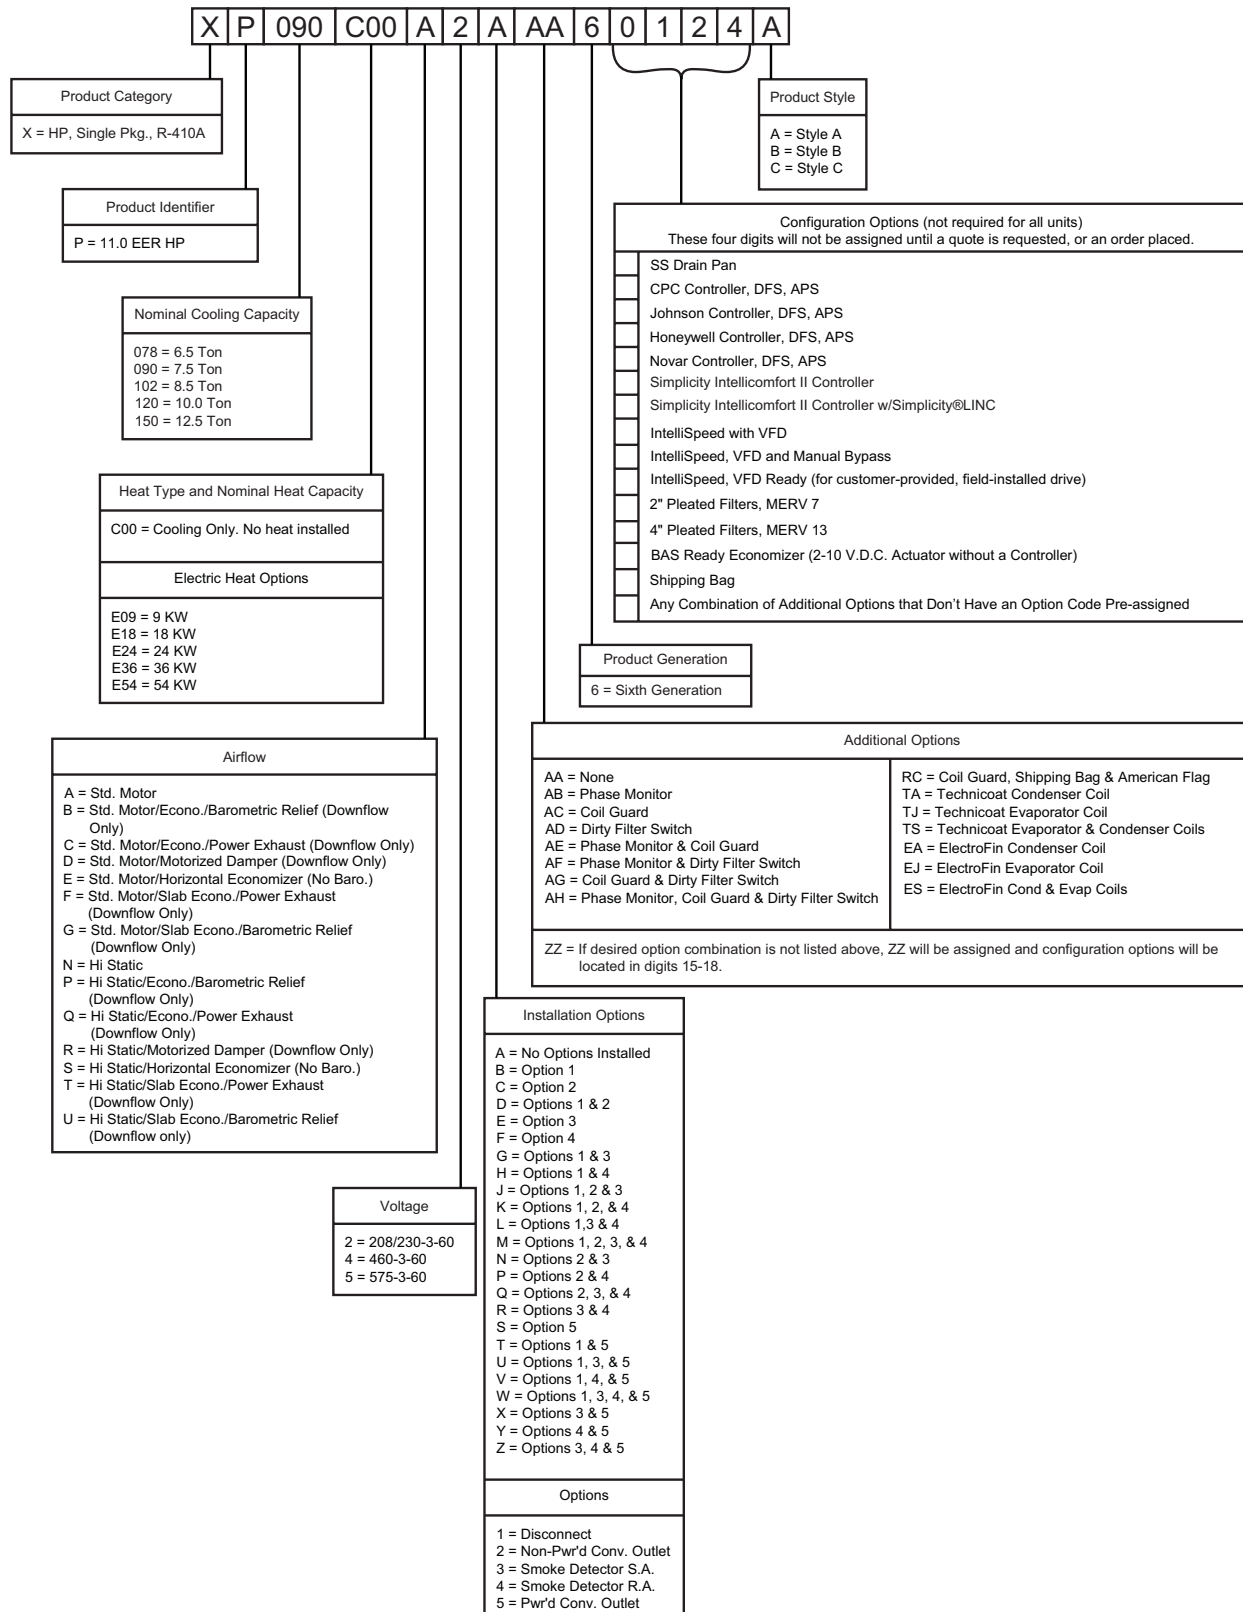

Features and Benefits

Standard Features

- **High Efficiency** – High efficiency units reach as high as 11.5 EER. These efficiencies exceed all legislated minimum levels and provide low operating costs.
- **Service Friendly** – The Predator® incorporates a number of enhancements which improve serviceability.
The motor and blower slide out of the unit as a common assembly. This facilitates greater access to all the indoor airflow components, thus simplifying maintenance and adjustment.
Service time is reduced through the use of hinged, toolless panels. Such panels provide access to frequently inspected components and areas, including the control box, compressors, filters, indoor motor & blower, and the heating section. The panels are screwed in place at the factory to prevent access by children or other unauthorized persons. It is recommended that the panels be secured with screws once service is complete.
Service windows have been placed in both condenser section walls. Rotation of the cover allows easy access to the condenser coils for cleaning or inspection.
The unit control board utilizes flash codes to aid in diagnosis of unit malfunctions. Unique alarm codes quickly identify the source of the unit alarm.
All units use the same standard filter size. This standardization removes any confusion on which filter sizes are needed for replacement.
The non-corrosive drain pan slides out of the unit to permit easy cleaning. The drain pan is accessed by removing the drain pan cover plate on the rear of the unit. Once the plate is removed, the drain pan slides out through the rear of the unit.
All Predator® units have a second model nameplate located inside the control access door. This is to prevent deterioration of the nameplate through weathering.
- **Environmentally Aware** – For improved Indoor Air Quality, A combination of foil faced and elastometric rubber insulation is used exclusively throughout the units.
- **Convertible Airflow Design** – The side duct openings are covered when they leave the factory. If a side supply/return is desired, the installer simply removes the two side duct covers from the outside of the unit and installs them over the down shot openings. No panel cutting is required. Convertible airflow design allows maximum field flexibility and minimum inventory.
- **System Protection** - Suction line freezestats are supplied on all units to protect against loss of charge and coil frosting when the economizer operates at low outdoor air temperatures while the compressors are running. Every unit has solid-core liquid line filter-driers and high and low-pressure switches. Internal compressor protection is standard on all compressors. Crankcase heaters are standard on reciprocating compressors. Scroll compressors do not require crankcase heaters. Phase Monitors are standard on units with scroll compressors. This accessory monitors the incoming power to the unit and protects the unit from phase loss and reversed phase rotation.

- **Advanced Controls** - Simplicity® control boards have standardized a number of features previously available only as options or by utilizing additional controls.
- **Low Ambient** - An integrated low-ambient control allows all units to operate in the cooling mode down to 0°F outdoor ambient without additional assistance. Optionally, the control board can be programmed to lockout the compressors when the outdoor air temperature is low or when free cooling is available.

CAUTION

The Simplicity® control board used in this product will effectively operate the cooling system down to 0°F when this product is applied in a comfort cooling application for people. An economizer is typically included in this type of application. When applying this product for process cooling applications (computer rooms, switchgear, etc.), please reference applications bulletin AE-011-07 or call the applications department for Unitary Products @ 1-877-UPG-SERV for guidance. Additional accessories may be needed for stable operation at temperatures below 30° F.

- **Anti-Short Cycle Protection** - To aid compressor life, an anti-short cycle delay is incorporated into the standard controls. Compressor reliability is further ensured by programmable minimum run times. For testing, the anti-short cycle delay can be temporarily overridden with the push of a button.
- **Fan Delays** - Fan on and fan off delays are fully programmable. Furthermore, the heating and cooling fan delay times are independent of one another. All units are programmed with default values based upon their configuration of cooling and heat.
- **Safety Monitoring** - The control board monitors the high and low-pressure switches, the freezestats, the gas valve, if applicable, and the temperature limit switch on gas and electric heat units. The unit control board will alarm on ignition failures, compressor lockouts and repeated limit switch trips.
- **Nuisance Trip Protection and Strikes** - To prevent nuisance trouble calls, the control board uses a "three times, you're out" philosophy. The high and low-pressure switches and the freezestats must trip three times within two hours before the unit control board will lock out the associated compressor.
- **On Board Diagnostics** - Each alarm will energize a trouble light on the thermostat, if so equipped, and flash an alarm code on the control board LED. Each high and low-pressure switch alarm as well as each freezestat alarm has its own flash code. The control board saves the five most recent alarms in memory, and these alarms can be reviewed at any time. Alarms and programmed values are retained through the loss of power.
- **Reliable** – From the beginning – All units undergo computer automated testing before they leave the factory.

Units are tested for refrigerant charge and pressure, unit amperage, and 100% functionality. For the long term – All Predator® units are painted with a long lasting, powder paint that stands up over the life of the unit. The paint used has been proven by a 1000 hour salt spray test.

- **Flexible Placement** – All models and configurations share the same cabinet/footprint and thus the same roof curb. You have the flexibility to set one curb and choose the correct tonnage size and heating option after the internal loads have been determined.

To further simplify planning and installation, Predator® XP cabinets are designed to fit your roof. With the optional roof curb, the unit ductwork is designed to fit around 24" on-center joists or between 48" on-center joists.

The drain pan can be rotated to drain to either the front or the rear of the unit. Additionally, the drain pan can be fitted to drain through the roof curb. As it is sometimes difficult to have a level installation, the drain pan features a generous slope to ensure proper drainage.

- **Full Perimeter Base Rails** – The permanently attached base rails provide a solid foundation for the entire unit and protect the unit during shipment. The rails offer forklift access from 3 sides, and rigging holes are available so that an overhead crane can be used to place the units on a roof.
- **Easy Installation** – Electric utility knockouts are supplied in the unit underside as well as the side of the unit. A clearly identified location is provided to mount a field supplied electrical disconnect switch. Utility connections can be made quickly and with a minimum amount of field labor. All units are shipped with 2" throw-away filters installed.
- **Wide Range of Indoor Airflows** – All indoor fan motors are belt-drive type providing maximum flexibility to handle most airflow requirements. For high static applications, factory installed alternate indoor fan motors are available. With the optional indoor fan motor, all units can supply nominal airflow at a minimum of 1.5" ESP.
- **Warranty** - All models include a 1-year limited warranty on the complete unit. Compressors and electric heater elements each carry a 5-year warranty.

Factory Installed Options

YORK® offers several equipment options factory installed, for the Predator® line.

- **Optional Factory Installed Economizers** - Predator units offer a variety of optional factory installed economizers with low leak dampers. The outdoor air enthalpy sensor enables economizer operation if the outdoor enthalpy is less than the setpoint of the economizer logic module. See economizer options section to determine the correct economizer for your application.
- **Downflow Economizer - (With barometric relief)** - The economizer is provided with a single enthalpy input. The economizer is 2% low leakage type, and is shipped installed and wired. The installer needs only to assemble and mount the outdoor air hood (Provided). The economizer has spring return, fully modulating damper actuators and is capable of introducing up to 100% outdoor air. As the outdoor air intake dampers open, the return air dampers close. The changeover from mechanical refrigeration to economizer operation is

regulated by the standard single enthalpy input. There is an optional input dual dry bulb available. To meet regulated air standards, the economizer control accepts an optional CO₂ input for demand ventilation. With single enthalpy input, the economizer control monitors outdoor air. The dual enthalpy kit provides a second input used to monitor the return air. With a dual input kit installed, the economizer control compares the values of the two enthalpy or temperature inputs and positions the dampers to provide the maximum efficiency possible.

- **Horizontal Economizer - (Without barometric relief)** - All features of the downflow economizer exist except you must order the duct mount barometric relief separately. **You must order a 1EH0408 if you are installing a power exhaust. You can order a 1RD0411 Barometric Relief for horizontal flow economizers only.**
- **BAS Ready Economizer - (With barometric relief)** - The economizer is provided with an actuator that requires a 0-10V DC input from an external source (i.e., field installed building automation system controller). Power exhaust options are available. The economizer is 2% low leakage type with spring return and fully modulating dampers capable of introducing up to 100% outside air. Also include 2" pleated filters.
- **Slab Economizer for Energy Recovery Ventilators - (With barometric relief and Fresh Air Hood)** - The economizer is provided with a single enthalpy input. The economizer is 2% low leakage type, and is shipped installed and wired. The economizer has spring return, fully modulating damper actuators and is capable of introducing up to 100% outdoor air. As the outdoor air intake dampers open, the return air dampers close. The changeover from mechanical refrigeration to economizer operation is regulated by the standard single enthalpy input. There is an optional input dual dry bulb available. To meet regulated air standards, the economizer control accepts an optional CO₂ input for demand ventilation. With single enthalpy input, the economizer control monitors outdoor air. The dual enthalpy kit provides a second input used to monitor the return air. With a dual input kit installed, the economizer control compares the values of the two enthalpy or temperature inputs and positions the dampers to provide the maximum efficiency possible.
- **Power Exhaust (Downflow only)** - This accessory installs in the unit with a down flow economizer.
- **Motorized Outdoor Air Damper** - The motorized outdoor air damper includes a slide-in/plug-in damper assembly with an outdoor air hood and filters. The outdoor air dampers open to the preset position when the indoor fan motor is energized. The damper has a range of 0% to 100% outdoor air entry. Factory installed option or field installed accessory.
- **Alternate Indoor Blower Motor** - For applications with high static restrictions, units are offered with optional indoor motors that provide higher static output and/or higher airflow, depending upon the installer's needs.
- **Stainless Steel Drain Pan** - An optional rust-proof stainless steel drain pan is available to provide years of trouble-free operation in corrosive environments.

- **Electric Heaters** - The electric heaters range from 9kW to 54kW and are available in all the voltage options of the base units. All heaters are dual staged. All heaters are intended for single point power supply.
- **IntelliSpeed™ Supply Fan Control Option (ASHRAE 90.1 compliant, section 6.4.3.10)** - Units configured with the **IntelliSpeed™** Supply Fan Option will contain a VFD for variable volume supply fan operation. This option allows the supply fan RPM to vary based on the number of compressors or heating stages energized. The economizer's minimum position will also be configurable to vary based on the supply fan VFD frequency output.
- **Disconnect Switch** - For heat pump units with electric heat, a HACR breaker sized to the unit is provided. For heat pump units, a switch sized to the largest electric heat available for the particular unit is provided. Factory installed option only.
- **Convenience Outlet - (Non-Powered/Powered)** - This option locates a 120V single-phase GFCI outlet with cover, on the corner of the unit housing adjacent to the compressors. The "Non-powered" option requires the installer to provide the 120V single-phase power source and wiring. The "Powered" option is powered by a stepdown transformer in the unit. Factory installed option only.
- **Smoke Detectors** - The smoke detectors stop operation of the unit by interrupting power to the control board if smoke is detected within the air compartment. Available for both the supply and/or return air.

WARNING

Factory installed smoke detectors in the return air, may be subjected to freezing temperatures during "off" times due to outside air infiltration. These smoke detectors have an operational limit of 32 °F to 131°F. Smoke detectors installed in areas that could be outside those limitations will have to be moved to prevent having false alarms.

- **Filters** – 2" Pleated MERV 7 or 4" Pleated MERV 13 are available to meet LEED requirements. A 2" Throwaway is shipped as standard.
- **Phase Monitors** - Designed to prevent unit damage. The phase monitor will shut the unit down in an out-of phase condition. **(Standard on units with Scroll Compressors.)**
- **Coil Guard** - Customers can purchase a coil guard kit to protect the condenser coil from damage. Additionally, this kit stops animals and foreign objects from entering the space between the inner condenser coil and the main cabinet. This is not a hail guard kit.
- **Dirty Filter Switch** - This kit includes a differential pressure switch that energizes the fault light on the unit thermostat, indicating that there is an abnormally high pressure drop across the filters. Factory installed option or field installed accessory.
- **Technicoat Condenser Coils** - The condenser coils are coated with a phenolic coating for protection against corrosion due to harsh environments.

- **Technicoat Evaporator Coil** - The evaporator coils are coated with a phenolic coating for protection against corrosion due to harsh environments.
- **ElectroFin® E-coat Condenser Coils** - The condenser coils are coated with an epoxy polymer coating to protect against corrosion.
- **ElectroFin® E-coat Evaporator Coils** - The evaporator coils are coated with an epoxy polymer coating to protect against corrosion.

Control Options

- **BAS - Building Automation System Controls Simplicity® INTELLI-Comfort II™ Control** - The York® Simplicity® INTELLI-Comfort II™ control is factory installed. It includes a supply air sensor, a return air sensor, and an outside air sensor. There are provisions for a field installed dirty filter indicator switch, an air-proving switch, an Outside Air Humidity sensor, a Return Air Humidity sensor, an Inside IAQ sensor, and an Outside Air IAQ sensor. Construction mode operation, 365-day real time clock with 7 day programming plus holiday scheduling is built-in. Two different modes of demand ventilation are achieved through the INTELLI-Comfort II™ using CO₂ sensors. It uses an inside CO₂ sensor to perform Demand Ventilation. It can also use an Outside CO₂ sensor to perform Differential Demand Ventilation. It uses a Patented Comfort Ventilation algorithm to provide comfortable ventilation air temperature. The patented economizer-loading algorithm will protect the equipment when harsh operating conditions exist. Humidity in the occupied space or return duct can be monitored and controlled via humidity sensors and the on-board connection for hot gas re-heat system. It uses the INTELLI-Start™ algorithm to maximize energy savings by recovering the building from the Unoccupied Setpoints to the Occupied Setpoints just in time for the Occupied Time Period to begin. The Simplicity® INTELLI-Comfort II™ balances space temperature, ventilation air temperature, CO₂ and humidity for ultimate comfort.
- **Simplicity® INTELLI-Comfort II™ Control** - The York® Simplicity® INTELLI-Comfort II™ control is factory installed. It includes all the features of the INTELLI-Comfort II™ control with an additional control to translate communications from MODBUS to the BACnet MSTP protocol.
- **Novar® BAS Control** - The Novar® building automation system controller is factory installed. Includes supply air sensor, return air sensor, dirty filter indicator switch, and air proving switch.
- **Johnson Controls BAS Control** - The Johnson Control YK-UNT-1126 building automation system controller is factory installed. Includes supply air sensor, return air sensor, dirty filter indicator switch, and air proving switch.
- **CPC BAS Control** - The Computer Process Controls Model 810-3060 ARTC Advanced Rooftop building automation system controller is factory installed. Includes supply air sensor, return air sensor, dirty filter indicator switch and air proving switch.
- **Honeywell BAS Control** - The Honeywell W7750C building automation system controller is factory installed. Includes air supply sensor, return air sensor, dirty filter indicator switch, and air proving switch.

- **York Commercial Comfort System (YCCS)** - Provides rooftop system integration for YCCS single zone and change-over bypass systems.

Field Installed Accessories

YORK® offers several equipment accessories for field installation, for the Predator® line.

- **Downflow Economizer - (With barometric relief)** - The economizer is provided with a single enthalpy input. The economizer is 2% low leakage type. The economizer has spring return, fully modulating damper actuators and is capable of introducing up to 100% outdoor air. As the outdoor air intake dampers open, the return air dampers close. The changeover from mechanical refrigeration to economizer operation is regulated by the standard single enthalpy input. There is an optional input dual dry bulb available. To meet regulated air standards, the economizer control accepts an optional CO₂ input for demand ventilation. With single enthalpy input, the economizer control monitors outdoor air. The dual enthalpy kit provides a second input used to monitor the return air. With a dual input kit installed, the economizer control compares the values of the two enthalpy or temperature inputs and positions the dampers to provide the maximum efficiency possible.
- **Horizontal Economizer - (Without barometric relief)** - All features of the downflow economizer exist except you must order the duct mount barometric relief separately. **You must order a 1EH0408 if you are installing a power exhaust. You can order a 1RD0411 Barometric Relief for horizontal flow economizer.**
- **Slab Economizer for Energy Recovery Ventilator- (Without barometric relief or Fresh Air Hood)** - The economizer is provided with a single enthalpy input. The economizer is 2% low leakage type. The economizer has spring return, fully modulating damper actuators and is capable of introducing up to 100% outdoor air. As the outdoor air intake dampers open, the return air dampers close. The changeover from mechanical refrigeration to economizer operation is regulated by the standard single enthalpy input. There is an optional input dual dry bulb available. To meet regulated air standards, the economizer control accepts an optional CO₂ input for demand ventilation. With single enthalpy input, the economizer control monitors outdoor air. The dual enthalpy kit provides a second input used to monitor the return air. With a dual input kit installed, the economizer control compares the values of the two enthalpy or temperature inputs and positions the dampers to provide the maximum efficiency possible. **You can order 1EH0409 Barometric Relief/FA Hood for field installations without an ERV.**
- **Dual Enthalpy Control, Accessory** - This kit contains the required components to convert a single enthalpy economizer to dual enthalpy.
- **Barometric Relief Damper** - Zero to 100% capacity barometric relief dampers for use with horizontal flow, or field installed slab economizers.
- **Power Exhaust** - This accessory installs in the unit with a down flow economizer. Power exhaust plugs into the connector in the unit bulkhead. **You must purchase 1EH0408 barometric relief when applying to a horizontal flow application.**
- **Manual Outdoor Air Damper** - Like the motorized outdoor air damper, each manual outdoor air damper includes a slide-in damper assembly with an outdoor air hood and filters. Customers have a choice of dampers with ranges of 0% to 100% or 0% to 35% outdoor air entry.
- **Motorized Outdoor Air Damper** - The motorized outdoor air damper includes a slide-in/plug-in damper assembly with an outdoor air hood and filters. The outdoor air dampers open to the preset position when the indoor fan motor is energized. The damper has a range of 0% to 100% outdoor air entry. Factory installed option or field installed accessory.
- **Smoke Detectors** - The smoke detectors stop operation of the unit by interrupting power to the control board if smoke is detected within the air compartment.
- **CO₂ Sensor** - Senses CO₂ levels and automatically overrides the economizer when levels rise above the preset limits.
- **Dirty Filter Switch** - This kit includes a differential pressure switch that energizes the fault light on the unit thermostat, indicating that there is an abnormally high pressure drop across the filters.
- **Coil Guard** - Field installed decorative wire coil guard.
- **Hail Guard** - This kit includes a sloped hood which installs over the outside condenser coil and prevents damage to the coil fins from hail strikes. Field installed accessory only.
- **Electric Heaters** - The electric heaters range from 9 kW to 54kW and are available in all the voltage options of the base units. All heaters are dual staged. All units include an adapter panel for easy installation of the electric heaters. Necessary hardware and connectors are included with the heaters. All heaters are intended for single point power supply.
- **Low Limit / Compressor Lockout Kit**
 - **Compressor Lockout (CLO):** To prevent mechanical (compressorized) operation of the unit during cold outdoor conditions where there is a risk of returning liquid refrigerant back to the compressors.
 - **Low Limit Control (LLC):** To prevent the supply air from dropping below a specified setpoint by utilizing the units first stage heating means when there is a demand for cooling during cold outside conditions.
- **Metal Frame Filter Kit** - Metal frame with polyester filter medium.
- **Permanent Filters** - Permanent filters are available.
- **Roof Curbs** - The roof curbs have insulated decks and are shipped disassembled. The roof curbs are available in 8" and 14" heights. For applications with security concerns, burglar bars are available for the duct openings of the roof curbs.
- **Roof Curb Transition** - Single Piece Adapter (10" High) - Roof curbs for transitioning from Sunline™ units to Predator® units. Fits 7.5 to 12.5 Sunline™ roof curbs only.
- **Burglar Bars** - Mount in the supply and return openings to prevent entry into the duct work.
- **Thermostat** - The units are designed to operate with 24-volt electronic and electro-mechanical thermostats. All units (with or without an economizer) operate with two-stage heat/two-stage cool or two-stage cooling only thermostats, depending upon unit configuration.

Accessories

Part Number	Description
1RC0470	Roof Curb, 8" Height
1RC0471	Roof Curb, 14" Height
1RC0472	Roof Curb, Transition (7.5 T through 12.5 T)
1BD0408	Burglar Bars, Downflow
2TP04520925	Electric Heat 9kW 230V
2TP04521825	Electric Heat 18kW 230V
2TP04522425	Electric Heat 24kW 230V
2TP04523625	Electric Heat 36kW 230V
2TP04525425	Electric Heat 54kW 230V
2TP04520946	Electric Heat 9kW 460V
2TP04521846	Electric Heat 18kW 460V
2TP04522446	Electric Heat 24kW 460V
2TP04523646	Electric Heat 36kW 460V
2TP04525446	Electric Heat 54kW 460V
2TP04520958	Electric Heat 9kW 575V
2TP04521858	Electric Heat 18kW 575V
2TP04522458	Electric Heat 24kW 575V
2TP04523658	Electric Heat 36kW 575V
2TP04525458	Electric Heat 54kW 575V
2TP04540925	Electric Heat 9kW 230V, 42" Tall Cabinet
2TP04541825	Electric Heat 18kW 230V, 42" Tall Cabinet
2TP04542425	Electric Heat 24kW 230V, 42" Tall Cabinet
2TP04543625	Electric Heat 36kW 230V, 42" Tall Cabinet
2TP04540946	Electric Heat 9kW 460V, 42" Tall Cabinet
2TP04541846	Electric Heat 18kW 460V, 42" Tall Cabinet
2TP04542446	Electric Heat 24kW 460V, 42" Tall Cabinet
2TP04543646	Electric Heat 36kW 460V, 42" Tall Cabinet
2TP04540958	Electric Heat 9kW 575V, 42" Tall Cabinet
2TP04541858	Electric Heat 18kW 575V, 42" Tall Cabinet
2TP04542458	Electric Heat 24kW 575V, 42" Tall Cabinet
2TP04543658	Electric Heat 36kW 575V, 42" Tall Cabinet
1FA0413	Manual Outside Air Damper 0-35%, Downflow (Incl. Hood, Damper & Filters, No Barometric Relief)
1FA0414	Manual Outside Air Damper 0-100%, Downflow (Incl. Hood, Damper & Filters, No Barometric Relief)
2MD04702724	Motorized Damper, Downflow (Incl. Hood, Damper & Filter, no Barometric Relief)
2MD04703324	Motorized Damper, Horizontal (Incl. Hood, Damper & Filter, no Barometric Relief)
2EE04705924	Economizer, Downflow (Incl. Barometric Relief & All Hoods)
2EE04706024	Economizer, Horizontal (Incl. Dampers & Hoods, no Barometric Relief)
2EE04705724	Economizer, Slab, Downflow (Incl. Dampers only no Hoods or Barometric Relief), 50" Tall Cabinet
2EE04705824	"Downflow Economizer, Slab type for ERV (no Barometric Relief or FA hood)", 42" Tall Cabinet
2PE04703225	Power Exhaust, Downflow, 230V (For Units with Economizer only)
2PE04703246	Power Exhaust, Downflow, 460V (For Units with Economizer only)
2PE04703258	Power Exhaust, Downflow, 580V (For Units with Economizer only)
2EC04700924	Dual Enthalpy Control (Use with Single Enthalpy Economizer)
1EH0407	Hood Kit, Downflow Economizer (Included with all Downflow Economizers)
1RD0411	Barometric Relief Kit, Ductmount for Horizontal Application (Incl. Damper & Hood)
1EH0408	Barometric Relief Kit, Ductmount for Horizontal Application w/Power Exhaust (Incl. Damper & Hood)
1EH0409	Barometric Relief / Hood Kit, for Field Installed Slab Econ. w/o ERV (Incl. Barometric Relief & FA Hood)
2AQ04700424	CO2 Detector Unit Mount
2AQ04700324	CO2 Detector Space Mount
2SD04700824	Smoke Detector for Supply (All Gen 5 units with 2" & 4" Filters)
2SD04700924	Smoke Detector for Return (All Gen 5 units with 2" & 4" Filters)
2SD04701024	Smoke Detector for Supply and Return (All Gen 5 units with 2" & 4" Filters)
2MK04700624	Low Limit / Compressor Lockout Kit
1CG0419	Coil Guard (Electric / Electric & HP models), 8-1/2 and 10 Ton
1CG0424	Coil Guard (Electric / Electric and HP models), 12-1/2 Ton
1CG0427	Coil Guard (Electric / Electric & HP Models), 6-1/2 and 7-1/2 Ton
1HG0411	Hail Guard Kit
1HG0415	Hail Guard Kit, 42" Tall Cabinet
1FL0402	Permanent Filter Kit
1FL0423	Permanent Filter Kit, 42" Tall Cabinet
2DF0401	Dirty Filter Switch
1FF0414	2" only Metal Filter Frame Kit, 50" Tall Cabinet
1FF0415	2" only Metal Filter Frame Kit, 42" Tall Cabinet

Guide Specifications

GENERAL

Units shall be manufactured by York International Unitary Products in an ISO 9001 certified facility. YORK® Predator® units are convertible single packages with a common footprint cabinet and common roof curb for all 6-1/2 through 12-1/2 ton models. All units have two compressors with independent R-410a refrigeration circuits to provide 2 stages of cooling. The units were designed for light commercial applications and can be easily installed on a roof curb, slab, or frame. All Predator® units are self-contained and assembled on rigid full perimeter base rails allowing for 3-way forklift access and overhead rigging. Every unit is completely charged with R-410a, wired, piped, and tested at the factory to provide a quick and easy field installation. All units are convertible between side and down airflow. Independent economizer designs are used on side and down discharge applications, as well as all tonnage sizes. Predator® units are available in the following configurations: heat pump and heat pump with electric heat. Electric heaters are available as factory-installed options or field-installed accessories.

DESCRIPTION

Units shall be factory assembled, single package (Heat Pump), designed for outdoor installation. They shall have built in field convertible duct connections for down discharge supply/return or horizontal discharge supply/return and be available with factory installed options or field installed accessories. The units shall be factory wired, piped and charged with R-410a refrigerant and factory tested prior to shipment. All unit wiring shall be both numbered and color coded. The cooling performance shall be rated in accordance with DOE and AHRI test procedures. Units shall be CSA certified to ANSI Z21.47 and UL 1995/CAN/CSA No. 236-M90 standards.

UNIT CABINET

Unit cabinet shall be constructed of galvanized steel with exterior surfaces coated with a non-chalking, powder paint finish, certified at 1000 hour salt spray test per ASTM-B117 standards. Indoor blower sections shall be insulated with up to 1" thick insulation coated on the airside. Either aluminum foil faced or elastomeric rubber insulation shall be used in the unit's compartments and be fastened to prevent insulation from entering the air stream. Cabinet doors shall be hinged with toolless access for easy servicing and maintenance. Full perimeter base rails shall be provided to assure reliable transit of equipment, overhead rigging, fork truck access and proper sealing on roof curb applications. Disposable 2" filters shall be furnished and be accessible through hinged access door. Fan performance measuring ports shall be provided on the outside of the cabinet to allow accurate air measurements of evaporator fan performance without removing panels or creating bypass of the coils. Condensate pan shall be slide out design, constructed of a non corrosive material, internally sloped and conforming to ASHRAE 62-B9 standards. Condensate connection shall be a minimum of 3/4" I.D. female and be rigid mount connection.

INDOOR (EVAPORATOR) FAN ASSEMBLY

Fan shall be a belt drive assembly and include an adjustable pitch motor pulley. Job site selected brake horsepower shall not exceed the motors nameplate horsepower rating plus the service factor. Units shall be designed to operate within the service factor. Fan wheel shall be double inlet type with forward curve blades, dynamically balanced to operate smoothly throughout the entire range of operation. Airflow design shall be constant volume. Bearings shall be sealed and permanently lubricated for longer life and no maintenance. Entire blower assembly and motor shall be slide out design.

OUTDOOR (CONDENSER) FAN ASSEMBLY

The outdoor fans shall be of the direct drive type, discharge air vertically, have aluminum blades riveted to corrosion resistant steel spider brackets and shall be dynamically balanced for smooth operation. The outdoor fan motors shall have permanently lubricated bearings internally protected against overload conditions and staged independently. A cleaning window shall be provided on two sides of the units for coil cleaning.

REFRIGERANT COMPONENTS

Compressors:

- a. Shall be fully hermetic type, direct drive, internally protected with internal high-pressure relief and over temperature protection. The hermetic motor shall be suction gas cooled and have a voltage range of + or – 10% of the unit nameplate voltage.
- b. Shall have internal spring isolation and sound muffling to minimize vibration and noise, and be externally isolated on a dedicated, independent mounting.

Coils:

- a. Evaporator and condenser coils shall have aluminum plate fins mechanically bonded to seamless internally enhanced copper tubes with all joints brazed. Special Phenolic coating shall be available as a factory option.
- b. Evaporator and condenser coils shall be of the direct expansion, draw-thru design.

Refrigerant Circuit and Refrigerant Safety Components shall include:

- a. Independent fixed-orifice or thermally operated expansion devices.
- b. Solid core filter drier/strainer to eliminate any moisture or foreign matter.
- c. Accessible service gage connections on both suction and discharge lines to charge, evacuate, and measure refrigerant pressure during any necessary servicing or troubleshooting, without losing charge.
- d. The unit shall have two independent refrigerant circuits, equally split in 50% capacity increments.

Unit Controls:

- a. Unit shall be complete with self-contained low-voltage control circuit protected by a resettable circuit breaker on the 24-volt transformer side.
- b. Unit shall incorporate a lockout circuit which provides reset capability at the space thermostat or base unit should any of the following standard safety devices trip and shut off compressor:
 - c. Loss-of-charge/Low-pressure switch.
 - High-pressure switch.
 - Freeze-protection thermostat, evaporator coil. If any of the above safety devices trip, an LED (light-emitting diode) indicator shall flash a diagnostic code that indicates which safety switch has tripped.
 - d. Unit shall incorporate "AUTO RESET" compressor over temperature, over current protection.
 - e. Unit shall operate with conventional thermostat designs and have a low voltage terminal strip for easy hook-up.
 - f. Unit control board shall have on-board diagnostics and fault code display.
 - g. Standard controls shall include anti-short cycle and low voltage protection, and permit cooling operation down to 0 °F.
 - h. Control board shall monitor each refrigerant safety switch independently.
 - i. Control board shall retain last 5 fault codes in non-volatile memory, which will not be lost in the event of a power loss.

ELECTRIC HEATING SECTION (IF EQUIPPED)

An electric heating section, with nickel chromium elements, shall be provided in a range of 9 thru 54 KW, offering two states of capacity all sizes. The heating section shall have a primary limit control(s) (automatic reset) to prevent the heating element system from operating at an excessive temperature. The Heating Section assembly shall slide out of the unit for easy maintenance and service. Units with Electric Heating Sections shall be wired for a single point power supply with branch circuit fusing (where required).

UNIT OPERATING CHARACTERISTICS

Unit shall be capable of starting and running at 125 °F outdoor temperature, exceeding maximum load criteria of AHRI Standard 340/360. The compressor, with standard controls, shall be capable of operation down to 0 °F outdoor temperature.

ELECTRICAL REQUIREMENTS - All unit power wiring shall enter unit cabinet at a single factory provided location and be capable of side or bottom entry to minimize roof penetrations and avoid unit field modifications. Separate side and bottom openings shall be provided for the control wiring.

STANDARD LIMITED WARRANTIES - Compressor – 5 Years, Elect. Heat Elem. – 5 Years, Parts – 1 Year

FACTORY INSTALLED OPTIONAL OUTDOOR AIR (Shall be made available by either/or):

- **ELECTRONIC ENTHALPY AUTOMATIC ECONOMIZER** – Outdoor and return air dampers that are interlocked and positioned by a fully-modulating, spring-return damper actuator. The maximum leakage rate for the outdoor air intake dampers shall not exceed 2% when dampers are fully closed and operating against a pressure differential of 0.5 IWG. A unit-mounted potentiometer shall be provided to adjust the outdoor and return air damper assembly to take in outdoor air to meet the minimum ventilation requirement of the conditioned space during normal operation. During economizer operation, a mixed-air temperature control shall modulate the outdoor and return air damper assembly to prevent the supply air temperature from dropping below 55 °F. Changeover from compressor to economizer operation shall be provided by an integral electronic enthalpy control that feeds input into the basic module. The outdoor intake opening shall be covered with a rain hood that matches the exterior of the unit. Water eliminator/filters shall be provided. Simultaneous economizer/compressor operation is also possible. Dampers shall fully close on power loss. Available with barometric relief or power exhaust.
- **MOTORIZED OUTDOOR AIR DAMPERS** – Outdoor and return air dampers that are interlocked and positioned by a 2-position, spring-return damper actuator. The maximum leakage rate for the outdoor air intake dampers shall not exceed 2% when dampers are fully closed and operating against a pressure differential of 0.5 IWG. A unit-mounted potentiometer shall be provided to adjust the outdoor and return air damper assembly to take in the design CFM of outdoor air to meet the ventilation requirements of the conditioned space during normal operation. Whenever the indoor fan motor is energized, the dampers open up to one of two pre-selected positions – regardless of the outdoor air enthalpy. Dampers return to the fully closed position when the indoor fan motor is de-energized. Dampers shall fully close on power loss.

ADDITIONAL FACTORY INSTALLED OPTIONS

- **ALTERNATE INDOOR BLOWER MOTOR** – For applications with high restrictions, units are available with optional indoor blower motors that provide higher static output and/or higher airflow.
- **CONVENIENCE OUTLET (POWERED/NON-POWERED)**– Unit can be provided with an optional 120VAC GFCI outlet with cover on the corner of the unit housing the compressors.
- **ELECTRIC HEAT** - Electric Heaters range from 9 kW to 54 kW and are available in all the voltage options of the base unit.
- **PHASE MONITOR** - Designed to prevent damage in out-of-phase condition.
- **COIL GUARD** - Designed to prevent condenser coil damage.
- **BAS CONTROLS** - Include supply air sensor, return air sensor, dirty filter indicator and air proving switch.

- **DIRTY FILTER SWITCH** – This kit includes a differential pressure switch that energizes the fault light on the unit thermostat, indicating that there is an abnormally high-pressure drop across the filters.
- **BREAKER** – An HACR breaker can be factory installed on heat pumps or heat pumps with electric heat.
- **DISCONNECT SWITCH** - A disconnect can be factory installed on a cooling only units sized for the largest electric heat available.
- **SMOKE DETECTOR** – A smoke detector can be factory mounted and wired in the supply and/or return air compartments.

OTHER PRE-ENGINEERED ACCESSORIES AVAILABLE

- **ROOF CURB** - 14" and 8" high, full perimeter knockdown curb, with hinged design for quick assembly.
- **BAROMETRIC RELIEF DAMPER** – (Unit mounted – Downflow, Duct Mounted – Horizontal) – Contains a rain hood, air inlet screen, exhaust damper and mounting hardware. Used to relieve internal air pressure through the unit during economizer operation.
- **ECONOMIZER** (Downflow and Horizontal flow)
- **POWER EXHAUST** – (Unit mount – Downflow, Duct mount – Horizontal flow)
- **DUAL ENTHALPY KIT** - Provides a second input to economizer to monitor return air.

Physical Data

XP078-150 Physical Data

Component	Models				
	XP078	XP090	XP102	XP120	XP150
Nominal Tonnage	6.5	7.5	8.5	10	12.5
AHRI COOLING PERFORMANCE					
Gross Capacity @ AHRI A point (Mbh)	80000	94000	104000	122000	155000
AHRI net capacity (Mbh)	78000	90000	100000	117000	148000
EER	11.5	11.0	11.0	11.2	11.0
IEER	12.0	12.3	12.4	11.4	12.5
IPLV	12.4	12.4	12.4	12.4	11.9
Nominal CFM	2600	2800	3300	3750	4200
System power (KW)	6.78	8.15	9.10	10.45	13.60
Refrigerant type	R-410A	R-410A	R-410A	R-410A	R-410A
Refrigerant charge (lb-oz)					
System 1	14-2	9-8	13-8	12-14	16-0
System 2	12-10	9-0	13-0	12-12	16-0
AHRI HEATING PERFORMANCE					
47°F capacity rating (Mbh)	75.0	90.0	94.0	102.0	144.0
System power (KW) / COP	6.2 / 3.35	7.6 / 3.35	7.8 / 3.35	8.6 / 3.30	13.2 / 3.2
17°F capacity rating (Mbh)	43.0	55.0	57.0	58.0	87.0
System power (KW) / COP	5.7 / 2.20	7.0 / 2.25	7.3 / 2.25	7.8 / 2.20	11.9 / 2.05
HSPF (Btu/Watts-hr)	-	-	-	-	-
DIMENSIONS (inches)					
Length	89	89	89	89	119-7/16
Width	59	59	59	59	59
Height	50-3/4	42	50-3/4	50-3/4	50-3/4
OPERATING WT. (lbs.)	1080	920	1135	1135	1400
COMPRESSORS					
Type	Scroll	Scroll	Scroll	Scroll	Scroll
Quantity	2	2	2	2	2
Unit Capacity Steps (%)	50 / 100	50 / 100	50 / 100	50 / 100	50 / 100
CONDENSER COIL DATA					
Face area (Sq. Ft.)	29.0	23.8	29.0	29.0	47.5
Rows	2	2	2	2	2
Fins per inch	16	20	20	16	15
Tube diameter (in.)	3/8	3/8	3/8	3/8	3/8
Circuitry Type	Split-face	Split-face	Split-face	Split-face	Split-face
Refrigerant control	TXV	TXV	TXV	TXV	TXV
EVAPORATOR COIL DATA					
Face area (Sq. Ft.)	13.2	10.6	13.2	13.2	13.2
Rows	4	3	4	4	4
Fins per inch	15	15	15	15	15
Tube diameter	3/8	3/8	3/8	3/8	3/8
Circuitry Type	Split-face	Split-face	Split-face	Split-face	Split-face
Refrigerant control	TXV	TXV	TXV	TXV	TXV

XP078-150 Physical Data (Continued)

Component	Models									
	XP078		XP090		XP102		XP120		XP150	
Nominal Tonnage	6.5		7.5		8.5		10		12.5	
CONDENSER FAN DATA										
Quantity of Fans	2		2		2		2		4	
Fan diameter (Inch)	24		24		24		24		24	
Type	Prop		Prop		Prop		Prop		Prop	
Drive Type	Direct		Direct		Direct		Direct		Direct	
Quantity of motors	2		2		2		2		4	
Motor HP each	1/3		1/3		1/3		1/3		1/3	
No. speeds	1		1		1		1		1	
RPM	850		850		850		850		850	
Nominal total CFM	6800		6800		6800		6800		14000	
BELT DRIVE EVAP FAN DATA										
Quantity	1		1		1		1		1	
Fan Size (Inch)	15 x 15		12 x 12		15 x 15		15 x 15		15 x 15	
Type	Centrifugal		Centrifugal		Centrifugal		Centrifugal		Centrifugal	
Motor Sheave	VL40	VL44	1VM50	1VM50	1VM50	1VM50	1VM50	1VM50	1VM50	1VP56
Blower Sheave	AK84	AK71	AK74	AK61	AK89	AK74	AK84	AK74	AK74	BK77
Belt	A54	A52	A49	A49	A56	A54	A56	A54	A54	BX55
Motor HP each	1-1/2	2	1-1/2	3	2	3	2	3	3	5
RPM	1725	1725	1725	1725	1725	1725	1725	1725	1725	1725
Frame size	56	56	56	56	56	56	56	56	56	184T
FILTERS										
Quantity - Size	4 - (24 x 20 x 2) ^{1,2}		4 - (24 x 16 x 2) ^{1,2}		4 - (24 x 20 x 2) ^{1,2}		4 - (24 x 20 x 2) ^{1,2}		4 - (24 x 20 x 2) ^{1,2}	
	4 - (24 x 20 x 2) ³		4 - (24 x 16 x 4) ³		4 - (24 x 20 x 4) ³		4 - (24 x 20 x 2) ³		4 - (24 x 20 x 4) ³	

1. 2 In. Throwaway, Standard, MERV (Minimum Efficiency Reporting Value) 3.
2. 2 In. Pleated, Optional, MERV 7.
3. 4 In. Pleated, Optional, MERV 13.

XP078-150 Unit Limitations

Size (Tons)	Model	Unit Voltage	Unit Limitations		
			Applied Voltage		Outdoor DB Temp
			Min	Max	Max (°F)
078 (6.5)	XP	208/230-3-60	187	252	125
		460-3-60	432	504	125
		575-3-60	540	630	125
090 (7.5)	XP	208/230-3-60	187	252	125
		460-3-60	432	504	125
		575-3-60	540	630	125
102 (8.5)	XP	208/230-3-60	187	252	125
		460-3-60	432	504	125
		575-3-60	540	630	125
120 (10)	XP	208/230-3-60	187	252	125
		460-3-60	432	504	125
		575-3-60	540	630	125
150 (12.5)	XP	208/230-3-60	187	252	125
		460-3-60	432	504	125
		575-3-60	540	630	125

Capacity Performance

XP078-150 Cooling Capacities

XP078 (6.5 Ton)

Air on Evaporator Coil		Temperature of Air on Condenser Coil															
CFM	WB (°F)	Total Capacity ¹ (MBh)	Total Input (kW) ²	Sensible Capacity (MBh)						Total Capacity ¹ (MBh)	Total Input (kW) ²	Sensible Capacity (MBh)					
				Return Dry Bulb (°F)								Return Dry Bulb (°F)					
				90	85	80	75	70	65			90	85	80	75	70	65
		75°F								85°F							
1625	77	107.3	4.8	47.0	38.9	30.7	-	-	-	103.2	5.5	45.6	37.7	29.7	-	-	-
	72	99.2	4.7	57.9	49.8	41.7	33.5	-	-	94.7	5.4	56.2	48.3	40.4	32.5	-	-
	67	91.1	4.7	68.8	60.7	52.6	44.5	36.4	-	86.3	5.4	66.8	58.9	51.0	43.1	35.2	-
	62	81.6	4.6	81.6	70.5	61.8	53.7	45.5	37.4	78.4	5.3	78.4	70.8	61.1	53.2	45.3	37.4
1950	77	112.8	4.8	53.0	43.7	34.4	-	-	-	107.7	5.5	51.3	42.1	32.9	-	-	-
	72	104.3	4.8	65.2	55.9	46.6	37.3	-	-	98.9	5.5	63.0	53.8	44.6	35.5	-	-
	67	95.7	4.7	77.4	68.1	58.8	49.5	40.2	-	90.1	5.4	74.7	65.6	56.4	47.2	38.0	-
	62	85.8	4.7	85.8	78.4	69.1	59.8	50.5	41.2	81.8	5.4	81.8	76.8	67.6	58.4	49.2	40.0
	57	83.3	4.6	83.3	81.9	72.6	63.3	54.0	44.7	80.0	5.4	80.0	79.0	69.8	60.6	51.4	42.3
2275	77	118.3	4.9	58.9	48.5	38.0	-	-	-	112.3	5.5	56.9	46.5	36.0	-	-	-
	72	109.4	4.8	72.5	62.0	51.5	41.1	-	-	103.1	5.5	69.8	59.4	48.9	38.5	-	-
	67	100.4	4.8	86.0	75.5	65.1	54.6	44.1	-	93.9	5.5	82.7	72.2	61.8	51.3	40.9	-
	62	90.0	4.7	90.0	86.3	76.5	66.0	55.6	45.1	85.2	5.4	85.2	82.7	74.0	63.6	53.1	42.7
	57	87.4	4.7	87.4	86.7	80.3	69.8	59.4	48.9	83.4	5.4	83.4	82.9	76.5	66.0	55.6	45.1
2600	77	123.8	4.9	64.9	53.3	41.6	-	-	-	116.8	5.6	62.6	50.9	39.2	-	-	-
	72	114.4	4.9	79.7	68.1	56.5	44.8	-	-	107.2	5.5	76.6	64.9	53.2	41.5	-	-
	67	105.1	4.8	94.5	82.9	71.3	59.7	48.0	-	97.6	5.5	90.6	78.9	67.2	55.5	43.7	-
	62	94.2	4.8	94.2	94.2	83.8	72.2	60.6	48.9	88.7	5.4	88.7	88.7	80.5	68.8	57.1	45.3
	57	91.5	4.7	91.5	91.5	88.0	76.4	64.7	53.1	86.7	5.4	86.7	86.7	83.2	71.4	59.7	48.0
2925	72	117.9	4.9	85.1	72.4	59.7	47.0	-	-	109.4	5.5	82.4	69.5	56.6	43.8	-	-
	67	108.2	4.8	102.9	88.1	75.4	62.6	49.9	-	99.6	5.5	96.1	84.4	71.5	58.7	45.8	-
	62	97.1	4.8	97.1	97.1	90.5	77.8	65.1	52.4	90.5	5.4	90.5	90.5	85.7	72.9	60.0	47.1
	57	94.2	4.7	94.2	94.2	92.5	79.8	67.1	54.3	88.5	5.4	88.5	88.5	86.7	73.8	61.0	48.1
3250	72	121.3	4.9	90.6	76.7	62.9	49.1	-	-	111.6	5.5	88.1	74.1	60.1	46.1	-	-
	67	111.3	4.9	111.3	93.3	79.5	65.6	51.8	-	101.6	5.5	101.6	89.9	75.9	61.9	47.9	-
	62	99.9	4.8	99.9	99.9	97.3	83.5	69.6	55.8	92.3	5.4	92.3	92.3	91.0	77.0	62.9	48.9
	57	97.0	4.8	97.0	97.0	97.0	83.2	69.4	55.6	90.2	5.4	90.2	90.2	90.2	76.2	62.2	48.2
		95°F								105°F							
1625	77	99.2	6.2	44.1	36.5	28.8	-	-	-	92.8	7.0	39.9	33.2	25.5	-	-	-
	72	90.3	6.1	54.5	46.8	39.1	31.4	-	-	84.1	7.0	51.2	43.5	35.8	28.1	-	-
	67	81.5	6.1	64.8	57.1	49.4	41.7	34.0	-	75.4	7.0	62.6	53.9	46.2	38.5	30.8	-
	62	75.1	6.1	75.1	71.1	60.4	52.7	45.0	37.3	69.4	6.9	69.4	67.0	55.6	47.9	40.2	32.5
1950	77	102.7	6.2	49.6	40.5	31.4	-	-	-	95.7	7.0	46.0	37.0	28.0	-	-	-
	72	93.5	6.2	60.8	51.7	42.7	33.6	-	-	86.8	7.0	57.3	48.3	39.3	30.3	-	-
	67	84.4	6.1	72.1	63.0	53.9	44.9	35.8	-	77.8	7.0	68.7	59.7	50.7	41.7	32.7	-
	62	77.8	6.1	77.8	75.1	66.0	57.0	47.9	38.8	71.6	6.9	71.6	70.0	61.0	52.0	43.0	34.0
	57	76.7	6.1	76.7	76.1	67.0	57.9	48.9	39.8	71.9	6.9	71.9	70.8	61.8	52.8	43.8	34.8
2275	77	106.2	6.2	55.0	44.5	34.1	-	-	-	98.7	7.0	52.1	40.8	30.5	-	-	-
	72	96.8	6.2	67.2	56.7	46.3	35.8	-	-	89.4	7.0	63.4	53.1	42.8	32.5	-	-
	67	87.3	6.1	79.4	68.9	58.5	48.1	37.6	-	80.2	7.0	74.8	65.5	55.2	44.9	34.6	-
	62	80.4	6.1	80.4	79.1	71.6	61.2	50.7	40.3	73.8	6.9	73.8	73.0	66.4	56.1	45.8	35.5
	57	79.3	6.1	79.3	79.0	72.7	62.2	51.8	41.3	74.1	6.9	74.1	73.5	67.3	57.0	46.7	36.4
2600	77	109.8	6.2	60.4	48.6	36.7	-	-	-	101.6	7.0	58.2	44.6	33.0	-	-	-
	72	100.0	6.2	73.5	61.7	49.9	38.1	-	-	92.1	7.0	69.5	57.9	46.3	34.7	-	-
	67	90.2	6.1	86.7	74.9	63.1	51.2	39.4	-	82.6	7.0	80.8	71.3	59.7	48.1	36.5	-
	62	83.1	6.1	83.1	83.1	77.2	65.4	53.6	41.8	76.0	6.9	76.0	76.0	71.8	60.2	48.6	37.0
	57	82.0	6.1	82.0	82.0	78.4	66.5	54.7	42.9	76.3	6.9	76.3	76.3	72.8	61.2	49.6	38.0
2925	72	100.9	6.1	79.6	66.6	53.6	40.6	-	-	92.9	7.0	75.7	62.8	49.8	36.9	-	-
	67	91.1	6.1	89.3	80.7	67.7	54.7	41.7	-	83.3	6.9	82.4	76.3	64.2	51.3	38.3	-
	62	83.9	6.1	83.9	83.9	80.9	67.9	54.9	41.9	76.6	6.9	76.6	76.6	74.6	61.6	48.7	35.7
	57	82.7	6.1	82.7	82.7	80.9	67.9	54.9	41.9	77.0	6.9	77.0	77.0	75.2	62.3	49.3	36.3
3250	72	101.9	6.1	85.7	71.4	57.2	43.0	-	-	93.7	6.9	81.9	67.6	53.3	39.0	-	-
	67	91.9	6.1	91.9	86.5	72.3	58.1	43.9	-	84.0	6.9	84.0	81.4	68.7	54.4	40.1	-
	62	84.7	6.0	84.7	84.7	84.7	70.5	56.2	42.0	77.3	6.9	77.3	77.3	77.3	63.0	48.7	34.4
	57	83.5	6.0	83.5	83.5	83.5	69.3	55.1	40.8	77.7	6.9	77.7	77.7	77.7	63.3	49.0	34.7

XP078 (6.5 Ton) (Continued)

Air on Evaporator Coil		Temperature of Air on Condenser Coil																			
CFM	WB (°F)	Total Capacity ¹ (MBh)	Total Input (kW) ²	Sensible Capacity (MBh)						Total Capacity ¹ (MBh)	Total Input (kW) ²	Sensible Capacity (MBh)									
				Return Dry Bulb (°F)								Return Dry Bulb (°F)									
				90	85	80	75	70	65			90	85	80	75	70	65				
		115°F										125°F									
1625	77	86.5	7.8	35.6	29.9	22.2	-	-	-	80.1	8.7	30.4	26.7	19.0	-	-	-				
	72	77.9	7.8	48.0	40.3	32.6	24.9	-	-	71.7	8.6	44.8	37.1	29.4	21.7	-	-				
	67	69.4	7.8	60.5	50.7	43.0	35.3	27.6	-	63.3	8.6	58.3	47.5	39.8	32.1	24.4	-				
	62	63.7	7.8	63.7	62.9	50.7	43.0	35.3	27.6	58.0	8.6	58.0	58.0	45.8	38.1	30.4	22.7				
1950	77	88.8	7.8	42.4	33.5	24.6	-	-	-	81.8	8.7	38.8	30.0	21.1	-	-	-				
	72	80.0	7.8	53.8	44.9	36.0	27.1	-	-	73.2	8.6	50.4	41.5	32.6	23.8	-	-				
	67	71.2	7.8	65.3	56.4	47.4	38.5	29.6	-	64.6	8.6	61.9	53.0	44.2	35.3	26.5	-				
	62	65.4	7.8	65.4	64.9	55.9	47.0	38.1	29.2	59.2	8.6	59.2	59.2	50.9	42.0	33.2	24.3				
	57	67.1	7.7	67.1	65.5	56.5	47.6	38.7	29.8	62.4	8.5	62.4	60.2	51.3	42.5	33.6	24.7				
2275	77	91.1	7.8	49.3	37.0	26.9	-	-	-	83.5	8.6	47.3	33.3	23.2	-	-	-				
	72	82.1	7.8	59.7	49.5	39.4	29.2	-	-	74.7	8.6	55.9	45.9	35.9	25.9	-	-				
	67	73.1	7.8	70.1	62.0	51.9	41.7	31.6	-	65.9	8.6	65.5	58.6	48.6	38.6	28.6	-				
	62	67.1	7.8	67.1	66.8	61.2	51.0	40.9	30.7	60.4	8.6	60.4	60.4	56.0	46.0	36.0	26.0				
	57	68.9	7.7	68.9	68.1	61.9	51.7	41.5	31.4	63.7	8.5	63.7	62.6	56.5	46.4	36.4	26.4				
2600	77	93.4	7.8	56.1	40.5	29.2	-	-	-	85.2	8.6	55.7	36.5	25.4	-	-	-				
	72	84.2	7.8	65.5	54.1	42.8	31.4	-	-	76.2	8.6	61.5	50.3	39.2	28.0	-	-				
	67	74.9	7.8	74.9	67.7	56.3	45.0	33.6	-	67.3	8.6	67.3	64.1	53.0	41.8	30.7	-				
	62	68.8	7.8	68.8	68.8	66.5	55.1	43.7	32.3	61.6	8.6	61.6	61.6	61.1	49.9	38.8	27.6				
	57	70.6	7.7	70.6	70.6	67.2	55.8	44.4	33.0	65.0	8.5	65.0	65.0	61.6	50.4	39.3	28.1				
2925	72	84.9	7.8	71.9	59.0	46.1	33.2	-	-	76.8	8.6	68.0	55.2	42.4	29.5	-	-				
	67	75.6	7.8	75.6	72.0	60.7	47.8	35.0	-	67.8	8.6	67.8	67.6	57.3	44.4	31.6	-				
	62	69.4	7.8	69.4	69.4	68.2	55.3	42.4	29.5	62.1	8.6	62.1	62.1	61.8	49.0	36.2	23.3				
	57	71.2	7.7	71.2	71.2	69.5	56.6	43.7	30.8	65.5	8.5	65.5	65.5	63.8	51.0	38.1	25.3				
3250	72	85.6	7.8	78.2	63.8	49.4	35.0	-	-	77.4	8.6	74.5	60.0	45.5	31.0	-	-				
	67	76.2	7.8	76.2	76.2	65.1	50.7	36.3	-	68.3	8.6	68.3	68.3	61.5	47.0	32.5	-				
	62	69.9	7.8	69.9	69.9	69.9	55.5	41.1	26.7	62.6	8.6	62.6	62.6	62.6	48.1	33.6	19.1				
	57	71.8	7.7	71.8	71.8	71.8	57.4	43.0	28.6	66.0	8.5	66.0	66.0	66.0	51.5	37.0	22.5				

1. These capacities are gross ratings. For net capacity, deduct air blower motor, MBh = 3.415 x kW. Refer to the appropriate Blower Performance Table for the kW of the supply air blower motor.
2. These ratings include the condenser fan motors (total 1 kW) and the compressor motors but not the supply air blower motor.

XP090 (7.5 Ton)

Air on Evaporator Coil		Temperature of Air on Condenser Coil															
CFM	WB (°F)	Total Capacity ¹ (MBh)	Total Input (kW) ²	Sensible Capacity (MBh)						Total Capacity ¹ (MBh)	Total Input (kW) ²	Sensible Capacity (MBh)					
				Return Dry Bulb (°F)								Return Dry Bulb (°F)					
				90	85	80	75	70	65			90	85	80	75	70	65
		75°F								85°F							
1875	77	116.6	5.8	48.6	40.0	31.5	-	-	-	110.0	6.5	45.8	37.4	29.0	-	-	-
	72	107.8	5.7	62.9	54.3	45.7	37.2	-	-	101.4	6.5	59.8	51.4	43.0	34.6	-	-
	67	99.0	5.6	77.2	68.6	60.0	51.5	42.9	-	92.8	6.4	73.8	65.4	57.0	48.6	40.2	-
	62	93.7	5.5	93.7	85.2	74.6	66.1	57.5	48.9	86.4	6.3	86.4	82.1	70.6	62.2	53.8	45.4
2250	77	120.7	5.8	53.8	44.0	34.1	-	-	-	113.5	6.5	50.7	41.1	31.5	-	-	-
	72	111.7	5.7	69.3	59.5	49.6	39.8	-	-	104.7	6.5	65.9	56.3	46.7	37.1	-	-
	67	102.6	5.6	84.8	75.0	65.1	55.3	45.5	-	95.8	6.4	81.2	71.5	61.9	52.3	42.7	-
	62	97.0	5.6	97.0	91.3	81.0	71.2	61.4	51.5	89.2	6.3	89.2	86.3	76.7	67.1	57.5	47.9
	57	93.4	5.6	93.4	93.4	85.1	75.3	65.4	55.6	87.2	6.3	87.2	87.2	80.0	70.3	60.7	51.1
2625	77	124.9	5.8	59.0	47.9	36.8	-	-	-	117.1	6.6	55.6	44.8	34.0	-	-	-
	72	115.5	5.7	75.7	64.6	53.5	42.5	-	-	108.0	6.5	72.1	61.2	50.4	39.6	-	-
	67	106.1	5.6	92.4	81.3	70.2	59.2	48.1	-	98.8	6.4	88.5	77.7	66.8	56.0	45.2	-
	62	100.3	5.6	100.3	97.5	87.3	76.3	65.2	54.1	92.0	6.4	92.0	90.5	82.8	72.0	61.1	50.3
	57	96.6	5.6	96.6	96.6	91.8	80.7	69.6	58.6	90.0	6.4	90.0	90.0	86.3	75.5	64.6	53.8
3000	77	129.1	5.8	64.1	51.8	39.5	-	-	-	120.7	6.6	60.5	48.5	36.5	-	-	-
	72	119.4	5.7	82.1	69.7	57.4	45.1	-	-	111.2	6.5	78.2	66.1	54.1	42.1	-	-
	67	109.6	5.6	100.0	87.7	75.4	63.0	50.7	-	101.8	6.4	95.8	83.8	71.7	59.7	47.7	-
	62	103.7	5.6	103.7	103.7	93.7	81.4	69.1	56.7	94.8	6.4	94.8	94.8	88.8	76.8	64.8	52.7
	57	99.8	5.6	99.8	99.8	98.4	86.1	73.8	61.5	92.7	6.4	92.7	92.7	92.6	80.6	68.5	56.5
3375	72	120.8	5.7	87.0	73.9	60.7	47.6	-	-	112.2	6.5	83.4	70.4	57.4	44.5	-	-
	67	111.0	5.7	106.1	92.8	79.6	66.5	53.3	-	102.7	6.5	99.7	89.1	76.2	63.2	50.2	-
	62	104.9	5.6	104.9	104.9	99.9	86.8	73.6	60.5	95.6	6.4	95.6	95.6	92.6	79.6	66.7	53.7
	57	101.1	5.6	101.1	101.1	100.4	87.2	74.1	60.9	93.5	6.4	93.5	93.5	93.4	80.5	67.5	54.6
3750	72	122.3	5.7	91.9	78.0	64.0	50.0	-	-	113.1	6.5	88.6	74.7	60.8	46.9	-	-
	67	112.3	5.7	112.3	97.9	83.9	69.9	55.9	-	103.5	6.5	103.5	94.5	80.6	66.7	52.8	-
	62	106.2	5.6	106.2	106.2	106.2	92.2	78.2	64.2	96.4	6.4	96.4	96.4	96.4	82.5	68.6	54.7
	57	102.3	5.6	102.3	102.3	102.3	88.3	74.3	60.3	94.3	6.4	94.3	94.3	94.3	80.4	66.5	52.6
		95°F								105°F							
1875	77	103.4	7.3	43.0	34.8	26.5	-	-	-	95.4	8.2	37.5	31.2	23.2	-	-	-
	72	95.0	7.2	56.8	48.5	40.3	32.0	-	-	87.7	8.1	53.1	45.1	37.0	29.0	-	-
	67	86.6	7.2	70.5	62.3	54.0	45.8	37.5	-	79.9	8.1	68.7	58.9	50.9	42.9	34.8	-
	62	79.0	7.1	79.0	79.0	66.6	58.4	50.1	41.9	74.0	8.0	74.0	74.0	62.0	54.0	45.9	37.9
2250	77	106.3	7.3	47.7	38.2	28.8	-	-	-	97.6	8.2	43.7	34.5	25.3	-	-	-
	72	97.7	7.3	62.6	53.2	43.8	34.4	-	-	89.7	8.2	58.8	49.6	40.4	31.2	-	-
	67	89.0	7.2	77.6	68.1	58.7	49.3	39.9	-	81.8	8.1	73.9	64.7	55.5	46.3	37.1	-
	62	81.3	7.1	81.3	81.3	72.4	63.0	53.6	44.2	75.7	8.0	75.7	75.7	67.6	58.4	49.2	40.0
	57	81.1	7.1	81.1	81.1	74.8	65.4	56.0	46.6	75.4	8.0	75.4	75.4	69.1	59.9	50.7	41.5
2625	77	109.3	7.4	52.3	41.7	31.1	-	-	-	99.9	8.3	49.8	37.7	27.4	-	-	-
	72	100.4	7.3	68.4	57.9	47.3	36.7	-	-	91.8	8.2	64.5	54.1	43.8	33.4	-	-
	67	91.5	7.2	84.6	74.0	63.4	52.8	42.2	-	83.7	8.1	79.2	70.5	60.2	49.8	39.4	-
	62	83.6	7.1	83.6	83.6	78.2	67.6	57.0	46.5	77.5	8.1	77.5	77.5	73.3	62.9	52.5	42.2
	57	83.4	7.1	83.4	83.4	80.8	70.2	59.6	49.0	77.1	8.1	77.1	77.1	74.8	64.5	54.1	43.7
3000	77	112.2	7.4	56.9	45.2	33.4	-	-	-	102.1	8.3	56.0	41.0	29.5	-	-	-
	72	103.1	7.3	74.3	62.5	50.8	39.0	-	-	93.8	8.2	70.2	58.7	47.1	35.6	-	-
	67	94.0	7.2	91.6	79.9	68.1	56.3	44.6	-	85.6	8.1	84.4	76.3	64.8	53.3	41.7	-
	62	85.8	7.2	85.8	85.8	84.0	72.2	60.5	48.7	79.2	8.1	79.2	79.2	78.9	67.4	55.8	44.3
	57	85.6	7.2	85.6	85.6	86.8	75.0	63.3	51.5	78.8	8.1	78.8	78.8	80.6	69.1	57.5	46.0
3375	72	103.5	7.3	79.7	67.0	54.2	41.4	-	-	93.9	8.2	75.2	62.7	50.2	37.7	-	-
	67	94.4	7.3	93.2	85.5	72.7	59.9	47.2	-	85.6	8.2	85.1	80.1	69.0	56.5	44.1	-
	62	86.2	7.2	86.2	86.2	85.3	72.5	59.7	47.0	79.3	8.1	79.3	79.3	79.1	66.7	54.2	41.7
	57	86.0	7.2	86.0	86.0	86.5	73.8	61.0	48.2	78.9	8.1	78.9	78.9	79.8	67.3	54.8	42.3
3750	72	104.0	7.3	85.2	71.4	57.6	43.8	-	-	94.0	8.3	80.1	66.7	53.3	39.8	-	-
	67	94.8	7.3	94.8	91.1	77.3	63.5	49.7	-	85.7	8.2	85.7	83.9	73.2	59.8	46.4	-
	62	86.5	7.2	86.5	86.5	86.5	72.8	59.0	45.2	79.4	8.1	79.4	79.4	79.4	65.9	52.5	39.1
	57	86.3	7.2	86.3	86.3	86.3	72.5	58.7	45.0	79.0	8.1	79.0	79.0	79.0	65.6	52.1	38.7

XP090 (7.5 Ton) (Continued)

Air on Evaporator Coil		Temperature of Air on Condenser Coil															
CFM	WB (°F)	Total Capacity ¹ (MBh)	Total Input (kW) ²	Sensible Capacity (MBh)						Total Capacity ¹ (MBh)	Total Input (kW) ²	Sensible Capacity (MBh)					
				Return Dry Bulb (°F)								Return Dry Bulb (°F)					
				90	85	80	75	70	65			90	85	80	75	70	65
		115°F								125°F							
1875	77	87.4	9.1	32.0	27.6	19.8	-	-	-	79.5	10.1	25.8	23.8	16.5	-	-	-
	72	80.3	9.1	49.4	41.6	33.8	26.0	-	-	73.0	10.0	45.8	38.2	30.6	23.0	-	-
	67	73.3	9.0	66.9	55.6	47.8	40.0	32.2	-	66.6	9.9	65.4	52.3	44.7	37.1	29.5	-
	62	68.9	8.9	68.9	68.9	57.4	49.6	41.7	33.9	63.9	9.9	63.9	63.9	52.7	45.1	37.5	29.9
2250	77	89.0	9.2	39.7	30.7	21.7	-	-	-	80.3	10.1	35.7	26.9	18.1	-	-	-
	72	81.7	9.1	55.0	46.0	37.0	28.1	-	-	73.8	10.0	51.2	42.4	33.7	24.9	-	-
	67	74.5	9.0	70.3	61.3	52.4	43.4	34.4	-	67.3	9.9	66.7	57.9	49.2	40.4	31.7	-
	62	70.1	9.0	70.1	70.1	62.9	53.9	44.9	35.9	64.5	9.9	64.5	64.5	58.1	49.3	40.6	31.8
	57	69.6	9.0	69.6	69.6	63.3	54.4	45.4	36.4	63.9	9.9	63.9	63.9	57.6	48.8	40.1	31.3
2625	77	90.5	9.2	47.4	33.7	23.6	-	-	-	81.1	10.1	45.5	30.1	19.8	-	-	-
	72	83.2	9.1	60.6	50.4	40.3	30.1	-	-	74.5	10.0	56.6	46.7	36.8	26.8	-	-
	67	75.8	9.0	73.7	67.1	56.9	46.8	36.6	-	68.0	9.9	68.0	63.6	53.7	43.8	33.8	-
	62	71.3	9.0	71.3	71.3	68.3	58.2	48.1	37.9	65.2	9.9	65.2	65.2	63.4	53.5	43.6	33.6
	57	70.8	9.0	70.8	70.8	68.9	58.7	48.6	38.4	64.6	9.9	64.6	64.6	62.9	53.0	43.0	33.1
3000	77	92.0	9.2	55.1	36.8	25.5	-	-	-	81.9	10.1	55.4	33.2	21.5	-	-	-
	72	84.6	9.1	66.1	54.8	43.5	32.2	-	-	75.3	10.1	62.0	50.9	39.9	28.8	-	-
	67	77.1	9.1	77.1	72.8	61.5	50.2	38.9	-	68.7	10.0	68.7	68.7	58.2	47.1	36.0	-
	62	72.5	9.0	72.5	72.5	73.8	62.5	51.2	39.9	65.9	9.9	65.9	65.9	65.9	57.6	46.6	35.5
	57	72.0	9.0	72.0	72.0	74.4	63.1	51.8	40.5	65.2	9.9	65.2	65.2	65.2	57.1	46.0	34.9
3375	72	84.3	9.2	70.6	58.4	46.2	34.0	-	-	74.8	10.1	66.0	54.1	42.2	30.3	-	-
	67	76.9	9.1	76.9	74.8	65.3	53.1	41.0	-	68.2	10.0	68.2	68.2	61.6	49.8	37.9	-
	62	72.4	9.0	72.4	72.4	73.0	60.8	48.6	36.4	65.4	10.0	65.4	65.4	65.4	55.0	43.1	31.2
	57	71.8	9.0	71.8	71.8	73.0	60.8	48.7	36.5	64.8	10.0	64.8	64.8	64.8	54.4	42.5	30.6
3750	72	84.1	9.2	75.1	62.0	48.9	35.9	-	-	74.2	10.1	70.0	57.3	44.6	31.9	-	-
	67	76.7	9.1	76.7	76.7	69.2	56.1	43.0	-	67.7	10.0	67.7	67.7	65.1	52.4	39.7	-
	62	72.2	9.1	72.2	72.2	72.2	59.1	46.0	33.0	65.0	10.0	65.0	65.0	65.0	52.3	39.6	26.9
	57	71.7	9.0	71.7	71.7	71.7	58.6	45.5	32.5	64.3	10.0	64.3	64.3	64.3	51.6	38.9	26.2

1. These capacities are gross ratings. For net capacity, deduct air blower motor, MBh = 3.415 x kW. Refer to the appropriate Blower Performance Table for the kW of the supply air blower motor.
2. These ratings include the condenser fan motors (total 1 kW) and the compressor motors but not the supply air blower motor.

XP102 (8.5 Ton)

Air on Evaporator Coil		Temperature of Air on Condenser Coil															
CFM	WB (°F)	Total Capacity ¹ (MBh)	Total Input (kW) ²	Sensible Capacity (MBh)						Total Capacity ¹ (MBh)	Total Input (kW) ²	Sensible Capacity (MBh)					
				Return Dry Bulb (°F)								Return Dry Bulb (°F)					
				90	85	80	75	70	65			90	85	80	75	70	65
		75°F								85°F							
2125	77	120.9	6.2	58.3	45.7	36.0	-	-	-	118.6	7.0	52.6	42.8	32.9	-	-	-
	72	113.7	6.1	69.9	60.2	50.5	40.8	-	-	109.4	6.9	67.3	57.4	47.6	37.7	-	-
	67	106.4	6.0	81.4	74.6	65.0	55.3	45.6	-	100.2	6.9	82.0	72.1	62.3	52.4	42.5	-
	62	96.7	5.9	96.7	94.3	79.3	69.6	59.9	50.2	92.3	6.8	92.3	91.1	75.4	65.6	55.7	45.9
2550	77	126.2	6.2	62.1	51.0	39.8	-	-	-	123.3	7.0	59.3	47.9	36.6	-	-	-
	72	118.6	6.1	78.1	67.0	55.8	44.7	-	-	113.7	7.0	75.6	64.2	52.9	41.5	-	-
	67	110.9	6.0	94.1	83.0	71.8	60.7	49.5	-	104.2	6.9	91.9	80.5	69.2	57.8	46.4	-
	62	100.9	6.0	100.9	99.3	87.7	76.5	65.4	54.3	96.0	6.8	96.0	95.2	83.8	72.4	61.0	49.7
	57	100.3	5.9	100.3	100.5	89.7	78.6	67.5	56.3	95.7	6.8	95.7	95.7	84.5	73.1	61.7	50.3
2975	77	131.4	6.2	65.9	56.2	43.6	-	-	-	128.0	7.0	66.0	53.1	40.2	-	-	-
	72	123.5	6.1	86.3	73.7	61.2	48.6	-	-	118.1	7.0	83.9	71.0	58.1	45.2	-	-
	67	115.5	6.0	106.8	91.3	78.7	66.1	53.5	-	108.1	6.9	101.8	89.0	76.1	63.2	50.3	-
	62	105.1	6.0	105.1	104.3	96.1	83.5	70.9	58.3	99.6	6.9	99.6	99.2	92.2	79.3	66.4	53.5
	57	104.4	6.0	104.4	104.6	98.3	85.8	73.2	60.6	99.3	6.9	99.3	99.3	92.9	80.0	67.1	54.2
3400	77	136.7	6.2	69.7	61.5	47.5	-	-	-	132.7	7.1	72.7	58.3	43.8	-	-	-
	72	128.4	6.1	94.6	80.5	66.5	52.5	-	-	122.4	7.0	92.2	77.8	63.4	49.0	-	-
	67	120.1	6.0	119.5	99.6	85.6	71.5	57.5	-	112.1	7.0	111.8	97.4	83.0	68.5	54.1	-
	62	109.3	6.0	109.3	109.3	104.5	90.4	76.4	62.4	103.3	6.9	103.3	103.3	100.5	86.1	71.7	57.3
	57	108.6	6.0	108.6	108.6	106.9	92.9	78.9	64.9	103.0	6.9	103.0	103.0	101.3	86.9	72.5	58.1
3825	72	132.2	6.2	101.6	86.1	70.7	55.3	-	-	125.5	7.1	99.2	83.4	67.6	51.8	-	-
	67	123.6	6.1	123.3	106.7	91.0	75.5	60.1	-	115.0	7.0	114.8	104.3	88.4	72.6	56.8	-
	62	112.5	6.0	112.5	112.5	110.1	94.7	79.2	63.8	105.9	6.9	105.9	105.9	104.5	88.7	72.9	57.1
	57	111.8	6.0	111.8	111.8	111.0	95.5	80.1	64.7	105.6	6.9	105.6	105.6	104.8	88.9	73.1	57.3
4250	72	136.0	6.3	108.6	91.8	74.9	58.1	-	-	128.6	7.1	106.2	89.0	71.8	54.5	-	-
	67	127.2	6.2	127.2	113.8	96.4	79.5	62.7	-	117.8	7.0	117.8	111.1	93.9	76.7	59.4	-
	62	115.7	6.1	115.7	115.7	115.7	98.9	82.1	65.2	108.6	7.0	108.6	108.6	108.6	91.3	74.1	56.8
	57	115.0	6.1	115.0	115.0	115.0	98.2	81.4	64.5	108.2	7.0	108.2	108.2	108.2	91.0	73.7	56.5
		95°F								105°F							
2125	77	116.2	7.8	46.9	39.8	29.8	-	-	-	107.5	8.9	44.1	37.9	28.3	-	-	-
	72	105.1	7.8	64.7	54.7	44.7	34.7	-	-	97.2	8.8	62.6	52.5	42.4	32.3	-	-
	67	94.0	7.8	82.5	69.6	59.6	49.5	39.5	-	86.8	8.8	81.1	67.1	56.5	46.4	36.3	-
	62	87.9	7.7	87.9	87.9	71.6	61.6	51.5	41.5	80.7	8.7	80.7	80.7	68.6	58.5	48.4	38.3
2550	77	120.4	7.8	56.5	44.9	33.3	-	-	-	111.4	8.9	56.2	43.5	31.8	-	-	-
	72	108.9	7.8	73.1	61.5	49.9	38.3	-	-	100.6	8.9	71.1	59.4	47.6	35.9	-	-
	67	97.4	7.8	89.7	78.1	66.5	54.9	43.3	-	89.9	8.8	86.0	75.2	63.5	51.7	40.0	-
	62	91.1	7.7	91.1	91.1	79.9	68.3	56.7	45.1	83.5	8.7	83.5	83.5	77.0	65.3	53.5	41.8
	57	91.1	7.7	91.1	90.8	79.2	67.6	56.0	44.4	85.1	8.8	85.1	85.0	73.3	61.6	49.8	38.1
2975	77	124.5	7.9	66.1	50.0	36.8	-	-	-	115.2	9.0	68.4	49.2	35.3	-	-	-
	72	112.6	7.9	81.5	68.3	55.1	41.9	-	-	104.0	8.9	79.7	66.3	52.9	39.4	-	-
	67	100.7	7.8	96.9	86.6	73.4	60.2	47.0	-	92.9	8.9	91.0	83.4	70.4	57.0	43.6	-
	62	94.2	7.7	94.2	94.2	88.2	75.0	61.8	48.6	86.4	8.8	86.4	86.4	85.5	72.1	58.7	45.2
	57	94.2	7.7	94.2	94.1	87.5	74.3	61.0	47.8	88.0	8.8	88.0	87.9	81.4	67.9	54.5	41.1
3400	77	128.7	7.9	75.7	55.0	40.2	-	-	-	119.0	9.0	80.5	54.8	38.8	-	-	-
	72	116.4	7.9	89.9	75.1	60.3	45.5	-	-	107.5	9.0	88.3	73.2	58.1	43.0	-	-
	67	104.1	7.9	104.1	95.2	80.4	65.6	50.8	-	96.0	8.9	96.0	91.5	77.4	62.3	47.2	-
	62	97.4	7.8	97.4	97.4	96.6	81.8	67.0	52.2	89.2	8.8	89.2	89.2	93.9	78.9	63.8	48.7
	57	97.4	7.8	97.4	97.4	95.7	80.9	66.1	51.3	90.9	8.8	90.9	90.9	89.4	74.3	59.2	44.1
3825	72	118.8	7.9	96.9	80.7	64.4	48.2	-	-	109.5	9.0	95.4	78.8	62.2	45.6	-	-
	67	106.3	7.9	106.3	101.8	85.9	69.7	53.4	-	97.8	8.9	97.8	95.6	82.9	66.3	49.7	-
	62	99.4	7.8	99.4	99.4	99.0	82.8	66.5	50.3	90.9	8.8	90.9	90.9	93.3	76.7	60.1	43.5
	57	99.4	7.8	99.4	99.4	98.6	82.3	66.1	49.9	92.6	8.8	92.6	92.6	91.9	75.3	58.7	42.1
4250	72	121.3	7.9	103.9	86.2	68.6	50.9	-	-	111.6	9.0	102.5	84.4	66.3	48.2	-	-
	67	108.4	7.9	108.4	108.4	91.4	73.8	56.1	-	99.7	8.9	99.7	99.7	88.4	70.3	52.2	-
	62	101.4	7.8	101.4	101.4	101.4	83.8	66.1	48.4	92.6	8.9	92.6	92.6	92.6	74.6	56.5	38.4
	57	101.4	7.8	101.4	101.4	101.4	83.8	66.1	48.5	94.4	8.9	94.4	94.4	94.4	76.3	58.2	40.1

XP102 (8.5 Ton) (Continued)

Air on Evaporator Coil		Temperature of Air on Condenser Coil															
CFM	WB (°F)	Total Capacity ¹ (MBh)	Total Input (kW) ²	Sensible Capacity (MBh)						Total Capacity ¹ (MBh)	Total Input (kW) ²	Sensible Capacity (MBh)					
				Return Dry Bulb (°F)								Return Dry Bulb (°F)					
				90	85	80	75	70	65			90	85	80	75	70	65
		115°F										125°F					
2125	77	98.9	10.0	41.2	36.0	26.8	-	-	-	90.2	11.1	44.1	31.8	25.3	-	-	-
	72	89.2	9.9	60.4	50.3	40.1	30.0	-	-	81.3	11.0	58.2	48.0	37.8	27.6	-	-
	67	79.6	9.8	79.6	64.5	53.4	43.3	33.2	-	72.4	10.9	72.4	62.0	50.4	40.2	30.0	-
	62	73.4	9.7	73.4	73.4	65.6	55.4	45.3	35.2	66.2	10.8	66.2	66.2	66.2	52.3	42.2	32.0
2550	77	102.3	10.0	55.9	42.2	30.3	-	-	-	93.3	11.1	59.4	40.8	28.8	-	-	-
	72	92.4	9.9	69.1	57.3	45.4	33.5	-	-	84.1	11.0	67.2	55.1	43.1	31.1	-	-
	67	82.4	9.8	82.4	72.3	60.5	48.6	36.7	-	74.9	10.9	74.9	69.4	57.4	45.4	33.4	-
	62	76.0	9.8	76.0	76.0	74.1	62.3	50.4	38.5	68.5	10.8	68.5	68.5	68.5	59.2	47.2	35.2
	57	79.1	9.8	79.1	79.1	67.5	55.6	43.7	31.8	73.1	10.8	73.1	73.1	61.6	49.6	37.6	25.5
2975	77	105.8	10.1	70.7	48.4	33.8	-	-	-	96.4	11.2	74.8	49.9	32.3	-	-	-
	72	95.5	10.0	77.9	64.3	50.6	37.0	-	-	86.9	11.0	76.1	62.2	48.4	34.6	-	-
	67	85.1	9.9	85.1	80.1	67.5	53.8	40.2	-	77.3	10.9	77.3	76.9	64.5	50.6	36.8	-
	62	78.5	9.8	78.5	78.5	82.7	69.1	55.5	41.8	70.7	10.8	70.7	70.7	70.7	66.1	52.3	38.5
	57	81.8	9.8	81.8	81.8	75.3	61.6	48.0	34.4	75.6	10.9	75.6	75.6	69.2	55.3	41.5	27.7
3400	77	109.2	10.1	85.4	54.6	37.3	-	-	-	99.5	11.2	90.2	58.9	35.9	-	-	-
	72	98.6	10.0	86.6	71.3	55.9	40.5	-	-	89.7	11.1	85.0	69.4	53.7	38.0	-	-
	67	87.9	9.9	87.9	87.9	74.5	59.1	43.7	-	79.8	10.9	79.8	79.8	71.5	55.8	40.2	-
	62	81.1	9.8	81.1	81.1	91.3	75.9	60.6	45.2	73.0	10.9	73.0	73.0	73.0	73.0	57.4	41.7
	57	84.4	9.9	84.4	84.4	83.1	67.7	52.3	37.0	78.0	10.9	78.0	78.0	76.8	61.1	45.5	29.8
3825	72	100.3	10.0	93.9	76.9	60.0	43.0	-	-	91.0	11.1	91.0	75.1	57.8	40.5	-	-
	67	89.4	9.9	89.4	89.4	79.9	63.0	46.0	-	81.0	11.0	81.0	81.0	76.9	59.6	42.3	-
	62	82.5	9.9	82.5	82.5	87.6	70.7	53.7	36.8	74.0	10.9	74.0	74.0	74.0	64.6	47.3	30.0
	57	85.9	9.9	85.9	85.9	85.2	68.3	51.3	34.4	79.1	10.9	79.1	79.1	78.5	61.2	43.9	26.6
4250	72	101.9	10.1	101.1	82.6	64.1	45.6	-	-	92.3	11.1	92.3	80.8	61.8	42.9	-	-
	67	90.9	10.0	90.9	90.9	85.4	66.8	48.3	-	82.1	11.0	82.1	82.1	82.1	63.4	44.4	-
	62	83.9	9.9	83.9	83.9	83.9	65.4	46.8	28.3	75.1	10.9	75.1	75.1	75.1	56.2	37.2	18.3
	57	87.3	9.9	87.3	87.3	87.3	68.8	50.3	31.8	80.3	11.0	80.3	80.3	80.3	61.3	42.4	23.4

1. These capacities are gross ratings. For net capacity, deduct air blower motor, MBh = 3.415 x kW. Refer to the appropriate Blower Performance Table for the kW of the supply air blower motor.
2. These ratings include the condenser fan motors (total 1 kW) and the compressor motors but not the supply air blower motor.

XP120 (10 Ton)

Air on Evaporator Coil		Temperature of Air on Condenser Coil															
CFM	WB (°F)	Total Capacity ¹ (MBh)	Total Input (kW) ²	Sensible Capacity (MBh)						Total Capacity ¹ (MBh)	Total Input (kW) ²	Sensible Capacity (MBh)					
				Return Dry Bulb (°F)								Return Dry Bulb (°F)					
				90	85	80	75	70	65			90	85	80	75	70	65
		75°F								85°F							
2500	77	143.9	7.2	59.2	48.0	36.8	-	-	-	137.1	8.3	60.8	49.9	38.9	-	-	-
	72	137.2	7.0	79.6	68.4	57.3	46.1	-	-	129.6	8.1	79.2	68.3	57.3	46.4	-	-
	67	130.5	6.9	100.1	88.9	77.7	66.6	55.4	-	122.0	7.9	97.6	86.7	75.7	64.8	53.8	-
	62	121.6	6.9	121.6	112.1	92.0	80.8	69.7	58.5	113.8	7.9	113.8	109.1	93.2	82.3	71.3	60.4
3000	77	147.9	7.2	65.7	53.3	40.8	-	-	-	140.7	8.3	67.3	54.8	42.3	-	-	-
	72	141.0	7.0	88.3	75.9	63.4	51.0	-	-	133.0	8.1	87.3	74.8	62.2	49.7	-	-
	67	134.1	6.9	110.9	98.4	86.0	73.5	61.1	-	125.3	7.9	107.2	94.7	82.2	69.7	57.2	-
	62	124.9	6.9	124.9	118.6	101.9	89.5	77.0	64.6	116.9	7.9	116.9	113.7	101.2	88.7	76.2	63.7
	57	127.2	6.8	127.2	117.6	105.2	92.7	80.3	67.8	120.0	7.8	120.0	114.3	101.8	89.2	76.7	64.2
3500	77	151.8	7.2	72.3	58.6	44.9	-	-	-	144.4	8.3	73.8	59.7	45.6	-	-	-
	72	144.7	7.0	97.0	83.3	69.6	55.8	-	-	136.5	8.1	95.3	81.2	67.2	53.1	-	-
	67	137.7	6.9	121.7	108.0	94.2	80.5	66.8	-	128.6	7.9	116.9	102.8	88.7	74.6	60.5	-
	62	128.2	6.9	128.2	125.1	111.8	98.1	84.4	70.6	119.9	7.9	119.9	118.3	109.2	95.1	81.0	66.9
	57	130.6	6.8	130.6	125.8	115.3	101.6	87.8	74.1	123.2	7.8	123.2	120.3	109.8	95.7	81.6	67.6
4000	77	155.8	7.2	78.9	63.9	48.9	-	-	-	148.1	8.3	80.3	64.6	49.0	-	-	-
	72	148.5	7.1	105.7	90.7	75.7	60.7	-	-	139.9	8.1	103.4	87.7	72.1	56.4	-	-
	67	141.3	6.9	132.5	117.5	102.5	87.5	72.5	-	131.8	8.0	126.5	110.8	95.2	79.5	63.9	-
	62	131.6	6.9	131.6	131.6	121.7	106.7	91.7	76.7	123.0	7.9	123.0	123.0	117.2	101.5	85.9	70.2
	57	134.0	6.8	134.0	134.0	125.4	110.4	95.4	80.4	126.3	7.9	126.3	126.3	117.8	102.2	86.5	70.9
4500	72	144.4	7.1	107.3	92.1	76.8	61.5	-	-	136.6	8.2	107.8	91.5	75.2	59.0	-	-
	67	137.4	7.0	133.0	120.4	104.1	88.8	73.5	-	128.7	8.0	126.0	115.6	99.3	83.1	66.8	-
	62	128.0	7.0	128.0	128.0	123.0	107.8	92.5	77.2	120.0	8.0	120.0	120.0	117.1	100.8	84.6	68.3
	57	130.4	6.9	130.4	130.4	126.0	110.7	95.5	80.2	123.3	7.9	123.3	123.3	119.0	102.8	86.5	70.2
5000	72	140.3	7.2	109.0	93.4	77.8	62.3	-	-	133.2	8.3	112.1	95.3	78.4	61.5	-	-
	67	133.5	7.1	133.5	123.4	105.7	90.1	74.5	-	125.5	8.1	125.5	120.4	103.5	86.6	69.8	-
	62	124.4	7.0	124.4	124.4	124.4	108.8	93.2	77.6	117.0	8.0	117.0	117.0	117.0	100.2	83.3	66.4
	57	126.7	7.0	126.7	126.7	126.7	111.1	95.5	79.9	120.2	8.0	120.2	120.2	120.2	103.3	86.4	69.6
		95°F								105°F							
2500	77	130.2	9.3	62.5	51.8	41.1	-	-	-	119.6	10.6	53.1	45.8	35.3	-	-	-
	72	121.9	9.1	78.8	68.1	57.4	46.7	-	-	112.1	10.4	73.0	62.4	51.9	41.3	-	-
	67	113.6	8.9	95.1	84.4	73.7	63.0	52.2	-	104.5	10.2	92.9	79.0	68.5	57.9	47.4	-
	62	106.1	8.9	106.1	106.1	94.4	83.7	73.0	62.3	97.9	10.1	97.9	97.9	84.3	73.7	63.2	52.6
3000	77	133.6	9.4	68.9	56.3	43.7	-	-	-	122.6	10.6	63.1	50.6	38.0	-	-	-
	72	125.1	9.2	86.2	73.6	61.1	48.5	-	-	114.9	10.4	81.1	68.5	56.0	43.5	-	-
	67	116.5	9.0	103.6	91.0	78.4	65.8	53.3	-	107.1	10.2	99.0	86.5	73.9	61.4	48.9	-
	62	108.8	8.9	108.8	108.8	100.5	87.9	75.3	62.8	100.3	10.1	100.3	100.3	91.0	78.4	65.9	53.3
	57	112.8	8.9	112.8	110.9	98.4	85.8	73.2	60.6	105.1	10.2	105.1	101.5	88.9	76.4	63.8	51.3
3500	77	137.0	9.4	75.2	60.8	46.4	-	-	-	125.6	10.6	73.2	55.4	40.8	-	-	-
	72	128.2	9.2	93.6	79.2	64.8	50.3	-	-	117.7	10.4	89.2	74.7	60.1	45.6	-	-
	67	119.4	9.0	112.0	97.6	83.1	68.7	54.3	-	109.7	10.2	105.2	94.0	79.4	64.9	50.4	-
	62	111.6	8.9	111.6	111.6	106.6	92.1	77.7	63.3	102.8	10.1	102.8	102.8	97.7	83.1	68.6	54.0
	57	115.7	8.9	115.7	114.7	104.3	89.9	75.4	61.0	107.7	10.2	107.7	105.9	95.5	80.9	66.4	51.9
4000	77	140.4	9.4	81.6	65.3	49.0	-	-	-	128.6	10.6	83.3	60.1	43.6	-	-	-
	72	131.4	9.2	101.0	84.7	68.4	52.2	-	-	120.5	10.4	97.3	80.8	64.3	47.7	-	-
	67	122.4	9.0	120.5	104.2	87.9	71.6	55.3	-	112.4	10.2	111.4	101.5	84.9	68.4	51.8	-
	62	114.3	9.0	114.3	114.3	112.6	96.3	80.0	63.8	105.2	10.2	105.2	105.2	104.3	87.8	71.3	54.7
	57	118.5	8.9	118.5	118.5	110.3	94.0	77.7	61.4	110.2	10.2	110.2	110.2	102.0	85.5	68.9	52.4
4500	72	128.7	9.3	108.2	90.9	73.7	56.5	-	-	117.9	10.5	103.1	85.7	68.4	51.0	-	-
	67	119.9	9.0	118.9	110.8	94.6	77.4	60.1	-	110.0	10.3	109.5	104.5	90.3	73.0	55.7	-
	62	112.0	9.0	112.0	112.0	111.2	93.9	76.7	59.5	103.0	10.2	103.0	103.0	102.5	85.2	67.8	50.5
	57	116.1	8.9	116.1	116.1	112.0	94.8	77.5	60.3	107.9	10.2	107.9	107.9	103.8	86.4	69.1	51.8
5000	72	126.1	9.3	115.3	97.1	78.9	60.8	-	-	115.3	10.5	108.8	90.6	72.5	54.4	-	-
	67	117.4	9.1	117.4	117.4	101.3	83.2	65.0	-	107.5	10.3	107.5	107.5	95.7	77.6	59.5	-
	62	109.7	9.0	109.7	109.7	109.7	91.5	73.3	55.2	100.7	10.2	100.7	100.7	100.7	82.6	64.4	46.3
	57	113.7	9.0	113.7	113.7	113.7	95.6	77.4	59.2	105.5	10.2	105.5	105.5	105.5	87.4	69.2	51.1

XP120 (10 Ton) (Continued)

Air on Evaporator Coil		Temperature of Air on Condenser Coil															
CFM	WB (°F)	Total Capacity ¹ (MBh)	Total Input (kW) ²	Sensible Capacity (MBh)						Total Capacity ¹ (MBh)	Total Input (kW) ²	Sensible Capacity (MBh)					
				Return Dry Bulb (°F)								Return Dry Bulb (°F)					
				90	85	80	75	70	65			90	85	80	75	70	65
		115°F										125°F					
2500	77	109.0	11.8	43.6	39.8	29.5	-	-	-	98.4	13.1	36.1	32.0	23.6	-	-	-
	72	102.2	11.6	67.1	56.7	46.4	36.0	-	-	92.4	12.9	61.3	51.1	40.8	30.6	-	-
	67	95.4	11.5	90.6	73.6	63.3	52.9	42.5	-	86.4	12.7	86.4	68.3	58.0	47.8	37.6	-
	62	89.6	11.3	89.6	89.6	74.2	63.8	53.4	43.0	81.4	12.6	81.4	81.4	64.0	53.8	43.6	33.4
3000	77	111.7	11.8	57.4	44.9	32.4	-	-	-	100.7	13.1	53.3	39.2	26.7	-	-	-
	72	104.7	11.6	76.0	63.4	50.9	38.4	-	-	94.5	12.9	70.8	58.3	45.9	33.4	-	-
	67	97.7	11.5	94.5	82.0	69.5	57.0	44.5	-	88.4	12.7	88.4	77.5	65.0	52.5	40.1	-
	62	91.8	11.3	91.8	91.8	81.5	68.9	56.4	43.9	83.2	12.6	83.2	83.2	71.9	59.5	47.0	34.5
	57	97.4	11.4	97.4	92.0	79.5	67.0	54.5	42.0	89.6	12.7	89.6	82.6	70.1	57.6	45.1	32.6
3500	77	114.3	11.8	71.2	49.9	35.3	-	-	-	102.9	13.0	70.5	46.3	29.7	-	-	-
	72	107.1	11.6	84.8	70.1	55.5	40.8	-	-	96.6	12.9	80.4	65.6	50.9	36.1	-	-
	67	100.0	11.4	98.4	90.4	75.7	61.1	46.4	-	90.3	12.7	90.3	86.8	72.0	57.3	42.5	-
	62	93.9	11.3	93.9	93.9	88.8	74.1	59.5	44.8	85.1	12.5	85.1	85.1	79.9	65.1	50.4	35.6
	57	99.6	11.4	99.6	97.0	86.6	72.0	57.3	42.7	91.6	12.7	91.6	88.1	77.8	63.1	48.3	33.5
4000	77	116.9	11.8	85.0	55.0	38.2	-	-	-	105.2	13.0	87.6	53.5	32.7	-	-	-
	72	109.6	11.6	93.6	76.8	60.1	43.3	-	-	98.7	12.8	89.9	72.9	55.9	38.8	-	-
	67	102.3	11.4	102.3	98.7	82.0	65.2	48.4	-	92.3	12.7	92.3	92.3	79.0	62.0	44.9	-
	62	96.1	11.3	96.1	96.1	96.1	79.3	62.5	45.7	86.9	12.5	86.9	86.9	86.9	70.8	53.7	36.7
	57	101.9	11.4	101.9	101.9	93.8	77.0	60.2	43.4	93.6	12.7	93.6	93.6	85.5	68.5	51.5	34.4
4500	72	107.1	11.7	97.9	80.5	63.1	45.6	-	-	96.3	12.9	92.8	75.3	57.7	40.2	-	-
	67	100.0	11.5	100.0	98.2	86.0	68.6	51.2	-	90.0	12.7	90.0	90.0	81.8	64.2	46.7	-
	62	93.9	11.4	93.9	93.9	93.9	76.4	59.0	41.6	84.8	12.6	84.8	84.8	84.8	67.7	50.2	32.6
	57	99.6	11.5	99.6	99.6	95.5	78.1	60.6	43.2	91.3	12.8	91.3	91.3	87.3	69.8	52.2	34.7
5000	72	104.6	11.7	102.3	84.2	66.1	48.0	-	-	93.9	13.0	93.9	77.7	59.6	41.6	-	-
	67	97.7	11.5	97.7	97.7	90.1	72.0	53.9	-	87.8	12.8	87.8	87.8	84.5	66.5	48.4	-
	62	91.7	11.4	91.7	91.7	91.7	73.6	55.5	37.4	82.7	12.6	82.7	82.7	82.7	64.6	46.6	28.5
	57	97.3	11.5	97.3	97.3	97.3	79.2	61.1	43.0	89.1	12.8	89.1	89.1	89.1	71.0	52.9	34.9

1. These capacities are gross ratings. For net capacity, deduct air blower motor, MBh = 3.415 x kW. Refer to the appropriate Blower Performance Table for the kW of the supply air blower motor.
2. These ratings include the condenser fan motors (total 1 kW) and the compressor motors but not the supply air blower motor.

XP150 (12.5 Ton)

Air on Evaporator Coil		Temperature of Air on Condenser Coil																			
CFM	WB (°F)	Total Capacity ¹ (MBh)	Total Input (kW) ²	Sensible Capacity (MBh)						Total Capacity ¹ (MBh)	Total Input (kW) ²	Sensible Capacity (MBh)									
				Return Dry Bulb (°F)								Return Dry Bulb (°F)									
				90	85	80	75	70	65			90	85	80	75	70	65				
		75°F										85°F									
3125	77	163.7	9.7	70.7	58.2	45.7	-	-	-	159.4	10.6	67.4	54.7	42.0	-	-	-				
	72	158.9	9.5	95.0	82.6	70.1	57.6	-	-	153.7	10.5	92.3	79.6	67.0	54.3	-	-				
	67	154.2	9.4	119.4	106.9	94.4	81.9	69.4	-	148.0	10.4	117.2	104.6	91.9	79.2	66.5	-				
	62	145.0	9.3	145.0	137.7	121.3	108.8	96.4	83.9	139.1	10.3	139.1	134.5	116.3	103.6	90.9	78.2				
3750	77	169.7	9.7	77.1	63.4	49.7	-	-	-	165.0	10.7	74.2	60.0	45.8	-	-	-				
	72	164.7	9.5	103.5	89.8	76.1	62.3	-	-	159.1	10.6	101.3	87.2	73.0	58.9	-	-				
	67	159.8	9.4	129.9	116.2	102.4	88.7	75.0	-	153.2	10.5	128.5	114.4	100.2	86.0	71.9	-				
	62	150.3	9.3	150.3	145.4	131.7	118.0	104.2	90.5	144.0	10.3	144.0	140.9	126.8	112.6	98.5	84.3				
	57	147.7	9.4	147.7	147.7	135.9	122.2	108.4	94.7	141.5	10.4	141.5	141.5	128.9	114.7	100.5	86.4				
4375	77	175.7	9.7	83.5	68.5	53.6	-	-	-	170.6	10.7	80.9	65.3	49.6	-	-	-				
	72	170.5	9.5	112.0	97.0	82.0	67.1	-	-	164.5	10.6	110.4	94.7	79.1	63.4	-	-				
	67	165.4	9.4	140.4	125.5	110.5	95.5	80.6	-	158.4	10.5	139.8	124.2	108.5	92.9	77.2	-				
	62	155.6	9.3	155.6	153.2	142.1	127.1	112.1	97.2	148.9	10.4	148.9	147.4	137.3	121.7	106.0	90.4				
	57	152.9	9.4	152.9	152.9	146.6	131.6	116.7	101.7	146.3	10.4	146.3	146.3	139.6	123.9	108.3	92.6				
5000	77	181.6	9.7	89.9	73.7	57.5	-	-	-	176.2	10.7	87.7	70.6	53.4	-	-	-				
	72	176.3	9.5	120.4	104.2	88.0	71.8	-	-	169.9	10.6	119.4	102.3	85.1	68.0	-	-				
	67	171.0	9.4	150.9	134.7	118.5	102.3	86.1	-	163.6	10.5	151.1	134.0	116.8	99.7	82.6	-				
	62	160.9	9.3	160.9	160.9	152.4	136.2	120.0	103.8	153.8	10.4	153.8	153.8	147.8	130.7	113.6	96.4				
	57	158.1	9.4	158.1	158.1	157.3	141.1	124.9	108.7	151.2	10.4	151.2	151.2	150.3	133.1	116.0	98.9				
5625	72	180.7	9.6	125.2	108.5	91.8	75.2	-	-	174.2	10.6	125.1	107.3	89.6	71.8	-	-				
	67	175.3	9.5	159.2	140.3	123.6	107.0	90.3	-	167.7	10.6	158.4	140.7	122.9	105.2	87.4	-				
	62	164.9	9.4	164.9	164.9	160.6	144.0	127.3	110.6	157.7	10.4	157.7	157.7	154.7	136.9	119.2	101.4				
	57	162.0	9.4	162.0	162.0	161.6	145.0	128.3	111.6	154.9	10.5	154.9	154.9	154.5	136.7	119.0	101.2				
6250	72	185.0	9.6	129.9	112.8	95.7	78.5	-	-	178.4	10.7	130.7	112.4	94.0	75.7	-	-				
	67	179.5	9.5	167.4	145.8	128.7	111.6	94.5	-	171.8	10.6	165.8	147.4	129.0	110.7	92.3	-				
	62	168.8	9.4	168.8	168.8	168.8	151.7	134.6	117.5	161.5	10.4	161.5	161.5	161.5	143.2	124.8	106.4				
	57	165.9	9.4	165.9	165.9	165.9	148.8	131.7	114.6	158.7	10.5	158.7	158.7	158.7	140.3	122.0	103.6				
		95°F										105°F									
3125	77	155.1	11.6	64.1	51.2	38.3	-	-	-	147.3	13.0	58.0	47.7	34.5	-	-	-				
	72	148.5	11.5	89.6	76.7	63.8	51.0	-	-	140.1	12.9	86.8	73.7	60.6	47.5	-	-				
	67	141.8	11.4	115.1	102.2	89.4	76.5	63.6	-	133.0	12.8	115.6	99.8	86.7	73.6	60.5	-				
	62	133.3	11.3	133.3	131.3	111.2	98.3	85.4	72.6	126.1	12.6	126.1	124.4	104.1	91.0	77.9	64.8				
3750	77	160.4	11.6	71.2	56.6	42.0	-	-	-	152.0	13.0	67.7	52.8	37.8	-	-	-				
	72	153.5	11.6	99.2	84.6	70.0	55.4	-	-	144.6	12.9	96.2	81.3	66.4	51.5	-	-				
	67	146.6	11.5	127.1	112.5	97.9	83.3	68.7	-	137.2	12.8	124.8	109.9	95.0	80.1	65.2	-				
	62	137.8	11.3	137.8	136.5	121.9	107.3	92.7	78.1	130.1	12.7	130.1	129.0	114.1	99.1	84.2	69.3				
	57	135.3	11.4	135.3	135.3	121.8	107.2	92.6	78.0	128.0	12.7	128.0	128.0	114.9	100.0	85.1	70.2				
4375	77	165.6	11.7	78.4	62.0	45.7	-	-	-	156.7	13.1	77.3	57.9	41.2	-	-	-				
	72	158.5	11.7	108.8	92.4	76.1	59.8	-	-	149.0	13.0	105.7	88.9	72.2	55.5	-	-				
	67	151.4	11.6	139.2	122.9	106.5	90.2	73.9	-	141.4	12.9	134.0	120.0	103.3	86.5	69.8	-				
	62	142.3	11.4	142.3	141.6	132.6	116.2	99.9	83.6	134.1	12.7	134.1	133.5	124.0	107.3	90.6	73.8				
	57	139.8	11.5	139.8	139.8	132.5	116.2	99.8	83.5	131.9	12.8	131.9	131.9	125.0	108.2	91.5	74.8				
5000	77	170.8	11.8	85.5	67.4	49.4	-	-	-	161.3	13.1	86.9	63.0	44.5	-	-	-				
	72	163.5	11.7	118.4	100.3	82.3	64.2	-	-	153.5	13.0	115.1	96.5	78.0	59.5	-	-				
	67	156.2	11.7	151.3	133.2	115.1	97.1	79.0	-	145.7	12.9	143.2	130.1	111.5	93.0	74.5	-				
	62	146.8	11.5	146.8	146.8	143.3	125.2	107.1	89.0	138.1	12.8	138.1	138.1	134.0	115.4	96.9	78.4				
	57	144.2	11.5	144.2	144.2	143.2	125.1	107.1	89.0	135.9	12.8	135.9	135.9	135.0	116.5	97.9	79.4				
5625	72	167.7	11.7	125.0	106.2	87.3	68.5	-	-	157.5	13.0	122.1	102.6	83.1	63.5	-	-				
	67	160.2	11.6	157.7	141.1	122.2	103.4	84.6	-	149.5	12.9	148.3	137.9	118.8	99.3	79.8	-				
	62	150.5	11.5	150.5	150.5	148.7	129.9	111.1	92.2	141.7	12.8	141.7	141.7	139.7	120.1	100.6	81.1				
	57	147.9	11.5	147.9	147.9	147.3	128.5	109.7	90.8	139.4	12.8	139.4	139.4	139.0	119.5	100.0	80.5				
6250	72	171.8	11.7	131.6	112.0	92.4	72.8	-	-	161.6	13.0	129.1	108.6	88.1	67.6	-	-				
	67	164.1	11.6	164.1	148.9	129.3	109.7	90.1	-	153.3	12.9	153.3	145.7	126.0	105.5	85.1	-				
	62	154.2	11.5	154.2	154.2	154.2	134.6	115.0	95.4	145.4	12.8	145.4	145.4	145.4	124.9	104.4	83.9				
	57	151.5	11.5	151.5	151.5	151.5	131.9	112.3	92.7	143.0	12.8	143.0	143.0	143.0	122.5	102.1	81.6				

XP150 (12.5 Ton) (Continued)

Air on Evaporator Coil		Temperature of Air on Condenser Coil																	
CFM	WB (°F)	Total Capacity ¹ (MBh)	Total Input (kW) ²	Sensible Capacity (MBh)						Total Capacity ¹ (MBh)	Total Input (kW) ²	Sensible Capacity (MBh)							
				Return Dry Bulb (°F)								Return Dry Bulb (°F)							
				90	85	80	75	70	65			90	85	80	75	70	65		
		115°F										125°F							
3125	77	139.5	14.4	52.0	44.1	30.8	-	-	-	131.7	15.8	47.4	40.6	27.0	-	-	-		
	72	131.8	14.2	84.1	70.7	57.4	44.1	-	-	123.5	15.6	81.4	67.8	54.2	40.6	-	-		
	67	124.1	14.1	116.1	97.4	84.0	70.7	57.4	-	115.3	15.4	115.3	95.0	81.4	67.8	54.2	-		
	62	118.9	14.0	118.9	117.5	97.0	83.7	70.3	57.0	111.7	15.4	111.7	110.5	89.9	76.4	62.8	49.2		
3750	77	143.6	14.4	64.1	48.9	33.7	-	-	-	135.2	15.8	62.4	45.1	29.5	-	-	-		
	72	135.7	14.3	93.3	78.1	62.9	47.6	-	-	126.8	15.6	90.4	74.8	59.3	43.7	-	-		
	67	127.8	14.1	122.5	107.2	92.0	76.8	61.6	-	118.4	15.4	118.4	104.6	89.1	73.5	58.0	-		
	62	122.4	14.0	122.4	121.5	106.2	91.0	75.8	60.6	114.7	15.4	114.7	114.0	98.4	82.9	67.3	51.8		
	57	120.6	14.1	120.6	120.6	108.1	92.8	77.6	62.4	113.3	15.4	113.3	113.3	101.2	85.6	70.1	54.6		
4375	77	147.7	14.5	76.2	53.7	36.6	-	-	-	138.8	15.8	77.3	49.6	32.1	-	-	-		
	72	139.6	14.3	102.5	85.4	68.3	51.2	-	-	130.1	15.6	99.4	81.9	64.4	46.9	-	-		
	67	131.5	14.1	128.8	117.1	100.0	82.9	65.8	-	121.5	15.4	121.5	114.2	96.7	79.2	61.7	-		
	62	125.9	14.1	125.9	125.4	115.4	98.3	81.2	64.1	117.8	15.4	117.8	117.4	106.9	89.4	71.9	54.4		
	57	124.1	14.1	124.1	124.1	117.4	100.3	83.2	66.1	116.3	15.4	116.3	116.3	109.9	92.4	74.9	57.4		
5000	77	151.8	14.5	88.3	58.5	39.5	-	-	-	142.3	15.9	92.2	54.1	34.6	-	-	-		
	72	143.5	14.3	111.7	92.7	73.7	54.8	-	-	133.5	15.6	108.4	89.0	69.5	50.0	-	-		
	67	135.1	14.2	135.1	127.0	108.0	89.0	70.0	-	124.6	15.4	124.6	123.8	104.4	84.9	65.5	-		
	62	129.4	14.1	129.4	129.4	124.6	105.7	86.7	67.7	120.8	15.4	120.8	120.8	115.3	95.9	76.4	57.0		
	57	127.6	14.1	127.6	127.6	126.8	107.8	88.8	69.8	119.2	15.4	119.2	119.2	118.6	99.1	79.7	60.2		
5625	72	147.4	14.4	119.1	98.9	78.8	58.6	-	-	137.3	15.7	116.2	95.3	74.5	53.7	-	-		
	67	138.8	14.2	138.8	134.7	115.3	95.2	75.0	-	128.1	15.5	128.1	128.1	111.9	91.0	70.2	-		
	62	133.0	14.1	133.0	133.0	130.6	110.4	90.2	70.1	124.2	15.5	124.2	124.2	121.5	100.7	79.8	59.0		
	57	131.0	14.1	131.0	131.0	130.7	110.5	90.3	70.1	122.6	15.5	122.6	122.6	122.3	101.5	80.6	59.8		
6250	72	151.3	14.4	126.5	105.2	83.8	62.5	-	-	141.1	15.7	123.9	101.7	79.5	57.3	-	-		
	67	142.5	14.2	142.5	142.5	122.7	101.3	80.0	-	131.7	15.5	131.7	131.7	119.4	97.2	74.9	-		
	62	136.5	14.2	136.5	136.5	136.5	115.2	93.8	72.5	127.6	15.5	127.6	127.6	127.6	105.4	83.2	61.0		
	57	134.5	14.2	134.5	134.5	134.5	113.2	91.8	70.5	126.0	15.5	126.0	126.0	126.0	103.8	81.6	59.4		

1. These capacities are gross ratings. For net capacity, deduct air blower motor, MBh = 3.415 x kW. Refer to the appropriate Blower Performance Table for the kW of the supply air blower motor.
2. These ratings include the condenser fan motors (total 1 kW) and the compressor motors but not the supply air blower motor.

XP078-150 Heating Capacities

XP078-150

Size (Tons)	Model	Air Over Evaporator Coil		Capacity ¹ & kW	Outdoor Temperature (°F @ 72% RH)							
		CFM	DB (°F)		-10	0	10	20	30	40	50	60
078 (6.5)	XP	1950	55	MBH	10.1	21.7	33.3	44.8	56.4	68.0	79.5	91.1
				kW	4.10	4.30	4.50	4.70	4.89	5.09	5.29	5.49
			70	MBH	4.8	16.4	28.0	39.5	51.1	62.7	74.2	85.8
				kW	4.95	5.15	5.35	5.55	5.75	5.94	6.14	6.34
			80	MBH	0.9	12.5	24.1	35.7	47.2	58.8	70.4	81.9
				kW	5.54	5.74	5.94	6.14	6.33	6.53	6.73	6.93
		2600	55	MBH	13.4	25.0	36.6	48.1	59.7	71.3	82.8	94.4
				kW	3.63	3.83	4.03	4.22	4.42	4.62	4.82	5.02
			70	MBH	8.0	19.6	31.2	42.7	54.3	65.9	77.4	89.0
				kW	4.45	4.65	4.85	5.05	5.24	5.44	5.64	5.84
			80	MBH	4.3	15.8	27.4	39.0	50.5	62.1	73.7	85.2
				kW	5.07	5.27	5.47	5.67	5.86	6.06	6.26	6.46
		3250	55	MBH	13.8	25.3	36.9	48.5	60.0	71.6	83.2	94.7
				kW	3.25	3.45	3.65	3.85	4.05	4.24	4.44	4.64
			70	MBH	8.5	20.0	31.6	43.2	54.7	66.3	77.9	89.5
				kW	4.11	4.30	4.50	4.70	4.90	5.10	5.29	5.49
			80	MBH	4.6	16.2	27.7	39.3	50.9	62.4	74.0	85.6
				kW	4.69	4.89	5.09	5.29	5.48	5.68	5.88	6.08
090 (7.5)	XP	2250	55	MBH	17.4	29.3	41.1	53.0	64.9	76.7	88.6	100.5
				KW	5.0	5.2	5.4	5.6	5.9	6.1	6.3	6.5
			70	MBH	15.4	27.3	39.1	51.0	62.8	74.7	86.6	98.4
				KW	6.1	6.3	6.5	6.7	6.9	7.1	7.4	7.6
			80	MBH	13.0	24.9	36.7	48.6	60.4	72.3	84.2	96.0
				KW	6.9	7.1	7.3	7.5	7.7	7.9	8.1	8.4
		3000	55	MBH	20.1	32.0	43.8	55.7	67.6	79.4	91.3	103.2
				KW	4.4	4.6	4.9	5.1	5.3	5.5	5.7	5.9
			70	MBH	18.0	29.9	41.8	53.6	65.5	77.3	89.2	101.1
				KW	5.5	5.7	5.9	6.1	6.3	6.6	6.8	7.0
			80	MBH	15.9	27.7	39.6	51.5	63.3	75.2	87.1	98.9
				KW	6.4	6.6	6.8	7.0	7.2	7.4	7.6	7.8
		3750	55	MBH	21.2	33.0	44.9	56.7	68.6	80.5	92.3	104.2
				KW	4.0	4.2	4.4	4.6	4.8	5.1	5.3	5.5
			70	MBH	19.1	31.0	42.9	54.7	66.6	78.5	90.3	102.2
				KW	5.1	5.3	5.5	5.7	5.9	6.1	6.3	6.6
			80	MBH	16.7	28.6	40.5	52.3	64.2	76.1	87.9	99.8
				KW	5.9	6.1	6.3	6.5	6.7	6.9	7.1	7.3
102 (8.5)	XP	2550	55	MBH	9.4	22.3	35.1	48.0	60.8	73.7	86.5	99.4
				KW	4.9	5.1	5.3	5.5	5.7	5.9	6.1	6.3
			70	MBH	12.2	25.1	37.9	50.8	63.7	76.5	89.4	102.2
				KW	6.1	6.3	6.5	6.7	6.9	7.1	7.3	7.5
			80	MBH	11.1	24.0	36.8	49.7	62.5	75.4	88.2	101.1
				KW	6.9	7.1	7.3	7.5	7.7	7.9	8.2	8.4
		3400	55	MBH	14.9	27.8	40.6	53.5	66.3	79.2	92.0	104.9
				KW	4.3	4.5	4.7	4.9	5.2	5.4	5.6	5.8
			70	MBH	17.7	30.6	43.4	56.3	69.1	82.0	94.8	107.7
				KW	5.6	5.8	6.0	6.2	6.4	6.6	6.8	7.0
			80	MBH	16.6	29.4	42.3	55.1	68.0	80.8	93.7	106.6
				KW	6.4	6.6	6.8	7.0	7.2	7.4	7.6	7.8
		4250	55	MBH	17.2	30.1	42.9	55.8	68.6	81.5	94.3	107.2
				KW	4.0	4.2	4.4	4.6	4.8	5.0	5.2	5.4
			70	MBH	20.0	32.9	45.7	58.6	71.4	84.3	97.1	110.0
				KW	5.2	5.4	5.6	5.9	6.1	6.3	6.5	6.7
			80	MBH	18.9	31.8	44.6	57.5	70.3	83.2	96.0	108.9
				KW	6.1	6.3	6.5	6.7	6.9	7.1	7.3	7.5

XP078-150 (Continued)

Size (Tons)	Model	Air Over Evaporator Coil		Capacity ¹ & kW	Outdoor Temperature (°F @ 72% RH)							
		CFM	DB (°F)		-10	0	10	20	30	40	50	60
120 (10)	XP	3000	55	MBH	51.3	63.5	75.7	87.9	100.1	112.3	124.5	136.7
				kW	5.35	5.59	5.83	6.07	6.31	6.55	6.79	7.03
			70	MBH	40.6	52.8	65.0	77.2	89.4	101.6	113.8	126.1
				kW	6.49	6.73	6.97	7.21	7.45	7.69	7.93	8.17
			80	MBH	37.7	50.0	62.2	74.4	86.6	98.8	111.0	123.2
				kW	7.24	7.48	7.72	7.96	8.20	8.44	8.68	8.92
		4000	55	MBH	52.4	64.6	76.8	89.1	101.3	113.5	125.7	137.9
				kW	4.68	4.92	5.16	5.40	5.65	5.89	6.13	6.37
			70	MBH	41.8	54.0	66.2	78.4	90.6	102.8	115.0	127.2
				kW	5.83	6.07	6.31	6.55	6.79	7.03	7.27	7.51
			80	MBH	39.0	51.2	63.4	75.6	87.8	100.0	112.2	124.4
				kW	6.59	6.83	7.07	7.31	7.55	7.79	8.03	8.28
		5000	55	MBH	52.1	64.4	76.6	88.8	101.0	113.2	125.4	137.6
				kW	3.49	3.73	3.97	4.21	4.45	4.70	4.94	5.18
			70	MBH	41.5	53.7	65.9	78.1	90.3	102.5	114.7	126.9
				kW	4.63	4.87	5.11	5.35	5.59	5.84	6.08	6.32
			80	MBH	38.6	50.8	63.0	75.2	87.4	99.6	111.8	124.0
				kW	5.38	5.62	5.86	6.11	6.35	6.59	6.83	7.07
150 (12.5)	XP	3750	55	MBH	26.2	45.3	64.5	83.6	102.7	121.9	141.0	160.1
				KW	8.0	8.4	8.8	9.2	9.6	10.0	10.4	10.8
			70	MBH	22.8	41.9	61.0	80.2	99.3	118.4	137.6	156.7
				KW	9.5	9.9	10.3	10.7	11.1	11.5	11.9	12.3
			80	MBH	19.5	38.7	57.8	76.9	96.1	115.2	134.3	153.5
				KW	10.7	11.1	11.5	11.9	12.3	12.7	13.1	13.5
		5000	55	MBH	34.3	53.4	72.6	91.7	110.8	130.0	149.1	168.2
				KW	7.2	7.6	8.0	8.4	8.8	9.2	9.6	10.0
			70	MBH	30.9	50.1	69.2	88.3	107.5	126.6	145.7	164.8
				KW	8.7	9.1	9.5	9.9	10.3	10.7	11.1	11.5
			80	MBH	27.6	46.7	65.8	85.0	104.1	123.2	142.4	161.5
				KW	9.9	10.3	10.7	11.1	11.5	11.9	12.3	12.7
		6250	55	MBH	36.3	55.5	74.6	93.7	112.8	132.0	151.1	170.2
				KW	6.8	7.2	7.6	8.0	8.4	8.8	9.2	9.6
			70	MBH	32.9	52.0	71.1	90.3	109.4	128.5	147.7	166.8
				KW	8.3	8.7	9.1	9.5	9.9	10.3	10.7	11.1
			80	MBH	29.6	48.8	67.9	87.0	106.2	125.3	144.4	163.6
				KW	9.5	9.9	10.3	10.7	11.1	11.5	11.9	12.3

1. These capacities do not include the supply air blower motor heat. For net capacity, add motor heat, MBh = 3.415 x kW.

Airflow Performance

XP078-150 Side Duct Application

XP078 (6.5 Ton) Side Duct

Air Flow (CFM)	Available External Static Pressure - IWG ¹																			
	0.2		0.4		0.6		0.8		1.0		1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	FS ⁴				Standard 1.5 HP & Drive						Hi Static 2 HP & Drive									
1800	441	0.44	552	0.54	639	0.63	719	0.72	785	0.81	859	0.99	920	1.16	966	1.25	1018	1.35	1066	1.43
2000	470	0.48	571	0.59	654	0.69	730	0.79	795	0.89	870	1.09	932	1.25	978	1.35	1030	1.44	1078	1.53
2200	500	0.54	591	0.66	669	0.76	743	0.87	806	0.97	882	1.18	944	1.35	990	1.44	1042	1.54	1090	1.62
2400	529	0.60	612	0.73	686	0.85	756	0.96	819	1.07	894	1.29	956	1.45	1002	1.55	1054	1.64	1102	1.73
2600	558	0.68	635	0.82	705	0.94	771	1.05	832	1.17	906	1.40	968	1.56	1014	1.66	1066	1.75	1114	1.84
2800	587	0.78	658	0.92	725	1.04	788	1.16	847	1.29	918	1.51	980	1.68	1026	1.77	1078	1.87	1126	1.95
3000	616	0.88	683	1.02	746	1.15	806	1.28	863	1.41	931	1.63	992	1.80	1038	1.89	1090	1.99	1138	2.07
3200	645	1.00	710	1.14	768	1.27	825	1.41	879	1.55	943	1.76	1005	1.92	1051	2.02	1103	2.12	1151	2.20
3400	674	1.14	737	1.27	792	1.40	846	1.55	897	1.70	956	1.89	1018	2.06	1064	2.15	1116	2.25	-	-
	FS ⁴																			

1. Blower performance includes gas heat exchangers and 2" filters. See STATIC RESISTANCE table for additional applications.
2. See RPM SELECTION table to determine desired motor sheave setting and to determine the maximum continuous BHP.
3. kW = BHP x .932.
4. Field Supplied Drive.

XP090 (7.5 Ton) Side Duct

Air Flow (CFM)	Available External Static Pressure - IWG ¹																			
	0.2		0.4		0.6		0.8		1.0		1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	1.5 HP & Field Supplied Drive				Standard 1.5 HP & Drive										Hi Static 3 HP & Drive					
2000	779	0.37	840	0.58	898	0.76	955	0.92	1010	1.07	1065	1.21	1120	1.34	1176	1.46	1233	1.59	1292	1.72
2200	809	0.52	870	0.73	928	0.91	985	1.07	1040	1.22	1095	1.36	1150	1.48	1206	1.61	1263	1.74	1321	1.87
2400	842	0.69	903	0.90	961	1.08	1018	1.24	1073	1.39	1128	1.52	1183	1.65	1239	1.78	1296	1.91	1355	2.04
2600	879	0.87	939	1.08	998	1.26	1054	1.42	1110	1.57	1165	1.71	1220	1.84	1275	1.96	1332	2.09	1391	2.22
2800	918	1.08	979	1.28	1037	1.46	1093	1.63	1149	1.77	1204	1.91	1259	2.04	1315	2.16	1371	2.29	1430	2.43
3000	960	1.30	1020	1.50	1079	1.68	1135	1.85	1191	1.99	1246	2.13	1301	2.26	1356	2.39	1413	2.51	1472	2.65
3200	1004	1.54	1065	1.74	1123	1.92	1179	2.09	1235	2.23	1290	2.37	1345	2.50	1400	2.62	1457	2.75	1516	2.89
3400	1050	1.79	1111	2.00	1169	2.18	1226	2.34	1281	2.49	1336	2.63	1391	2.75	1447	2.88	1504	3.01	1562	3.14
3600	1099	2.07	1159	2.27	1218	2.45	1274	2.62	1330	2.76	1385	2.90	1440	3.03	1495	3.15	1552	3.28	1611	3.42
3800	1149	2.36	1209	2.56	1268	2.74	1324	2.91	1380	3.05	1435	3.19	1490	3.32	1545	3.44	-	-	-	-
	3 HP & Field Supplied Drive																			

1. Blower performance includes 2" filters. See STATIC RESISTANCE table for additional applications.
2. See RPM SELECTION table to determine desired motor sheave setting and to determine the maximum continuous BHP.
3. kW = BHP x 0.932.

XP102 (8.5 Ton) Side Duct

Air Flow (CFM)	Available External Static Pressure - IWG ¹																			
	0.2		0.4		0.6		0.8		1.0		1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	2 HP & Field Supplied Drive				Standard 2 HP & Drive								Hi Static 3 HP & Drive							
2200	632	0.23	684	0.44	734	0.65	783	0.84	830	1.03	876	1.21	921	1.39	966	1.56	1009	1.74	1051	1.91
2400	639	0.32	691	0.53	741	0.74	790	0.93	837	1.12	883	1.30	928	1.48	972	1.65	1015	1.83	1058	2.00
2600	646	0.41	698	0.62	748	0.82	797	1.02	844	1.21	890	1.39	936	1.57	980	1.74	1023	1.92	1065	2.09
2800	654	0.50	706	0.71	756	0.92	805	1.11	852	1.30	898	1.48	943	1.66	987	1.83	1031	2.01	1073	2.18
3000	663	0.60	714	0.81	765	1.02	813	1.21	861	1.40	907	1.58	952	1.76	996	1.93	1039	2.11	1082	2.28
3200	673	0.71	724	0.93	774	1.13	823	1.32	871	1.51	917	1.69	962	1.87	1006	2.05	1049	2.22	1091	2.39
3400	684	0.84	735	1.05	785	1.25	834	1.45	882	1.63	928	1.82	973	2.00	1017	2.17	1060	2.34	1102	2.52
3600	696	0.98	747	1.19	798	1.39	846	1.59	894	1.78	940	1.96	985	2.14	1029	2.31	1072	2.48	1115	2.66
3800	709	1.14	761	1.35	811	1.55	860	1.75	907	1.93	953	2.12	999	2.29	1043	2.47	1086	2.64	1128	2.81
4000	724	1.31	776	1.52	826	1.72	874	1.92	922	2.11	968	2.29	1013	2.47	1057	2.64	1100	2.82	1143	2.99
4200	740	1.50	792	1.71	842	1.92	890	2.11	938	2.30	984	2.48	1029	2.66	1073	2.83	1116	3.01	1159	3.18
	3 HP & Field Supplied Drive																			

1. Blower performance includes 2" filters. See STATIC RESISTANCE table for additional applications.
2. See RPM SELECTION table to determine desired motor sheave setting and to determine the maximum continuous BHP.
3. kW = BHP x 0.932.

XP120 (10 Ton) Side Duct

Air Flow (CFM)	Available External Static Pressure - IWG ¹																			
	0.2		0.4		0.6		0.8		1.0		1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	2 HP & Field Supplied Drive						Standard 2 HP & Drive								Hi Static 3 HP & Drive					
2600	646	0.41	698	0.62	748	0.82	797	1.02	844	1.21	890	1.39	936	1.57	980	1.74	1023	1.92	1065	2.09
2800	654	0.50	706	0.71	756	0.92	805	1.11	852	1.30	898	1.48	943	1.66	987	1.83	1031	2.01	1073	2.18
3000	663	0.60	714	0.81	765	1.02	813	1.21	861	1.40	907	1.58	952	1.76	996	1.93	1039	2.11	1082	2.28
3200	673	0.71	724	0.93	774	1.13	823	1.32	871	1.51	917	1.69	962	1.87	1006	2.05	1049	2.22	1091	2.39
3400	684	0.84	735	1.05	785	1.25	834	1.45	882	1.63	928	1.82	973	2.00	1017	2.17	1060	2.34	1102	2.52
3600	696	0.98	747	1.19	798	1.39	846	1.59	894	1.78	940	1.96	985	2.14	1029	2.31	1072	2.48	1115	2.66
3800	709	1.14	761	1.35	811	1.55	860	1.75	907	1.93	953	2.12	999	2.29	1043	2.47	1086	2.64	1128	2.81
4000	724	1.31	776	1.52	826	1.72	874	1.92	922	2.11	968	2.29	1013	2.47	1057	2.64	1100	2.82	1143	2.99
4200	740	1.50	792	1.71	842	1.92	890	2.11	938	2.30	984	2.48	1029	2.66	1073	2.83	1116	3.01	1159	3.18
4400	757	1.71	809	1.92	859	2.13	908	2.32	955	2.51	1001	2.69	1046	2.87	1091	3.04	1134	3.22	1176	3.39
4600	776	1.94	827	2.15	877	2.35	926	2.55	974	2.74	1020	2.92	1065	3.10	1109	3.27	1152	3.45	-	-
4800	795	2.19	847	2.40	897	2.60	946	2.79	993	2.98	1040	3.16	1085	3.34	-	-	-	-	-	-
5000	816	2.45	868	2.66	918	2.86	967	3.06	1014	3.25	1061	3.43	-	-	-	-	-	-	-	-
	3 HP & Field Supplied Drive																			

1. Blower performance includes 2" filters. See STATIC RESISTANCE table for additional applications.
2. See RPM SELECTION table to determine desired motor sheave setting and to determine the maximum continuous BHP.
3. KW = BHP x 0.932.

XP150 (12.5 Ton) Side Duct

Air Flow (CFM)	Available External Static Pressure - IWG ¹																			
	0.2		0.4		0.6		0.8		1.0		1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	3 HP & Field Supplied Drive										Standard 3 HP & Drive									
3200	673	0.71	724	0.93	774	1.13	823	1.32	871	1.51	917	1.69	962	1.87	1006	2.05	1049	2.22	1091	2.39
3400	684	0.84	735	1.05	785	1.25	834	1.45	882	1.63	928	1.82	973	2.00	1017	2.17	1060	2.34	1102	2.52
3600	696	0.98	747	1.19	798	1.39	846	1.59	894	1.78	940	1.96	985	2.14	1029	2.31	1072	2.48	1115	2.66
3800	709	1.14	761	1.35	811	1.55	860	1.75	907	1.93	953	2.12	999	2.29	1043	2.47	1086	2.64	1128	2.81
4000	724	1.31	776	1.52	826	1.72	874	1.92	922	2.11	968	2.29	1013	2.47	1057	2.64	1100	2.82	1143	2.99
4200	740	1.50	792	1.71	842	1.92	890	2.11	938	2.30	984	2.48	1029	2.66	1073	2.83	1116	3.01	1159	3.18
4400	757	1.71	809	1.92	859	2.13	908	2.32	955	2.51	1001	2.69	1046	2.87	1091	3.04	1134	3.22	1176	3.39
4600	776	1.94	827	2.15	877	2.35	926	2.55	974	2.74	1020	2.92	1065	3.10	1109	3.27	1152	3.45	1194	3.62
4800	795	2.19	847	2.40	897	2.60	946	2.79	993	2.98	1040	3.16	1085	3.34	1129	3.52	1172	3.69	1214	3.86
5000	816	2.45	868	2.66	918	2.86	967	3.06	1014	3.25	1061	3.43	1106	3.61	1150	3.78	1193	3.95	1235	4.13
5200	839	2.73	890	2.94	940	3.14	989	3.34	1037	3.53	1083	3.71	1128	3.89	1172	4.06	1215	4.23	1257	4.41
5400	862	3.03	914	3.24	964	3.44	1012	3.64	1060	3.82	1106	4.01	1151	4.18	1195	4.36	1238	4.53	1281	4.70
5600	886	3.34	938	3.55	988	3.76	1037	3.95	1084	4.14	1131	4.32	1176	4.50	1220	4.67	1263	4.85	1305	5.02
5800	912	3.67	964	3.89	1014	4.09	1063	4.28	1110	4.47	1156	4.65	1201	4.83	1246	5.01	1289	5.18	1331	5.35
6000	939	4.02	990	4.23	1041	4.44	1089	4.63	1137	4.82	1183	5.00	1228	5.18	1272	5.35	1315	5.53	1358	5.70
6200	967	4.39	1018	4.60	1068	4.80	1117	4.99	1165	5.18	1211	5.36	1256	5.54	1300	5.72	-	-	-	-
	Hi Static 5 HP & Drive														5 HP & Field Supplied Drive					

1. Blower performance includes 2" filters. See STATIC RESISTANCE table for additional applications.
2. See RPM SELECTION table to determine desired motor sheave setting and to determine the maximum continuous BHP.
3. KW = BHP x 0.932.

XP078-150 Bottom Duct Application**XP078 (6.5 Ton) Bottom Duct**

Air Flow (CFM)	Available External Static Pressure - IWG ¹															
	0.2		0.4		0.6		0.8		1.0		1.2		1.4		1.6	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	FS ⁴				Standard 1.5 HP & Drive				Hi Static 2 HP & Drive							
1800	445	0.63	559	0.66	648	0.69	730	0.72	799	0.75	875	0.89	937	0.99	984	1.05
2000	486	0.71	589	0.76	674	0.79	753	0.83	820	0.87	898	1.02	960	1.13	1007	1.18
2200	530	0.84	624	0.90	705	0.94	781	0.99	846	1.03	924	1.19	988	1.31	1034	1.35
2400	567	0.91	653	0.98	729	1.04	801	1.09	867	1.14	944	1.31	1007	1.41	1055	1.47
2600	605	1.02	685	1.10	758	1.16	826	1.21	889	1.27	965	1.45	1028	1.55	1075	1.60
2800	645	1.16	719	1.24	788	1.29	854	1.36	915	1.43	988	1.60	1051	1.71	1099	1.75
3000	686	1.31	757	1.39	822	1.46	885	1.53	943	1.60	1013	1.77	1076	1.88	1123	1.93
3200	729	1.49	797	1.57	858	1.64	917	1.73	972	1.81	1038	1.96	1102	2.07	1149	2.11
3400	772	1.70	839	1.77	897	1.84	953	1.93	1005	2.03	1066	2.16	1130	2.27	1177	2.31
	FS ⁴															

1. Blower performance includes gas heat exchangers and 2" filters. See STATIC RESISTANCE table for additional applications.
2. See RPM SELECTION table to determine desired motor sheave setting and to determine the maximum continuous BHP.
3. kW = BHP x .932.
4. Field Supplied Drive.

XP090 (7.5 Ton) Bottom Duct

Air Flow (CFM)	Available External Static Pressure - IWG ¹															
	0.2		0.4		0.6		0.8		1.0		1.2		1.4		1.6	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	1.5 HP & Field Supplied Drive				Standard 1.5 HP & Drive				Hi Static 3 HP & Drive							
2000	805	0.46	879	0.68	953	0.86	1027	1.03	1101	1.19	1177	1.34	1254	1.49	1333	1.65
2200	842	0.62	916	0.84	990	1.02	1064	1.19	1138	1.35	1214	1.50	1291	1.65	1370	1.81
2400	885	0.81	959	1.02	1033	1.21	1107	1.38	1181	1.53	1257	1.68	1334	1.83	1413	1.99
2600	933	1.01	1007	1.23	1081	1.41	1155	1.58	1229	1.74	1305	1.89	1382	2.04	1461	2.20
2800	985	1.24	1059	1.46	1132	1.64	1206	1.81	1281	1.97	1356	2.12	1433	2.27	1512	2.43
3000	1040	1.49	1114	1.71	1187	1.90	1261	2.06	1336	2.22	1411	2.37	1488	2.52	1567	2.68
3200	1097	1.77	1171	1.98	1245	2.17	1319	2.34	1393	2.49	1469	2.64	1546	2.80	1625	2.96
3400	1157	2.06	1231	2.28	1305	2.47	1379	2.63	1453	2.79	1529	2.94	1606	3.09	1685	3.25
3600	1219	2.38	1293	2.60	1367	2.78	1440	2.95	1515	3.11	1590	3.26	1667	3.41	-	-
3800	1282	2.72	1356	2.93	1430	3.12	1504	3.29	1578	3.45	-	-	-	-	-	-
	3 HP & Field Supplied Drive															

1. Blower performance includes 2" filters. See STATIC RESISTANCE table for additional applications.
2. See RPM SELECTION table to determine desired motor sheave setting and to determine the maximum continuous BHP.
3. kW = BHP x 0.932.

XP102 (8.5 Ton) Bottom Duct

Air Flow (CFM)	Available External Static Pressure - IWG ¹															
	0.2		0.4		0.6		0.8		1.0		1.2		1.4		1.6	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	2 HP & Field Supplied Drive				Standard 2 HP & Drive				Hi Static 3 HP & Drive							
2200	662	0.53	717	0.68	770	0.83	821	0.96	870	1.09	918	1.22	965	1.35	1010	1.47
2400	677	0.63	732	0.78	784	0.93	835	1.06	885	1.19	933	1.32	979	1.44	1025	1.57
2600	693	0.75	748	0.90	801	1.04	852	1.18	901	1.31	949	1.44	996	1.56	1041	1.68
2800	712	0.88	767	1.03	819	1.17	871	1.31	920	1.44	968	1.57	1014	1.69	1060	1.81
3000	733	1.03	788	1.18	841	1.33	892	1.46	941	1.59	989	1.72	1036	1.84	1081	1.97
3200	757	1.20	811	1.36	864	1.50	915	1.64	964	1.77	1012	1.89	1059	2.02	1104	2.14
3400	782	1.40	837	1.55	890	1.69	941	1.83	990	1.96	1038	2.09	1085	2.21	1130	2.33
3600	810	1.61	865	1.76	918	1.91	969	2.04	1018	2.18	1066	2.30	1113	2.43	1158	2.55
3800	841	1.85	896	2.00	948	2.14	999	2.28	1049	2.41	1097	2.54	1143	2.66	1189	2.78
4000	874	2.11	928	2.26	981	2.40	1032	2.54	1082	2.67	1130	2.80	1176	2.92	1222	3.04
4200	909	2.38	963	2.53	1016	2.68	1067	2.81	1117	2.95	1164	3.07	1211	3.20	1256	3.32
	3 HP & Field Supplied Drive															

1. Blower performance includes 2" filters. See STATIC RESISTANCE table for additional applications.
2. See RPM SELECTION table to determine desired motor sheave setting and to determine the maximum continuous BHP.
3. kW = BHP x 0.932.

XP120 (10 Ton) Bottom Duct

Air Flow (CFM)	Available External Static Pressure - IWG ¹											
	0.2		0.4		0.6		0.8		1.0		1.2	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	2 HP & Field Supplied Drive				Standard 2 HP & Drive				Hi Static 3 HP & Drive			
2600	693	0.75	748	0.90	801	1.04	852	1.18	901	1.31	949	1.44
2800	712	0.88	767	1.03	819	1.17	871	1.31	920	1.44	968	1.57
3000	733	1.03	788	1.18	841	1.33	892	1.46	941	1.59	989	1.72
3200	757	1.20	811	1.36	864	1.50	915	1.64	964	1.77	1012	1.89
3400	782	1.40	837	1.55	890	1.69	941	1.83	990	1.96	1038	2.09
3600	810	1.61	865	1.76	918	1.91	969	2.04	1018	2.18	1066	2.30
3800	841	1.85	896	2.00	948	2.14	999	2.28	1049	2.41	1097	2.54
4000	874	2.11	928	2.26	981	2.40	1032	2.54	1082	2.67	1130	2.80
4200	909	2.38	963	2.53	1016	2.68	1067	2.81	1117	2.95	1164	3.07
4400	946	2.68	1000	2.83	1053	2.98	1104	3.11	1154	3.24	1202	3.37
4600	985	3.00	1040	3.15	1092	3.29	1143	3.43	-	-	-	-
4800	1026	3.33	-	-	-	-	-	-	-	-	-	-

3 HP & Field Supplied Drive

1. Blower performance includes 2" filters. See STATIC RESISTANCE table for additional applications.
2. See RPM SELECTION table to determine desired motor sheave setting and to determine the maximum continuous BHP.
3. KW = BHP x 0.932.

XP150 (12.5 Ton) Bottom Duct

Air Flow (CFM)	Available External Static Pressure - IWG ¹											
	0.2		0.4		0.6		0.8		1.0		1.2	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	3 HP & Field Supplied Drive				Standard 3 HP & Drive				Hi Static 5 HP & Drive			
3200	757	1.20	811	1.36	864	1.50	915	1.64	964	1.77	1012	1.89
3400	782	1.40	837	1.55	890	1.69	941	1.83	990	1.96	1038	2.09
3600	810	1.61	865	1.76	918	1.91	969	2.04	1018	2.18	1066	2.30
3800	841	1.85	896	2.00	948	2.14	999	2.28	1049	2.41	1097	2.54
4000	874	2.11	928	2.26	981	2.40	1032	2.54	1082	2.67	1130	2.80
4200	909	2.38	963	2.53	1016	2.68	1067	2.81	1117	2.95	1164	3.07
4400	946	2.68	1000	2.83	1053	2.98	1104	3.11	1154	3.24	1202	3.37
4600	985	3.00	1040	3.15	1092	3.29	1143	3.43	1193	3.56	1241	3.69
4800	1026	3.33	1081	3.48	1133	3.63	1184	3.76	1234	3.90	1282	4.02
5000	1069	3.69	1124	3.84	1177	3.98	1228	4.12	1277	4.25	1325	4.38
5200	1114	4.06	1169	4.21	1222	4.35	1273	4.49	1322	4.62	1370	4.75
5400	1161	4.45	1216	4.60	1268	4.74	1319	4.88	1369	5.01	1417	5.14
5600	1210	4.86	1264	5.01	1317	5.15	1368	5.29	1418	5.42	1465	5.55
5800	1260	5.28	1315	5.43	1367	5.57	1418	5.71	-	-	-	-

5 HP & Field Supplied Drive

1. Blower performance includes 2" filters. See STATIC RESISTANCE table for additional applications.
2. See RPM SELECTION table to determine desired motor sheave setting and to determine the maximum continuous BHP.
3. KW = BHP x 0.932.

RPM Selection

Size (Tons)	Model	HP	Max BHP	Motor Sheave	Blower Sheave	6 Turns Open	5 Turns Open	4 Turns Open	3 Turns Open	2 Turns Open	1 Turn Open	Fully Closed
078 (6.5)	XP	1.5	1.73	VL40	AK84	NA	576	618	661	702	748	792
		2.0	2.30	VL44	AK71	NA	790	843	887	936	989	1041
090 (7.5)	XP	1.5	1.73	1VM50	AK74	N/A	897	945	991	1035	1079	1126
		3	3.45	1VM50	AK61	N/A	1088	1147	1205	1265	1312	1365
102 (8.5)	XP	2	2.30	1VM50	AK89	N/A	735	775	815	851	889	930
		3	3.45	1VM50	AK74	N/A	880	928	972	1016	1067	1110
120 (10)	XP	2	2.30	1VM50	AK84	N/A	785	821	858	901	940	980
		3	3.45	1VM50	AK74	N/A	880	928	972	1016	1067	1110
150 (12.5)	XP	3	3.45	1VM50	AK74	N/A	880	928	972	1016	1067	1110
		5	5.75	1VP56	BK77	1052	1095	1136	1175	1216	1272	N/A

Additional Static Resistance

Size (Tons)	Model	CFM	Economizer ^{1 2}	4" Filter ¹	Electric Heat kW ¹				
					9	18	24	36	54
090 (7.5)	XP	1900	0.07	0.10	0.05	0.06	0.07	0.08	0.10
		2100	0.09	0.11	0.06	0.07	0.08	0.09	0.11
		2300	0.11	0.12	0.07	0.08	0.09	0.10	0.13
		2500	0.13	0.14	0.08	0.09	0.10	0.11	0.14
		2700	0.16	0.15	0.09	0.10	0.12	0.13	0.16
		2900	0.18	0.16	0.10	0.11	0.13	0.14	0.18
		3100	0.20	0.18	0.12	0.13	0.15	0.16	0.20
		3300	0.22	0.19	0.13	0.14	0.17	0.18	0.22
		3500	0.24	0.20	0.15	0.16	0.19	0.20	0.24
		3700	0.27	0.21	0.17	0.18	0.21	0.22	0.26
		3900	0.29	0.23	0.19	0.20	0.23	0.24	0.28
		4100	0.31	0.24	0.21	0.22	0.25	0.26	0.31
		4300	0.30	0.25	0.23	0.24	0.28	0.29	0.34
		4500	0.35	0.26	0.25	0.26	0.30	0.31	0.37
078 (6.5) 102 (8.5) 120 (10) 150 (12.5)	XP	1900	0.02	0.12	0.05	0.06	0.07	0.08	0.10
		2100	0.02	0.13	0.06	0.07	0.08	0.09	0.11
		2300	0.04	0.14	0.07	0.08	0.09	0.10	0.13
		2500	0.11	0.16	0.08	0.09	0.10	0.11	0.14
		2700	0.18	0.17	0.09	0.10	0.12	0.13	0.16
		2900	0.25	0.19	0.10	0.11	0.13	0.14	0.18
		3100	0.31	0.20	0.12	0.13	0.15	0.16	0.20
		3300	0.37	0.22	0.13	0.14	0.17	0.18	0.22
		3500	0.43	0.26	0.15	0.16	0.19	0.20	0.24
		3700	0.49	0.27	0.17	0.18	0.21	0.22	0.26
		3900	0.54	0.29	0.19	0.20	0.23	0.24	0.28
		4100	0.58	0.32	0.21	0.22	0.25	0.26	0.31
		4300	0.65	0.35	0.23	0.24	0.28	0.29	0.34
		4500	0.69	0.38	0.25	0.26	0.30	0.31	0.37
		4700	0.74	0.41	0.28	0.29	0.33	0.34	0.40
		4900	0.78	0.44	0.30	0.31	0.35	0.37	0.43
		5100	0.82	0.47	0.33	0.34	0.38	0.40	0.46
		5300	0.86	0.51	0.35	0.37	0.41	0.43	0.49
		5500	0.89	0.55	0.38	0.40	0.44	0.46	0.53
		5700	0.93	0.58	0.41	0.43	0.47	0.49	0.56
		5900	0.96	0.62	0.44	0.46	0.50	0.53	0.59
		6100	0.98	0.67	0.47	0.49	0.53	0.56	0.62
		6300	1.01	0.71	0.50	0.53	0.56	0.59	0.65

1. Deduct these values from the available external static pressure shown in the respective Blower Performance Tables.
2. The pressure drop through the economizer is greater for 100% outdoor air than for 100% return air. If the resistance of the return air duct is less than 0.25 IWG, the unit will deliver less CFM during full economizer operation.

Drive Selection

1. Determine side or bottom supply duct Application.
2. Determine desired airflow.
3. Calculate or measure the amount of external static pressure.
4. Using the operating point determined from steps 1, 2 & 3, locate this point on the appropriate supply air blower performance table. (Linear interpolation may be necessary.)
5. Noting the RPM and BHP from step 4, locate the appropriate motor and, or drive on the RPM selection table.
6. Review the BHP compared to the motor options available. Select the appropriate motor and, or drive.
7. Review the RPM range for the motor options available. Select the appropriate drive if multiple drives are available for the chosen motor.
8. Determine turns open to obtain the desired operation point.

Example

1. 2600 CFM
2. 1.6 iwg
3. Using the supply air blower performance table below, the following data point was located: 1268 RPM & 1.95 BHP.
4. Using the RPM selection table below, Size X and Model Y is found.
5. 1.95 BHP exceeds the maximum continuous BHP rating of the 1.5 HP motor. The 2 HP motor is required.
6. 1268 RPM is within the range of the 2 HP drives.
7. Using the 2 HP motor and drive, .5 turns open will achieve 1268 RPM.

Airflow Performance

Example Supply Air Blower Performance


Air Flow (CFM)	Available External Static Pressure - IWG													
	0.2		0.4		0.6		0.8		1.0		1.2		1.4	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	1.5 HP & Field Supplied Drive				Standard 1.5 HP & Drive				Alternate 2 HP & Drive					
2200	804	0.50	866	0.71	925	0.90	982	1.06	1038	1.21	1092	1.35	1147	1.48
2400	835	0.66	897	0.87	956	1.06	1013	1.22	1069	1.37	1124	1.51	1178	1.64
2600	869	0.84	931	1.05	990	1.24	1047	1.40	1103	1.55	1158	1.69	1212	1.82
2800	906	1.03	968	1.25	1027	1.43	1084	1.60	1139	1.75	1194	1.89	1249	2.02
													1268	1.95
													1304	2.14
													1361	2.27
													-	-

Table X: RPM Selection

Size (Tons)	Model	HP	Max BHP	Motor Sheave	Blower Sheave	6 Turns Open	5 Turns Open	4 Turns Open	3 Turns Open	2 Turns Open	1 Turn Open	Fully Closed
X	Y	1.5	1.73	1VM50	AK74	N/A	897	945	991	1035	1079	1126
		2	2.30	1VM50	AK64	N/A	1039	1094	1150	1207	1256	1308

Altitude/Temperature Correction Factors

Air Temp.	Altitude (Ft.)										
	0	1000	2000	3000	4000	5000	6000	7000	8000	9000	10000
40	1.060	1.022	0.986	0.950	0.916	0.882	0.849	0.818	0.788	0.758	0.729
50	1.039	1.002	0.966	0.931	0.898	0.864	0.832	0.802	0.772	0.743	0.715
60	1.019	0.982	0.948	0.913	0.880	0.848	0.816	0.787	0.757	0.729	0.701
70	1.000	0.964	0.930	0.896	0.864	0.832	0.801	0.772	0.743	0.715	0.688
80	0.982	0.947	0.913	0.880	0.848	0.817	0.787	0.758	0.730	0.702	0.676
90	0.964	0.929	0.897	0.864	0.833	0.802	0.772	0.744	0.716	0.689	0.663
100	0.946	0.912	0.880	0.848	0.817	0.787	0.758	0.730	0.703	0.676	0.651

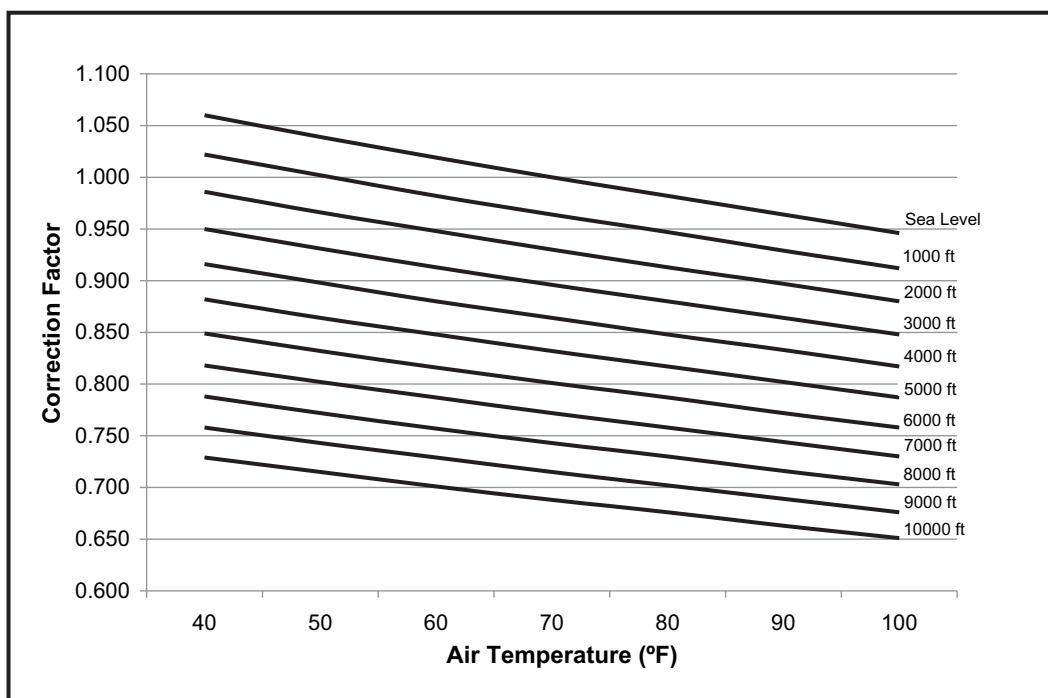

Electric Heat Minimum Supply Air

Size (Tons)	Model	Voltage	Minimum Supply Air (CFM)				
			Heater kW				
			9	18	24	36	54
078 (6.5)	XP	208/230-3-60	1950	1950	1950	1950	-
		460-3-60	1950	1950	1950	1950	-
		600-3-60	1950	1950	1950	1950	-
090 (7.5)	XP	208/230-3-60	2250	2250	2250	2250	-
		460-3-60	2250	2250	2250	2250	-
		600-3-60	2250	2250	2250	2250	-
102 (8.5)	XP	208/230-3-60	2550	2550	2550	2550	-
		460-3-60	2550	2550	2550	2550	-
		600-3-60	2550	2550	2550	2550	-
120 (10)	XP	208/230-3-60	-	3000	3000	3000	3500
		460-3-60	-	3000	3000	3000	3000
		600-3-60	-	3000	3000	3000	3500
150 (12.5)	XP	208/230-3-60	-	3750	3750	3750	4000
		460-3-60	-	3750	3750	3750	3750
		600-3-60	-	3750	3750	3750	3750

Indoor Blower Specifications

Size (Tons)	Model	Motor					Motor Sheave			Blower Sheave			Belt
		HP	RPM	Eff.	SF	Frame	Datum Dia. (in.)	Bore (in.)	Model	Datum Dia. (in.)	Bore (in.)	Model	
078 (6.5)	XP	1-1/2	1725	0.8	1.15	56	2.4 - 3.4	7/8	VL40	8.1	1	AK84	A54
		2	1725	0.8	1.15	56	2.8 - 3.8	7/8	VL44	6.7	1	AK71	A52
090 (7.5)	XP	1-1/2	1725	0.8	1.15	56	3.4 - 4.4	7/8	1VM50	7.0	1	AK74	A49
		3	1725	0.8	1.15	56	3.4 - 4.4	7/8	1VM50	5.7	1	AK61	A49
102 (8.5)	XP	2	1725	0.8	1.15	56	3.4 - 4.4	7/8	1VM50	8.5	1	AK89	A56
		3	1725	0.8	1.15	56	3.4 - 4.4	7/8	1VM50	7.0	1	AK74	A54
120 (10)	XP	2	1725	0.8	1.15	56	3.4 - 4.4	7/8	1VM50	8.0	1	AK84	A56
		3	1725	0.8	1.15	56	3.4 - 4.4	7/8	1VM50	7.0	1	AK74	A54
150 (12.5)	XP	3	1725	0.8	1.15	56	3.4 - 4.4	7/8	1VM50	7.0	1	AK74	A54
		5	1725	0.87	1.15	184T	4.3 - 5.3	1-1/8	1VP56	6.7	1	BK77	BX55

Power Exhaust Specifications

Model	Voltage	Motor			Motor			Fuse Size	CFM @ 0.1 ESP
		HP	RPM ¹	QTY	LRA	FLA	MCA		
2PE04703225	208/230-1-60	3/4	1075	1	7.8	5	6.3	10	3800
2PE04703246	460-1-60	3/4	1075	1	3.4	2.2	2.8	5	3800
2PE04703258	575-1-60	3/4	1050	1	2.9	1.5	1.9	4	3800

1. Motors are multi-tapped and factory wired for high speed.

Electric Heat Multipliers

Voltage		kW Capacity Multipliers ¹
Nominal	Applied	
240	208	0.75
	230	0.92
480	460	0.92
600	575	0.92

1. Electric heaters are rated at nominal voltage. Use this table to determine the electric heat capacity for heaters applied at lower voltages.

Sound Performance

Indoor Sound Power Levels

Size (Tons)	Model	CFM	ESP (IWG)	Blower		Sound Power, dB (10 ⁻¹²) Watts								
						Sound Rating ¹ dB (A)	Octave Band Centerline Frequency (Hz)							
				RPM	BHP		63	125	250	500	1000	2000	4000	8000
078 (6.5)	XP	2600	0.6	812	1.14	74	71	73	73	71	69	65	65	60
090 (7.5)	XP	3000	0.6	854	1.47	77	74	76	76	74	72	68	68	63
102 (8.5)	XP	3400	0.6	872	1.65	80	77	79	79	77	75	71	71	66
120 (10)	XP	4000	0.6	959	2.29	83	80	82	82	80	78	74	74	69
150 (12.5)	XP	5000	0.6	1132	3.74	87	84	86	86	84	82	78	78	73

1. These values have been accessed using a model of sound propagation from a point source into the hemispheric/free field. The dBA values provided are to be used for reference only. Calculation of dBA values cover matters of system design and the fan manufacture has no way of knowing the details of each system. This constitutes an exception to any specification or guarantee requiring a dBA value of sound data in any other form than sound power level ratings.

Outdoor Sound Power Levels

Size (Tons)	Model	Sound Rating ¹ dB (A)	Octave Band Centerline Frequency (Hz)						
			125	250	500	1000	2000	4000	8000
078 (6.5)	XP	83	88.0	82.5	81.5	78.0	73.0	69.0	62.0
090 (7.5)	XP	83	89.5	83.5	82.0	78.0	72.5	68.0	60.5
102 (8.5)	XP	83	89.0	84.5	81.5	78.0	72.5	68.5	70.5
120 (10)	XP	83	89.5	83.5	81.0	78.0	72.0	68.5	70.5
150 (12.5)	XP	84	90.0	84.5	81.5	77.5	72.0	68.5	61.5

1. Rated in accordance with AHRI 270 standard.

Electrical Data

XP078-150 Standard Motor - Without Powered Convenience Outlet

Size (Tons)	Volt	Compressors (each)			OD Fan Motors (each)	Supply Blower Motor	Pwr Exh Motor	Pwr Conv Outlet	Electric Heat Option				MCA ¹ (Amps)	MCA ¹ w/Pwr Exh (Amps)	Max Fuse ² / Breaker ³ Size (Amps)	Max Fuse ¹ / Breaker ³ Size w/ Pwr Exh (Amps)
		RLA	LRA	MCC					Model	kW	Stages	Amps				
078 (6.5)	208	13.5	88.0	15.1	1.5	6.2	5.5	0.0	None	-	-	-	39.6	45.1	50	50
									E09	6.8	1	18.9	63.2	68.7	70	70
									E18	13.5	2	37.5	86.4	91.9	90	100
									E24	18.0	2	50.0	102.0	107.5	110	110
									E36	25.5	2	70.8	128.1	133.6	150	150
	230	13.5	88.0	15.1	1.5	6.2	5.5	0.0	None	-	-	-	39.6	45.1	50	50
									E09	9.0	1	21.7	66.6	72.1	70	80
									E18	18.0	2	43.3	93.7	99.2	100	100
									E24	24.0	2	57.7	111.7	117.2	125	125
									E36	34.0	2	81.8	141.8	147.3	150	150
	460	6.0	44.0	9.3	0.8	3.1	2.2	0.0	None	-	-	-	18.2	20.4	20	25
									E09	9.0	1	10.8	31.7	33.9	35	35
									E18	18.0	2	21.7	45.3	47.5	50	50
									E24	24.0	2	28.9	54.3	56.5	60	60
									E36	34.0	2	40.9	69.3	71.5	70	80
	575	4.9	34.0	7.7	0.6	2.4	1.8	0.0	None	-	-	-	14.6	16.4	15	20
									E09	9.0	1	8.7	25.5	27.3	30	30
									E18	18.0	2	17.3	36.3	38.1	40	40
									E24	24.0	2	23.1	43.5	45.3	45	50
									E36	34.0	2	32.7	55.5	57.3	60	60
090 (7.5)	208	15.6	83.1	21.4	1.5	6.2	5.5	0.0	None	-	-	-	44.3	49.8	50	60
									E09	6.8	1	18.9	67.9	73.4	70	80
									E18	13.5	2	37.5	91.1	96.6	100	100
									E24	18	2	50.0	106.8	112.3	110	125
									E36	25.5	2	70.8	132.8	138.3	150	150
	230	15.6	83.1	21.4	1.5	6.2	5.5	0.0	None	-	-	-	44.3	49.8	50	60
									E09	9	1	21.7	71.4	76.9	80	80
									E18	18	2	43.3	98.4	103.9	100	110
									E24	24	2	57.7	116.5	122.0	125	125
									E36	34	2	81.8	146.5	152.0	150	175
	460	6.9	41	9.7	0.8	3.1	2.2	0.0	None	-	-	-	20.2	22.4	25	25
									E09	9	1	10.8	33.8	36.0	35	40
									E18	18	2	21.7	47.3	49.5	50	50
									E24	24	2	28.9	56.3	58.5	60	60
									E36	34	2	40.9	71.3	73.5	80	80
	575	5.4	33	7.5	0.6	2.4	1.8	0.0	None	-	-	-	15.8	17.6	20	20
									E09	9	1	8.7	26.6	28.4	30	30
									E18	18	2	17.3	37.4	39.2	40	40
									E24	24	2	23.1	44.6	46.4	45	50
									E36	34	2	32.7	56.6	58.4	60	60
102 (8.5)	208	16.7	120	26.0	1.5	8.2	5.5	0.0	None	-	-	-	48.8	54.3	60	70
									E09	6.8	1	18.9	72.4	77.9	80	80
									E18	13.5	2	37.5	95.6	101.1	100	110
									E24	18	2	50.0	111.2	116.7	125	125
									E36	25.5	2	70.8	137.3	142.8	150	150
	230	16.7	120	26.0	1.5	8.2	5.5	0.0	None	-	-	-	48.8	54.3	60	70
									E09	9	1	21.7	75.8	81.3	80	90
									E18	18	2	43.3	102.9	108.4	110	110
									E24	24	2	57.7	120.9	126.4	125	150
									E36	34	2	81.8	151.0	156.5	175	175
	460	8.7	60	13.5	0.8	4.1	2.2	0.0	None	-	-	-	25.3	27.5	30	35
									E09	9	1	10.8	38.8	41.0	40	45
									E18	18	2	21.7	52.3	54.5	60	60
									E24	24	2	28.9	61.4	63.6	70	70
									E36	34	2	40.9	76.4	78.6	80	80
	575	6.7	42	10.5	0.6	3.6	1.8	0.0	None	-	-	-	19.9	21.7	25	25
									E09	9	1	8.7	30.7	32.5	35	35
									E18	18	2	17.3	41.5	43.3	45	45
									E24	24	2	23.1	48.7	50.5	50	60
									E36	34	2	32.7	60.8	62.6	70	70

XP078-150 Standard Motor - Without Powered Convenience Outlet (Continued)

Size (Tons)	Volt	Compressors (each)			OD Fan Motors (each)	Supply Blower Motor	Pwr Exh Motor	Pwr Conv Outlet	Electric Heat Option				MCA ¹ (Amps)	MCA ¹ w/Pwr Exh (Amps)	Max Fuse ² / Breaker ³ Size (Amps)	Max Fuse ¹ / Breaker ³ Size w/ Pwr Exh (Amps)
		RLA	LRA	MCC					Model	kW	Stages	Amps				
120 (10)	208	16.0	110.0	24.9	1.5	8.2	5.5	0.0	None	-	-	-	47.2	52.7	60	60
									E18	13.5	2	37.5	94.0	99.5	100	100
									E24	18.0	2	50.0	109.7	115.2	110	125
									E36	25.5	2	70.8	135.7	141.2	150	150
									E54	40.6	2	112.7	151.1	158.0	175	175
	230	16.0	110.0	24.9	1.5	8.2	5.5	0.0	None	-	-	-	47.2	52.7	60	60
									E18	18.0	2	43.3	101.3	106.8	110	110
									E24	24.0	2	57.7	119.4	124.9	125	125
									E36	34.0	2	81.8	149.4	154.9	150	175
									E54	54.0	2	129.9	149.4	154.9	150	175
	460	7.8	52.0	12.1	0.8	4.1	2.2	0.0	None	-	-	-	23.3	25.5	30	30
									E18	18.0	2	21.7	50.3	52.5	60	60
									E24	24.0	2	28.9	59.3	61.5	60	70
									E36	34.0	2	40.9	74.4	76.6	80	80
									E54	54.0	2	65.0	74.4	76.6	80	80
	575	5.7	38.9	8.9	0.6	3.6	1.8	0.0	None	-	-	-	17.6	19.4	20	25
									E18	18.0	2	17.3	39.3	41.1	40	45
									E24	24.0	2	23.1	46.5	48.3	50	50
									E36	34.0	2	32.7	58.5	60.3	60	70
									E54	54.0	2	52.0	58.5	60.3	60	70
150 (12.5)	208	23.1	160	36.0	1.5	10.9	5.5	0.0	None	-	-	-	68.9	74.4	90	90
									E18	13.5	2	37.5	115.7	121.2	125	125
									E24	18	2	50.0	131.3	136.8	150	150
									E36	25.5	2	70.8	157.4	162.9	175	175
									E54	40.6	2	112.7	157.4	162.9	175	175
	230	23.1	160	36.0	1.5	10.9	5.5	0.0	None	-	-	-	68.9	74.4	90	90
									E18	18	2	43.3	123.0	128.5	125	150
									E24	24	2	57.7	141.0	146.5	150	150
									E36	34	2	81.8	171.1	176.6	175	200
									E54	54	2	129.9	171.1	176.6	175	200
	460	12.2	87	19.0	0.8	5.3	2.2	0.0	None	-	-	-	36.0	38.2	45	50
									E18	18	2	21.7	63.0	65.2	70	70
									E24	24	2	28.9	72.0	74.2	80	80
									E36	34	2	40.9	87.1	89.3	90	90
									E54	54	2	65.0	87.1	89.3	90	90
	575	8.7	62	13.5	0.6	4.1	1.8	0.0	None	-	-	-	26.1	27.9	30	35
									E18	18	2	17.3	47.7	49.5	50	50
									E24	24	2	23.1	54.9	56.7	60	60
									E36	34	2	32.7	67.0	68.8	70	70
									E54	54	2	52.0	67.0	68.8	70	70

1. Minimum Circuit Ampacity.
2. Dual Element, Time Delay Type.
3. HACR type per NEC.

XP078-150 Hi Static Motor - Without Powered Convenience Outlet

Size (Tons)	Volt	Compressors (each)			OD Fan Motors (each)	Supply Blower Motor	Pwr Exh Motor	Pwr Conv Outlet	Electric Heat Option				MCA ¹ (Amps)	MCA ¹ w/Pwr Exh (Amps)	Max Fuse ² / Breaker ³ Size (Amps)	Max Fuse ² / Breaker ³ Size w/ Pwr Exh (Amps)
		RLA	LRA	MCC					Model	kW	Stages	Amps				
078 (6.5)	208	13.5	88.0	15.1	1.5	8.2	5.5	0.0	None	-	-	-	41.6	47.1	50	60
									E09	6.8	1	18.9	65.2	70.7	70	80
									E18	13.5	2	37.5	88.4	93.9	90	100
									E24	18.0	2	50.0	104.0	109.5	110	110
									E36	25.5	2	70.8	130.1	135.6	150	150
	230	13.5	88.0	15.1	1.5	8.2	5.5	0.0	None	-	-	-	41.6	47.1	50	60
									E09	9.0	1	21.7	68.6	74.1	70	80
									E18	18.0	2	43.3	95.7	101.2	100	110
									E24	24.0	2	57.7	113.7	119.2	125	125
									E36	34.0	2	81.8	143.8	149.3	150	150
	460	6.0	44.0	9.3	0.8	4.1	2.2	0.0	None	-	-	-	19.2	21.4	25	25
									E09	9.0	1	10.8	32.7	34.9	35	35
									E18	18.0	2	21.7	46.3	48.5	50	50
									E24	24.0	2	28.9	55.3	57.5	60	60
									E36	34.0	2	40.9	70.3	72.5	80	80
	575	4.9	34.0	7.7	0.6	3.6	1.8	0.0	None	-	-	-	15.8	17.6	20	20
									E09	9.0	1	8.7	26.7	28.5	30	30
									E18	18.0	2	17.3	37.5	39.3	40	40
									E24	24.0	2	23.1	44.7	46.5	45	50
									E36	34.0	2	32.7	56.7	58.5	60	60
090 (7.5)	208	15.6	83.1	21.4	1.5	10.9	5.5	0.0	None	-	-	-	49.0	54.5	60	70
									E09	6.8	1	18.9	72.6	78.1	80	80
									E18	13.5	2	37.5	95.8	101.3	100	110
									E24	18	2	50.0	111.5	117.0	125	125
									E36	25.5	2	70.8	137.5	143.0	150	150
	230	15.6	83.1	21.4	1.5	10.9	5.5	0.0	None	-	-	-	49.0	54.5	60	70
									E09	9	1	21.7	76.1	81.6	80	90
									E18	18	2	43.3	103.1	108.6	110	110
									E24	24	2	57.7	121.2	126.7	125	150
									E36	34	2	81.8	151.2	156.7	175	175
	460	6.9	41	9.7	0.8	5.3	2.2	0.0	None	-	-	-	22.4	24.6	25	30
									E09	9	1	10.8	36.0	38.2	40	40
									E18	18	2	21.7	49.5	51.7	50	60
									E24	24	2	28.9	58.5	60.7	60	70
									E36	34	2	40.9	73.5	75.7	80	80
	575	5.4	33	7.5	0.6	4.1	1.8	0.0	None	-	-	-	17.5	19.3	20	20
									E09	9	1	8.7	28.3	30.1	30	35
									E18	18	2	17.3	39.1	40.9	40	45
									E24	24	2	23.1	46.3	48.1	50	50
									E36	34	2	32.7	58.3	60.1	60	70
102 (8.5)	208	16.7	120	26.0	1.5	10.9	5.5	0.0	None	-	-	-	51.5	57.0	60	70
									E09	6.8	1	18.9	75.1	80.6	80	90
									E18	13.5	2	37.5	98.3	103.8	100	110
									E24	18	2	50.0	113.9	119.4	125	125
									E36	25.5	2	70.8	140.0	145.5	150	150
	230	16.7	120	26.0	1.5	10.9	5.5	0.0	None	-	-	-	51.5	57.0	60	70
									E09	9	1	21.7	78.5	84.0	80	90
									E18	18	2	43.3	105.6	111.1	110	125
									E24	24	2	57.7	123.6	129.1	125	150
									E36	34	2	81.8	153.7	159.2	175	175
	460	8.7	60	13.5	0.8	5.3	2.2	0.0	None	-	-	-	26.5	28.7	35	35
									E09	9	1	10.8	40.0	42.2	45	45
									E18	18	2	21.7	53.5	55.7	60	60
									E24	24	2	28.9	62.6	64.8	70	70
									E36	34	2	40.9	77.6	79.8	80	80
	575	6.7	42	10.5	0.6	4.1	1.8	0.0	None	-	-	-	20.4	22.2	25	25
									E09	9	1	8.7	31.2	33.0	35	35
									E18	18	2	17.3	42.0	43.8	45	45
									E24	24	2	23.1	49.2	51.0	50	60
									E36	34	2	32.7	61.3	63.1	70	70

XP078-150 Hi Static Motor - Without Powered Convenience Outlet (Continued)

Size (Tons)	Volt	Compressors (each)			OD Fan Motors (each)	Supply Blower Motor	Pwr Exh Motor	Pwr Conv Outlet	Electric Heat Option				MCA ¹ (Amps)	MCA ¹ w/Pwr Exh (Amps)	Max Fuse ² / Breaker ³ Size (Amps)	Max Fuse ² / Breaker ³ Size w/ Pwr Exh (Amps)
		RLA	LRA	MCC					FLA	FLA	FLA	FLA				
120 (10)	208	16.0	110.0	24.9	1.5	10.9	5.5	0.0	None	-	-	-	49.9	55.4	60	70
									E18	13.5	2	37.5	96.7	102.2	100	110
									E24	18.0	2	50.0	112.4	117.9	125	125
									E36	25.5	2	70.8	138.4	143.9	150	150
									E54	40.6	2	112.7	154.5	161.4	175	175
	230	16.0	110.0	24.9	1.5	10.9	5.5	0.0	None	-	-	-	49.9	55.4	60	70
									E18	18.0	2	43.3	104.0	109.5	110	110
									E24	24.0	2	57.7	122.1	127.6	125	150
									E36	34.0	2	81.8	152.1	157.6	175	175
									E54	54.0	2	129.9	152.1	157.6	175	175
	460	7.8	52.0	12.1	0.8	5.3	2.2	0.0	None	-	-	-	24.5	26.7	30	30
									E18	18.0	2	21.7	51.5	53.7	60	60
									E24	24.0	2	28.9	60.5	62.7	70	70
									E36	34.0	2	40.9	75.6	77.8	80	80
									E54	54.0	2	65.0	75.6	77.8	80	80
	575	5.7	38.9	8.9	0.6	4.1	1.8	0.0	None	-	-	-	18.1	19.9	20	25
									E18	18.0	2	17.3	39.8	41.6	40	45
									E24	24.0	2	23.1	47.0	48.8	50	50
									E36	34.0	2	32.7	59.0	60.8	60	70
									E54	54.0	2	52.0	59.0	60.8	60	70
150 (12.5)	208	23.1	160	36.0	1.5	16.1	5.5	0.0	None	-	-	-	74.1	79.6	90	100
									E18	13.5	2	37.5	120.9	126.4	125	150
									E24	18	2	50.0	136.5	142.0	150	150
									E36	25.5	2	70.8	162.6	168.1	175	175
									E54	40.6	2	112.7	162.6	168.1	175	175
	230	23.1	160	36.0	1.5	16.1	5.5	0.0	None	-	-	-	74.1	79.6	90	100
									E18	18	2	43.3	128.2	133.7	150	150
									E24	24	2	57.7	146.2	151.7	150	175
									E36	34	2	81.8	176.3	181.8	200	200
									E54	54	2	129.9	176.3	181.8	200	200
	460	12.2	87	19.0	0.8	8.1	2.2	0.0	None	-	-	-	38.8	41.0	50	50
									E18	18	2	21.7	65.8	68.0	70	70
									E24	24	2	28.9	74.8	77.0	80	80
									E36	34	2	40.9	89.9	92.1	90	100
									E54	54	2	65.0	89.9	92.1	90	100
	575	8.7	62	13.5	0.6	6.0	1.8	0.0	None	-	-	-	28.0	29.8	35	35
									E18	18	2	17.3	49.6	51.4	50	60
									E24	24	2	23.1	56.8	58.6	60	60
									E36	34	2	32.7	68.9	70.7	70	80
									E54	54	2	52.0	68.9	70.7	70	80

1. Minimum Circuit Ampacity.
2. Dual Element, Time Delay Type.
3. HACR type per NEC.

XP078-150 Standard Motor - With Powered Convenience Outlet

Size (Tons)	Volt	Compressors (each)			OD Fan Motors (each)	Supply Blower Motor	Pwr Exh Motor	Pwr Conv Outlet	Electric Heat Option				MCA ¹ (Amps)	MCA ¹ w/Pwr Exh (Amps)	Max Fuse ² / Breaker ³ Size (Amps)	Max Fuse ² / Breaker ³ Size w/ Pwr Exh (Amps)
		RLA	LRA	MCC					Model	kW	Stages	Amps				
078 (6.5)	208	13.5	88.0	15.1	1.5	6.2	5.5	10.0	None	-	-	-	49.6	55.1	60	60
									E09	6.8	1	18.9	73.2	78.7	80	80
									E18	13.5	2	37.5	96.4	101.9	100	110
									E24	18.0	2	50.0	112.0	117.5	125	125
									E36	25.5	2	70.8	138.1	143.6	150	150
	230	13.5	88.0	15.1	1.5	6.2	5.5	10.0	None	-	-	-	49.6	55.1	60	60
									E09	9.0	1	21.7	76.6	82.1	80	90
									E18	18.0	2	43.3	103.7	109.2	110	110
									E24	24.0	2	57.7	121.7	127.2	125	150
									E36	34.0	2	81.8	151.8	157.3	175	175
	460	6.0	44.0	9.3	0.8	3.1	2.2	5.0	None	-	-	-	23.2	25.4	25	30
									E09	9.0	1	10.8	36.7	38.9	40	40
									E18	18.0	2	21.7	50.3	52.5	60	60
									E24	24.0	2	28.9	59.3	61.5	60	70
									E36	34.0	2	40.9	74.3	76.5	80	80
	575	4.9	34.0	7.7	0.6	2.4	1.8	4.0	None	-	-	-	18.6	20.4	20	25
									E09	9.0	1	8.7	29.5	31.3	30	35
									E18	18.0	2	17.3	40.3	42.1	45	45
									E24	24.0	2	23.1	47.5	49.3	50	50
									E36	34.0	2	32.7	59.5	61.3	60	70
090 (7.5)	208	15.6	83.1	21.4	1.5	6.2	5.5	10.0	None	-	-	-	54.3	59.8	60	70
									E09	6.8	1	18.9	77.9	83.4	80	90
									E18	13.5	2	37.5	101.1	106.6	110	110
									E24	18	2	50.0	116.8	122.3	125	125
									E36	25.5	2	70.8	142.8	148.3	150	150
	230	15.6	83.1	21.4	1.5	6.2	5.5	10.0	None	-	-	-	54.3	59.8	60	70
									E09	9	1	21.7	81.4	86.9	90	90
									E18	18	2	43.3	108.4	113.9	110	125
									E24	24	2	57.7	126.5	132.0	150	150
									E36	34	2	81.8	156.5	162.0	175	175
	460	6.9	41	9.7	0.8	3.1	2.2	5.0	None	-	-	-	25.2	27.4	30	30
									E09	9	1	10.8	38.8	41.0	40	45
									E18	18	2	21.7	52.3	54.5	60	60
									E24	24	2	28.9	61.3	63.5	70	70
									E36	34	2	40.9	76.3	78.5	80	80
	575	5.4	33	7.5	0.6	2.4	1.8	4.0	None	-	-	-	19.8	21.6	25	25
									E09	9	1	8.7	30.6	32.4	35	35
									E18	18	2	17.3	41.4	43.2	45	45
									E24	24	2	23.1	48.6	50.4	50	60
									E36	34	2	32.7	60.6	62.4	70	70
102 (8.5)	208	16.7	120	26.0	1.5	8.2	5.5	10.0	None	-	-	-	58.8	64.3	70	80
									E09	6.8	1	18.9	82.4	87.9	90	90
									E18	13.5	2	37.5	105.6	111.1	110	125
									E24	18	2	50.0	121.2	126.7	125	150
									E36	25.5	2	70.8	147.3	152.8	150	175
	230	16.7	120	26.0	1.5	8.2	5.5	10.0	None	-	-	-	58.8	64.3	70	80
									E09	9	1	21.7	85.8	91.3	90	100
									E18	18	2	43.3	112.9	118.4	125	125
									E24	24	2	57.7	130.9	136.4	150	150
									E36	34	2	81.8	161.0	166.5	175	175
	460	8.7	60	13.5	0.8	4.1	2.2	5.0	None	-	-	-	30.3	32.5	35	40
									E09	9	1	10.8	43.8	46.0	45	50
									E18	18	2	21.7	57.3	59.5	60	60
									E24	24	2	28.9	66.4	68.6	70	70
									E36	34	2	40.9	81.4	83.6	90	90
	575	6.7	42	10.5	0.6	3.6	1.8	4.0	None	-	-	-	23.9	25.7	30	30
									E09	9	1	8.7	34.7	36.5	35	40
									E18	18	2	17.3	45.5	47.3	50	50
									E24	24	2	23.1	52.7	54.5	60	60
									E36	34	2	32.7	64.8	66.6	70	70

XP078-150 Standard Motor - With Powered Convenience Outlet (Continued)

Size (Tons)	Volt	Compressors (each)			OD Fan Motors (each)	Supply Blower Motor	Pwr Exh Motor	Pwr Conv Outlet	Electric Heat Option				MCA ¹ (Amps)	MCA ¹ w/Pwr Exh (Amps)	Max Fuse ² / Breaker ³ Size (Amps)	Max Fuse ² / Breaker ³ Size w/ Pwr Exh (Amps)
		RLA	LRA	MCC					FLA	FLA	FLA	FLA				
120 (10)	208	16.0	110.0	24.9	1.5	8.2	5.5	10.0	None	-	-	-	57.2	62.7	70	70
									E18	13.5	2	37.5	104.0	109.5	110	110
									E24	18.0	2	50.0	119.7	125.2	125	150
									E36	25.5	2	70.8	145.7	151.2	150	175
									E54	40.6	2	112.7	163.6	170.5	175	175
	230	16.0	110.0	24.9	1.5	8.2	5.5	10.0	None	-	-	-	57.2	62.7	70	70
									E18	18.0	2	43.3	111.3	116.8	125	125
									E24	24.0	2	57.7	129.4	134.9	150	150
									E36	34.0	2	81.8	159.4	164.9	175	175
									E54	54.0	2	129.9	159.4	164.9	175	175
	460	7.8	52.0	12.1	0.8	4.1	2.2	5.0	None	-	-	-	28.3	30.5	35	35
									E18	18.0	2	21.7	55.3	57.5	60	60
									E24	24.0	2	28.9	64.3	66.5	70	70
									E36	34.0	2	40.9	79.4	81.6	80	90
									E54	54.0	2	65.0	79.4	81.6	80	90
	575	5.7	38.9	8.9	0.6	3.6	1.8	4.0	None	-	-	-	21.6	23.4	25	25
									E18	18.0	2	17.3	43.3	45.1	45	50
									E24	24.0	2	23.1	50.5	52.3	60	60
									E36	34.0	2	32.7	62.5	64.3	70	70
									E54	54.0	2	52.0	62.5	64.3	70	70
150 (12.5)	208	23.1	160	36.0	1.5	10.9	5.5	10.0	None	—	—	-	78.9	84.4	100	100
									E18	13.5	2	37.5	125.7	131.2	150	150
									E24	18	2	50.0	141.3	146.8	150	150
									E36	25.5	2	70.8	167.4	172.9	175	175
									E54	40.6	2	112.7	167.4	173.9	175	175
	230	23.1	160	36.0	1.5	10.9	5.5	10.0	None	—	—	-	78.9	84.4	100	100
									E18	18	2	43.3	133.0	138.5	150	150
									E24	24	2	57.7	151.0	156.5	175	175
									E36	34	2	81.8	181.1	186.6	200	200
									E54	54	2	129.9	181.1	186.6	200	200
	460	12.2	87	19.0	0.8	5.3	2.2	5.0	None	—	—	-	41.0	43.2	50	50
									E18	18	2	21.7	68.0	70.2	70	80
									E24	24	2	28.9	77.0	79.2	80	80
									E36	34	2	40.9	92.1	94.3	100	100
									E54	54	2	65.0	92.1	94.3	100	100
	575	8.7	62	13.5	0.6	4.1	1.8	4.0	None	—	—	-	30.1	31.9	35	40
									E18	18	2	17.3	51.7	53.5	60	60
									E24	24	2	23.1	58.9	60.7	60	70
									E36	34	2	32.7	71.0	72.8	80	80
									E54	54	2	52.0	71.0	72.8	80	80

1. Minimum Circuit Ampacity.
2. Dual Element, Time Delay Type.
3. HACR type per NEC.

XP078-150 Hi Static Motor - With Powered Convenience Outlet

Size (Tons)	Volt	Compressors (each)			OD Fan Motors (each)	Supply Blower Motor	Pwr Exh Motor	Pwr Conv Outlet	Electric Heat Option				MCA ¹ (Amps)	MCA ¹ w/Pwr Exh (Amps)	Max Fuse ² / Breaker ³ Size (Amps)	Max Fuse ² / Breaker ³ Size w/ Pwr Exh (Amps)
		RLA	LRA	MCC					Model	kW	Stages	Amps				
078 (6.5)	208	13.5	88.0	15.1	1.5	8.2	5.5	10.0	None	-	-	-	51.6	57.1	60	70
									E09	6.8	1	18.9	75.2	80.7	80	90
									E18	13.5	2	37.5	98.4	103.9	100	110
									E24	18.0	2	50.0	114.0	119.5	125	125
									E36	25.5	2	70.8	140.1	145.6	150	150
	230	13.5	88.0	15.1	1.5	8.2	5.5	10.0	None	-	-	-	51.6	57.1	60	70
									E09	9.0	1	21.7	78.6	84.1	80	90
									E18	18.0	2	43.3	105.7	111.2	110	125
									E24	24.0	2	57.7	123.7	129.2	125	150
									E36	34.0	2	81.8	153.8	159.3	175	175
	460	6.0	44.0	9.3	0.8	4.1	2.2	5.0	None	-	-	-	24.2	26.4	30	30
									E09	9.0	1	10.8	37.7	39.9	40	40
									E18	18.0	2	21.7	51.3	53.5	60	60
									E24	24.0	2	28.9	60.3	62.5	70	70
									E36	34.0	2	40.9	75.3	77.5	80	80
	575	4.9	34.0	7.7	0.6	3.6	1.8	4.0	None	-	-	-	19.8	21.6	20	25
									E09	9.0	1	8.7	30.7	32.5	35	35
									E18	18.0	2	17.3	41.5	43.3	45	45
									E24	24.0	2	23.1	48.7	50.5	50	60
									E36	34.0	2	32.7	60.7	62.5	70	70
090 (7.5)	208	15.6	83.1	21.4	1.5	10.9	5.5	10.0	None	-	-	-	59.0	64.5	70	80
									E09	6.8	1	18.9	82.6	88.1	90	90
									E18	13.5	2	37.5	105.8	111.3	110	125
									E24	18	2	50.0	121.5	127.0	125	150
									E36	25.5	2	70.8	147.5	153.0	150	175
	230	15.6	83.1	21.4	1.5	10.9	5.5	10.0	None	-	-	-	59.0	64.5	70	80
									E09	9	1	21.7	86.1	91.6	90	100
									E18	18	2	43.3	113.1	118.6	125	125
									E24	24	2	57.7	131.2	136.7	150	150
									E36	34	2	81.8	161.2	166.7	175	175
	460	6.9	41	9.7	0.8	5.3	2.2	5.0	None	-	-	-	27.4	29.6	30	35
									E09	9	1	10.8	41.0	43.2	45	45
									E18	18	2	21.7	54.5	56.7	60	60
									E24	24	2	28.9	63.5	65.7	70	70
									E36	34	2	40.9	78.5	80.7	80	90
	575	5.4	33	7.5	0.6	4.1	1.8	4.0	None	-	-	-	21.5	23.3	25	25
									E09	9	1	8.7	32.3	34.1	35	35
									E18	18	2	17.3	43.1	44.9	45	45
									E24	24	2	23.1	50.3	52.1	60	60
									E36	34	2	32.7	62.3	64.1	70	70
102 (8.5)	208	16.7	120	26.0	1.5	10.9	5.5	10.0	None	-	-	-	61.5	67.0	70	80
									E09	6.8	1	18.9	85.1	90.6	90	100
									E18	13.5	2	37.5	108.3	113.8	110	125
									E24	18	2	50.0	123.9	129.4	125	150
									E36	25.5	2	70.8	150.0	155.5	150	175
	230	16.7	120	26.0	1.5	10.9	5.5	10.0	None	-	-	-	61.5	67.0	70	80
									E09	9	1	21.7	88.5	94.0	90	100
									E18	18	2	43.3	115.6	121.1	125	125
									E24	24	2	57.7	133.6	139.1	150	150
									E36	34	2	81.8	163.7	169.2	175	175
	460	8.7	60	13.5	0.8	5.3	2.2	5.0	None	-	-	-	31.5	33.7	40	40
									E09	9	1	10.8	45.0	47.2	50	50
									E18	18	2	21.7	58.5	60.7	60	70
									E24	24	2	28.9	67.6	69.8	70	70
									E36	34	2	40.9	82.6	84.8	90	90
	575	6.7	42	10.5	0.6	4.1	1.8	4.0	None	-	-	-	24.4	26.2	30	30
									E09	9	1	8.7	35.2	37.0	40	40
									E18	18	2	17.3	46.0	47.8	50	50
									E24	24	2	23.1	53.2	55.0	60	60
									E36	34	2	32.7	65.3	67.1	70	70

XP078-150 Hi Static Motor - With Powered Convenience Outlet (Continued)


Size (Tons)	Volt	Compressors (each)			OD Fan Motors (each)	Supply Blower Motor	Pwr Exh Motor	Pwr Conv Outlet	Electric Heat Option				MCA ¹ (Amps)	MCA ¹ w/Pwr Exh (Amps)	Max Fuse ² / Breaker ³ Size (Amps)	Max Fuse ² / Breaker ³ Size w/ Pwr Exh (Amps)
		RLA	LRA	MCC					FLA	FLA	FLA	FLA				
120 (10)	208	16.0	110.0	24.9	1.5	10.9	5.5	10.0	None	-	-	-	59.9	65.4	70	80
									E18	13.5	2	37.5	106.7	112.2	110	125
									E24	18.0	2	50.0	122.4	127.9	125	150
									E36	25.5	2	70.8	148.4	153.9	150	175
									E54	40.6	2	112.7	167.0	173.9	175	175
	230	16.0	110.0	24.9	1.5	10.9	5.5	10.0	None	-	-	-	59.9	65.4	70	80
									E18	18.0	2	43.3	114.0	119.5	125	125
									E24	24.0	2	57.7	132.1	137.6	150	150
									E36	34.0	2	81.8	162.1	167.6	175	175
									E54	54.0	2	129.9	162.1	167.6	175	175
	460	7.8	52.0	12.1	0.8	5.3	2.2	5.0	None	-	-	-	29.5	31.7	35	35
									E18	18.0	2	21.7	56.5	58.7	60	60
									E24	24.0	2	28.9	65.5	67.7	70	70
									E36	34.0	2	40.9	80.6	82.8	90	90
									E54	54.0	2	65.0	80.6	82.8	90	90
	575	5.7	38.9	8.9	0.6	4.1	1.8	4.0	None	-	-	-	22.1	23.9	25	25
									E18	18.0	2	17.3	43.8	45.6	45	50
									E24	24.0	2	23.1	51.0	52.8	60	60
									E36	34.0	2	32.7	63.0	64.8	70	70
									E54	54.0	2	52.0	63.0	64.8	70	70
150 (12.5)	208	23.1	160	36.0	1.5	16.1	5.5	10.0	None	—	—	-	84.1	89.6	100	110
									E18	13.5	2	37.5	130.9	136.4	150	150
									E24	18	2	50.0	146.5	152.0	150	175
									E36	25.5	2	70.8	172.6	178.1	175	200
									E54	40.6	2	112.7	173.5	180.4	175	200
	230	23.1	160	36.0	1.5	16.1	5.5	10.0	None	—	—	-	84.1	89.6	100	110
									E18	18	2	43.3	138.2	143.7	150	150
									E24	24	2	57.7	156.2	161.7	175	175
									E36	34	2	81.8	186.3	191.8	200	200
									E54	54	2	129.9	186.3	191.8	200	200
	460	12.2	87	19.0	0.8	8.1	2.2	5.0	None	—	—	-	43.8	46.0	50	50
									E18	18	2	21.7	70.8	73.0	80	80
									E24	24	2	28.9	79.8	82.0	80	90
									E36	34	2	40.9	94.9	97.1	100	100
									E54	54	2	65.0	94.9	97.1	100	100
	575	8.7	62	13.5	0.6	6.0	1.8	4.0	None	—	—	-	32.0	33.8	40	40
									E18	18	2	17.3	53.6	55.4	60	60
									E24	24	2	23.1	60.8	62.6	70	70
									E36	34	2	32.7	72.9	74.7	80	80
									E54	54	2	52.0	72.9	74.7	80	80

1. Minimum Circuit Ampacity.
2. Dual Element, Time Delay Type.
3. HACR type per NEC.


Typical Wiring Diagrams

XP078-150 Typical Wiring Diagrams

Typical XP078-120 Heat Pump with/without Electric Heat Wiring Diagram

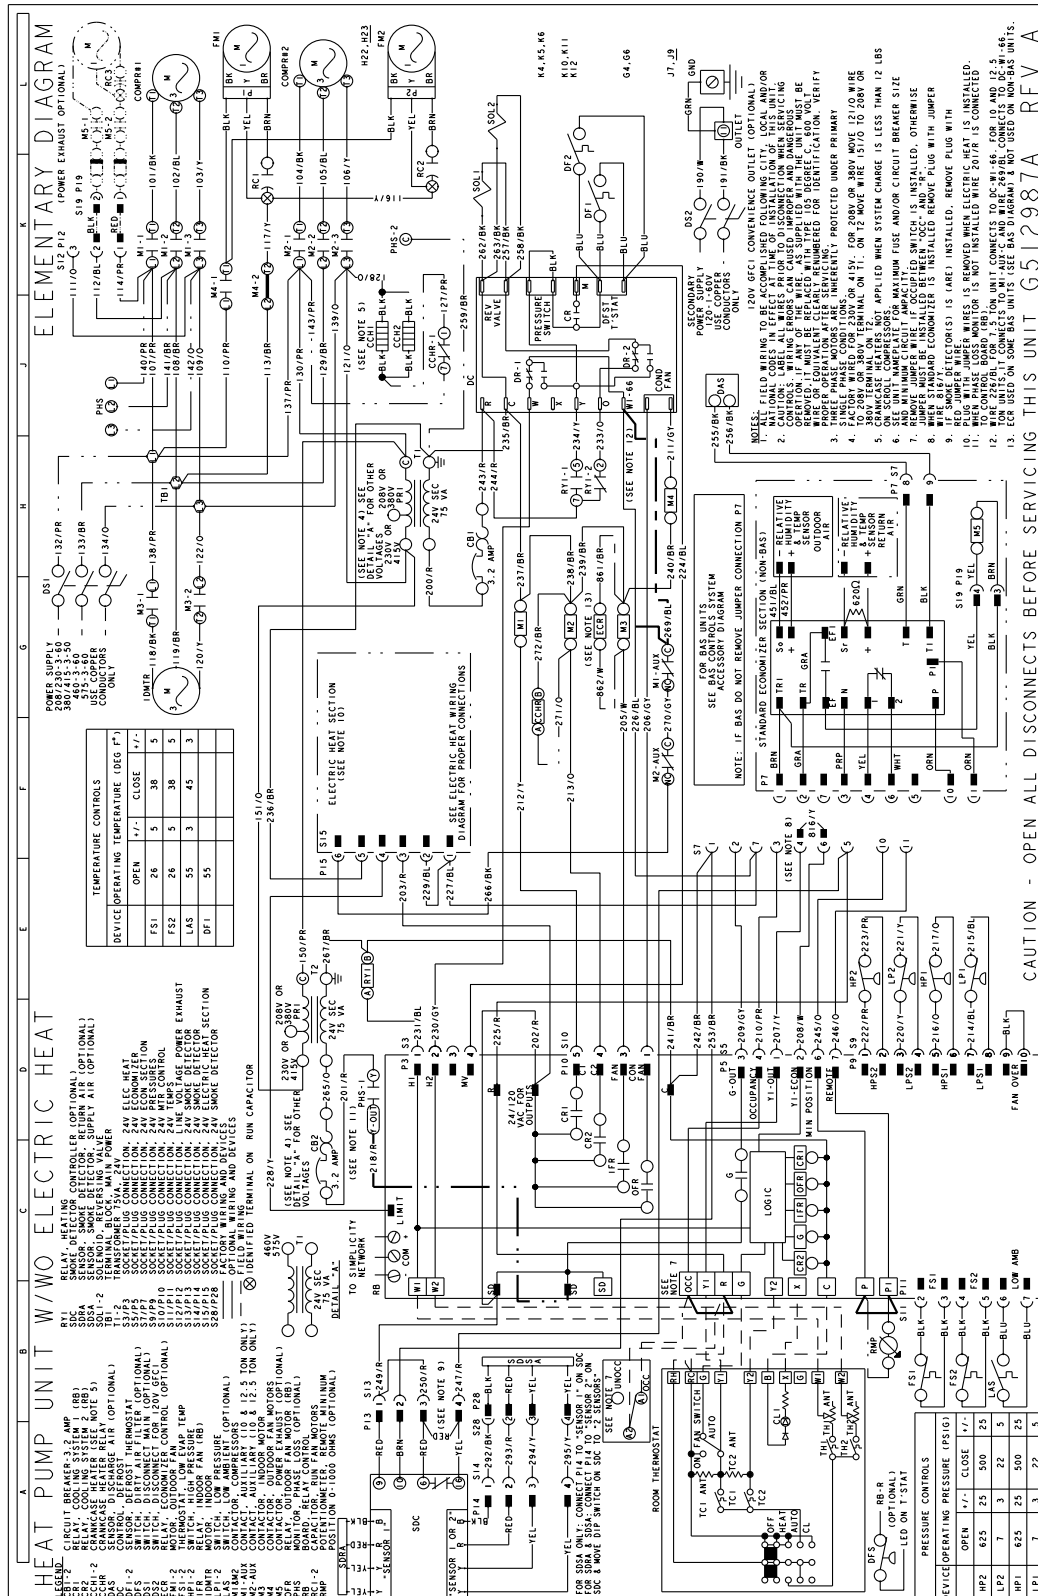


Johnson Controls Unitary Products

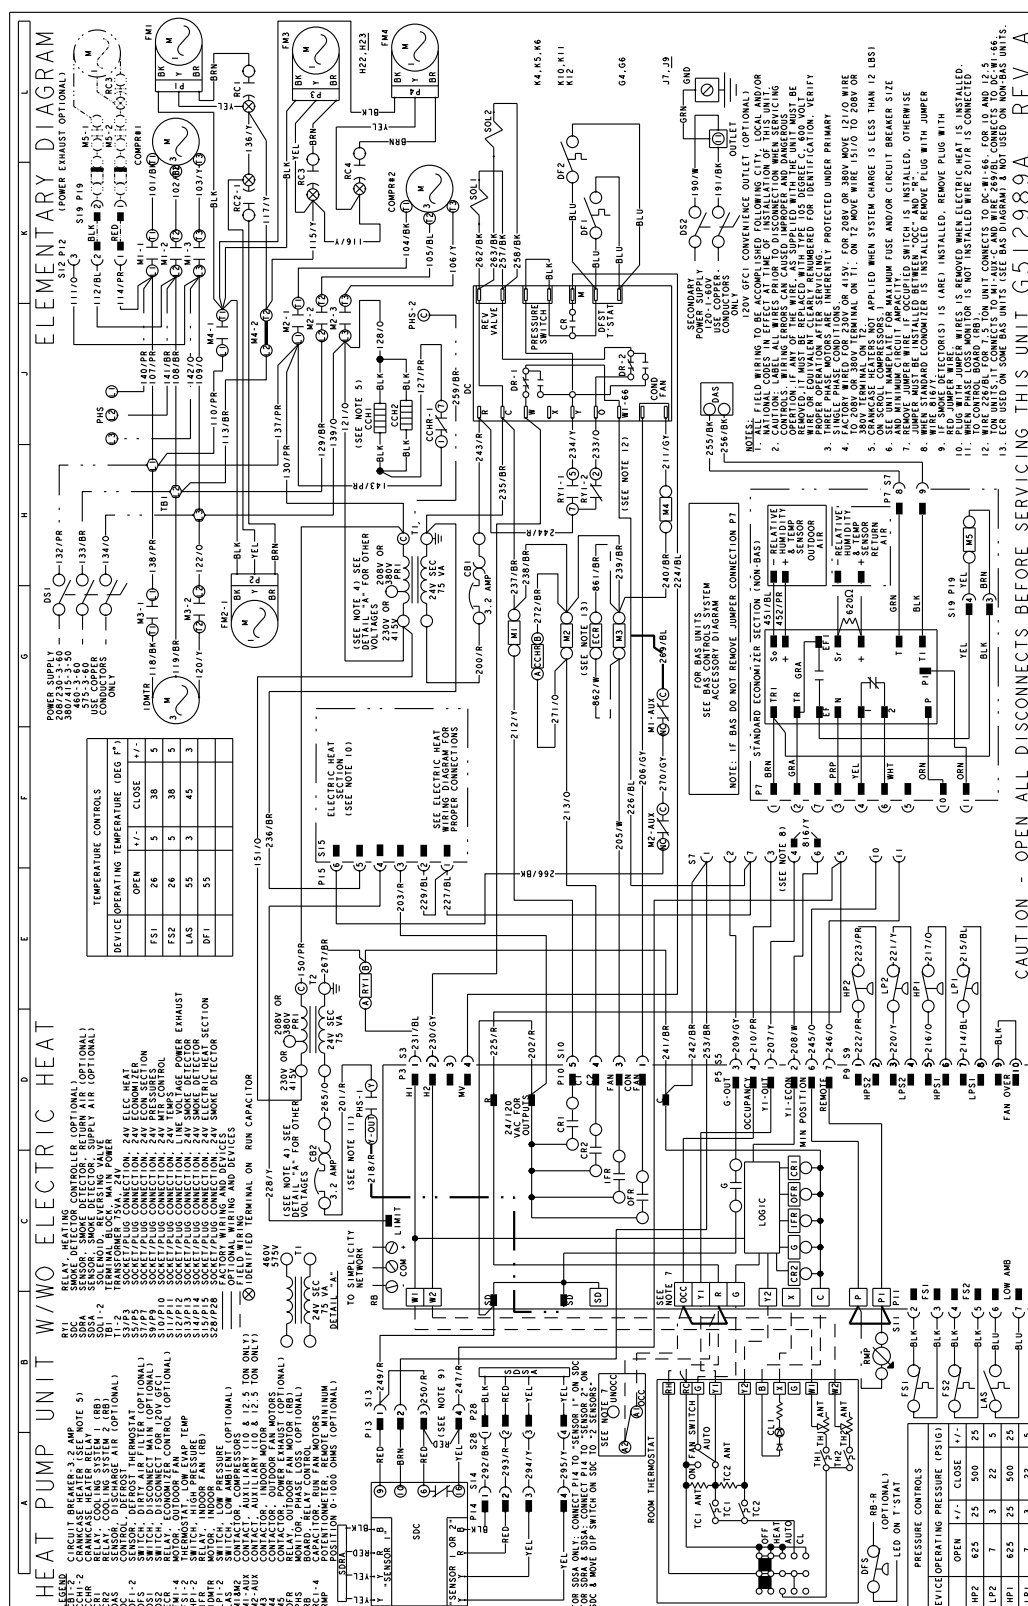



Weights and Dimensions

XP078-150 Unit Weights

Unit 4 Point Load Weight

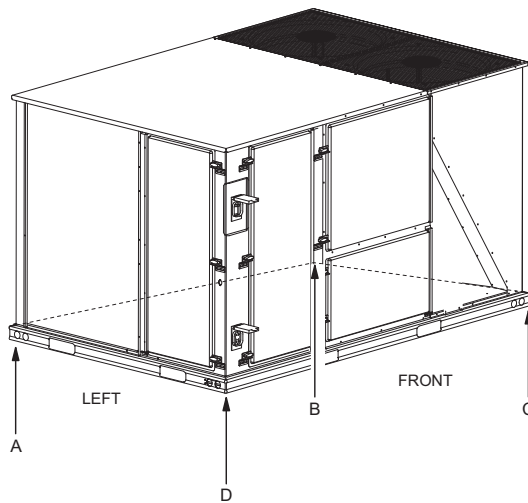

Unit 6 Point Load Weight

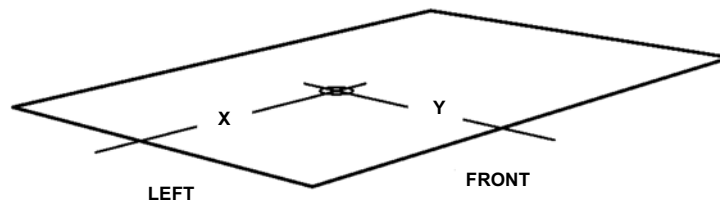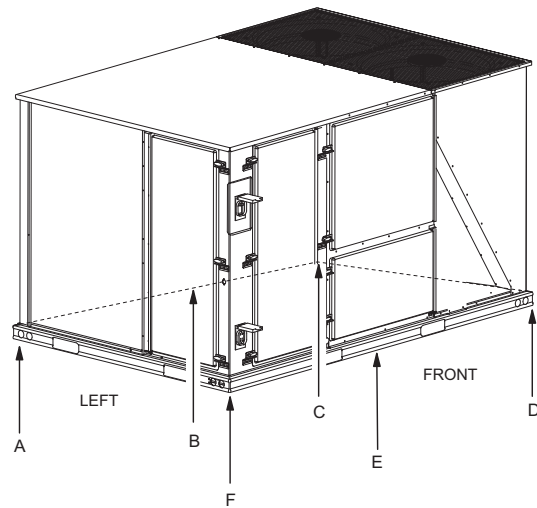

Size (Tons)	Model	Weight (lbs.)		Center of Gravity		4 Point Load Location (lbs.)				6 Point Load Location (lbs.)					
		Shipping	Operating	X	Y	A	B	C	D	A	B	C	D	E	F
078 (6.5)	XP	1085	1080	38	25	262	195	266	357	184	150	124	169	204	250
090 (7.5)	XP	925	920	38	23	206	153	240	322	144	117	97	152	184	225
102 (8.5)	XP	1140	1135	38	25.5	281	209	275	369	197	160	133	175	211	259
120 (10)	XP	1140	1135	38	25.5	281	209	275	369	197	160	133	175	211	259
150 (12.5)	XP	1405	1400	51	25.5	258	347	456	339	164	198	243	319	260	216


XP078-150 Unit Accessory Weights

Unit Accessory	Weight (lbs.)	
	Shipping	Operating
Economizer	90	85
Power Exhaust	40	35
Electric Heat ¹	49	49


1. Weight given is for the maximum heater size available (54KW).

XP078-150 Unit Dimensions

XP078-120

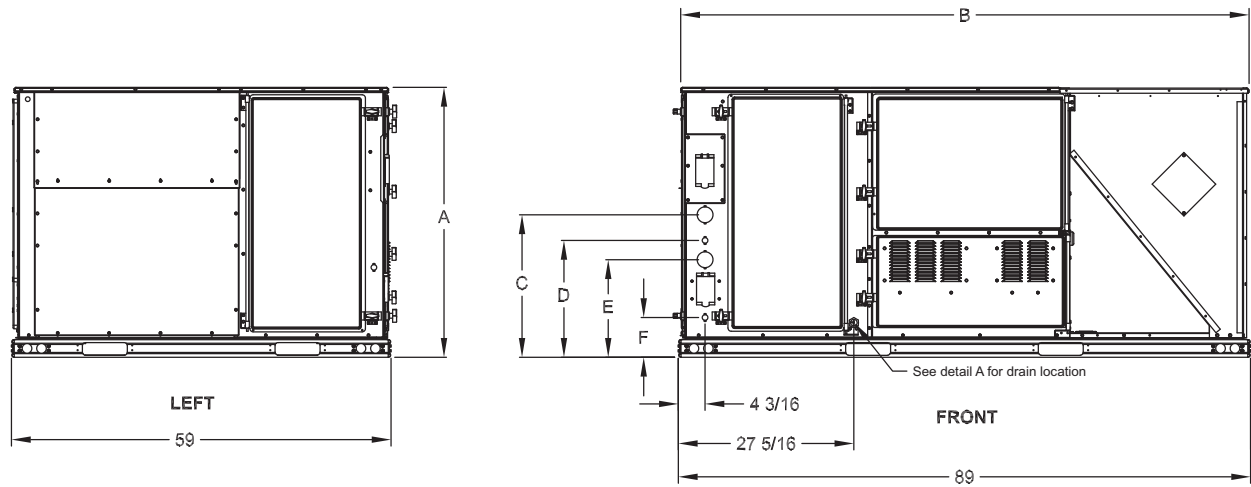


XP150

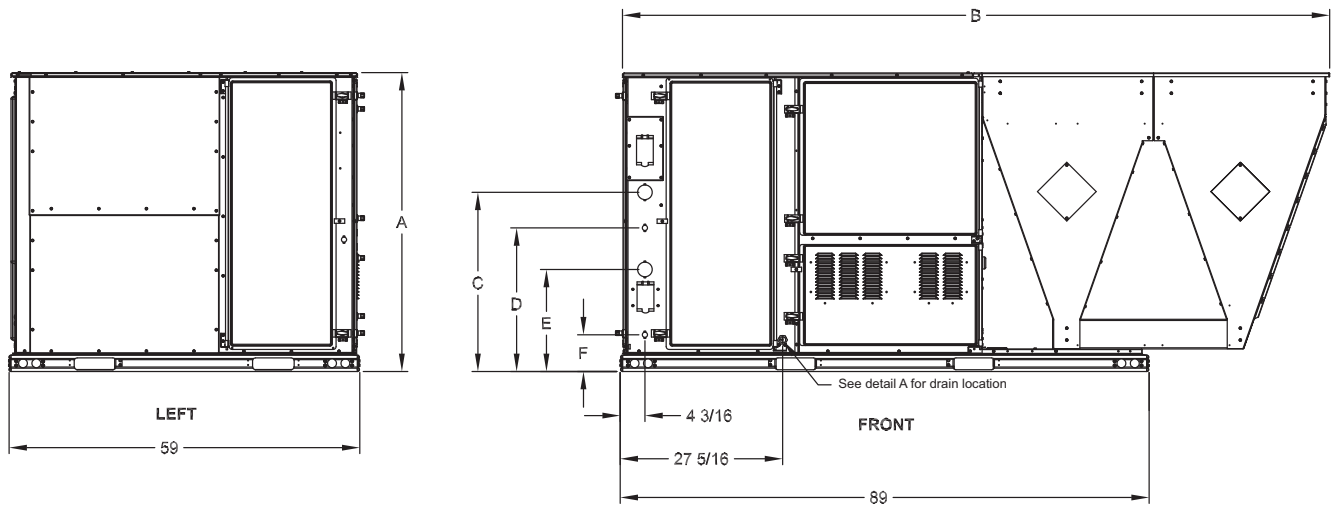


XP078-150 Unit Physical Dimensions

Unit Model Number	Dimension (in.)					
	A	B	C	D	E	F
078	50 3/4	89	30 3/16	24 3/16	17 3/16	6 3/16
090	42	89	22 1/8	18 3/16	15 3/16	6 3/16
102	50 3/4	89	30 3/16	24 3/16	17 3/16	6 3/16
120	50 3/4	89	30 3/16	24 3/16	17 3/16	6 3/16
150	50 3/4	119 1/2	30 3/16	24 3/16	17 3/16	6 3/16

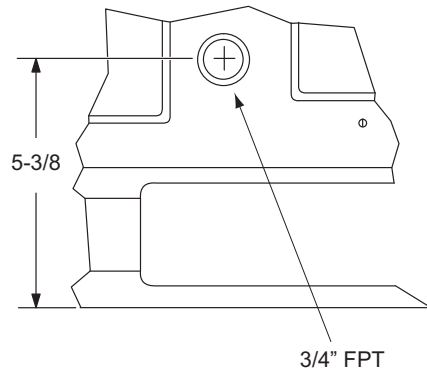
Detail A**XP078-150 Unit Clearances**

Direction	Distance (in.)	Direction	Distance (in.)
Top ¹	72	Right	12
Front	36	Left	36
Rear	36	Bottom ²	0


1. Units must be installed outdoors. Over hanging structure or shrubs should not obscure condenser air discharge outlet.
2. Units may be installed on combustible floors made from wood or class A, B or C roof covering materials.

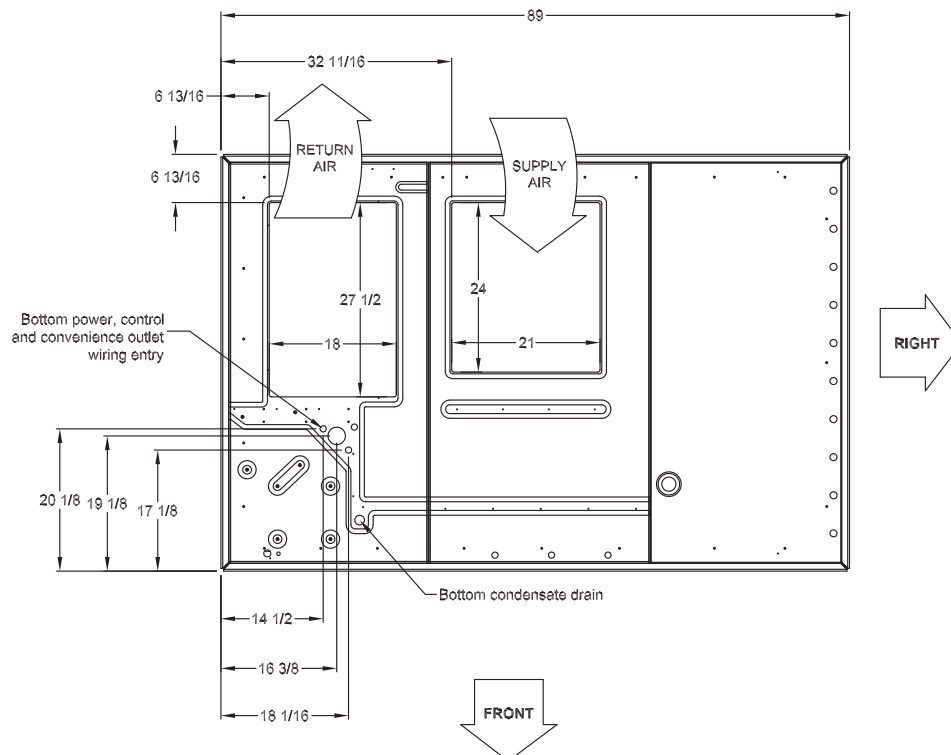XP078-150 Unit Bottom Duct Openings


XP078-150 Unit Electrical Entry

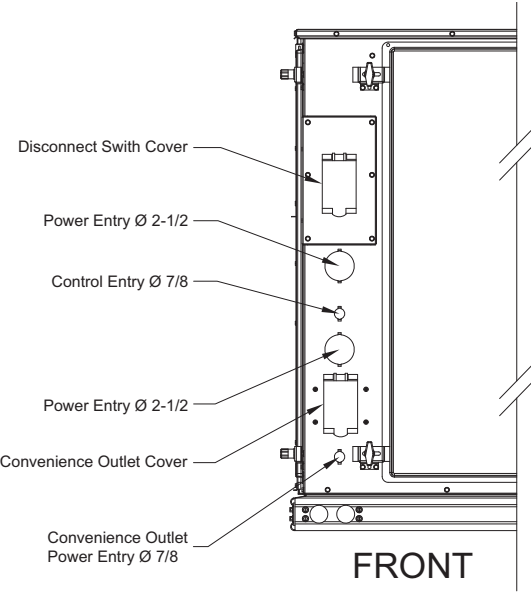

XP078-120 Unit Side Duct Openings

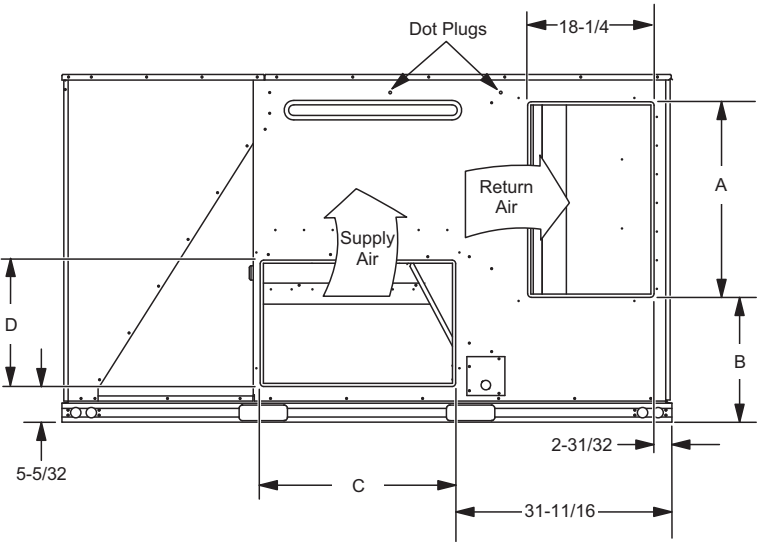


XP150 Unit Side Duct Openings

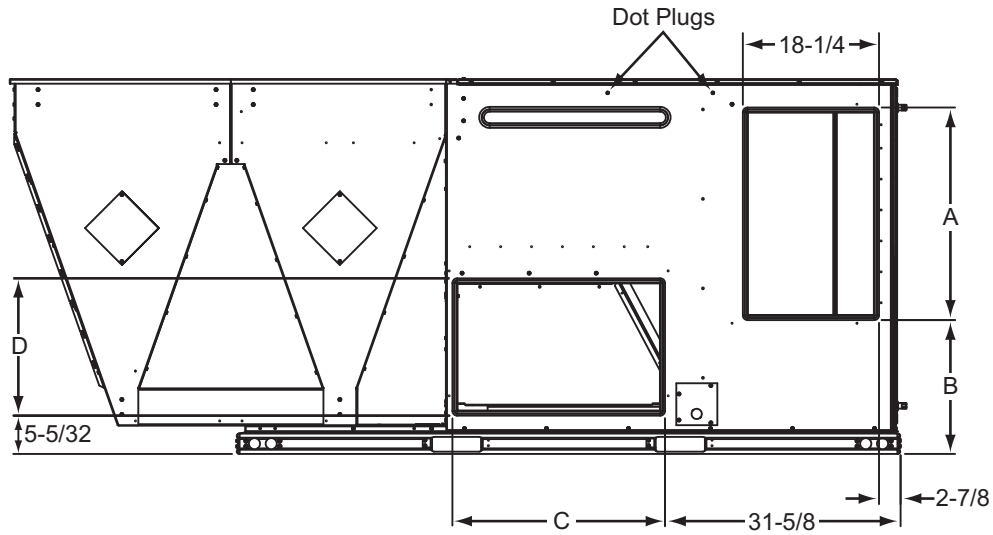

Side Duct Dimensions


Unit Model Number	Dimension (in.)			
	A	B	C	D
078	28 1/4	18 1/16	28 1/4	18 1/4
090	27 3/4	12 1/16	27 1/2	16
102	28 1/4	18 1/16	28 1/4	18 1/4
120	28 1/4	18 1/16	28 1/4	18 1/4
150	28 1/4	18 1/16	28 1/4	18 1/4

XP078-150 Unit Left Duct Opening

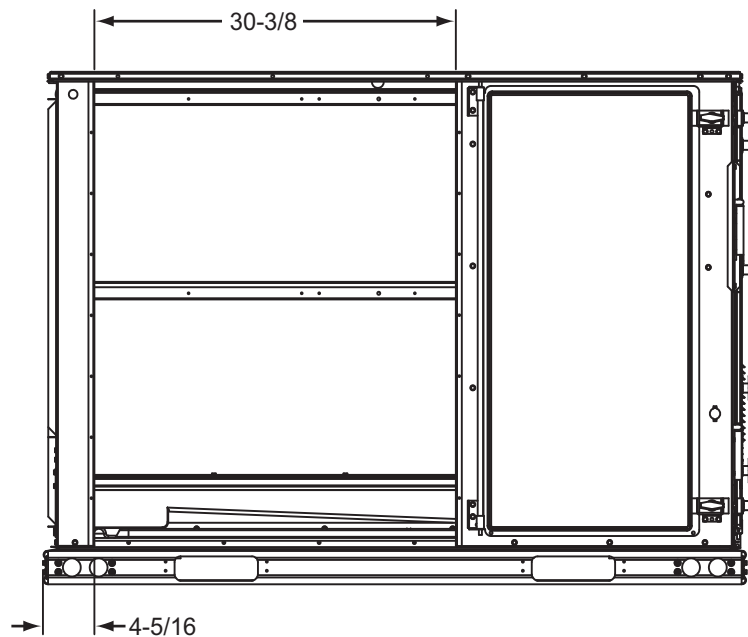



XP078-150 Unit Accessory Dimensions

XP078-150 Roof Curb

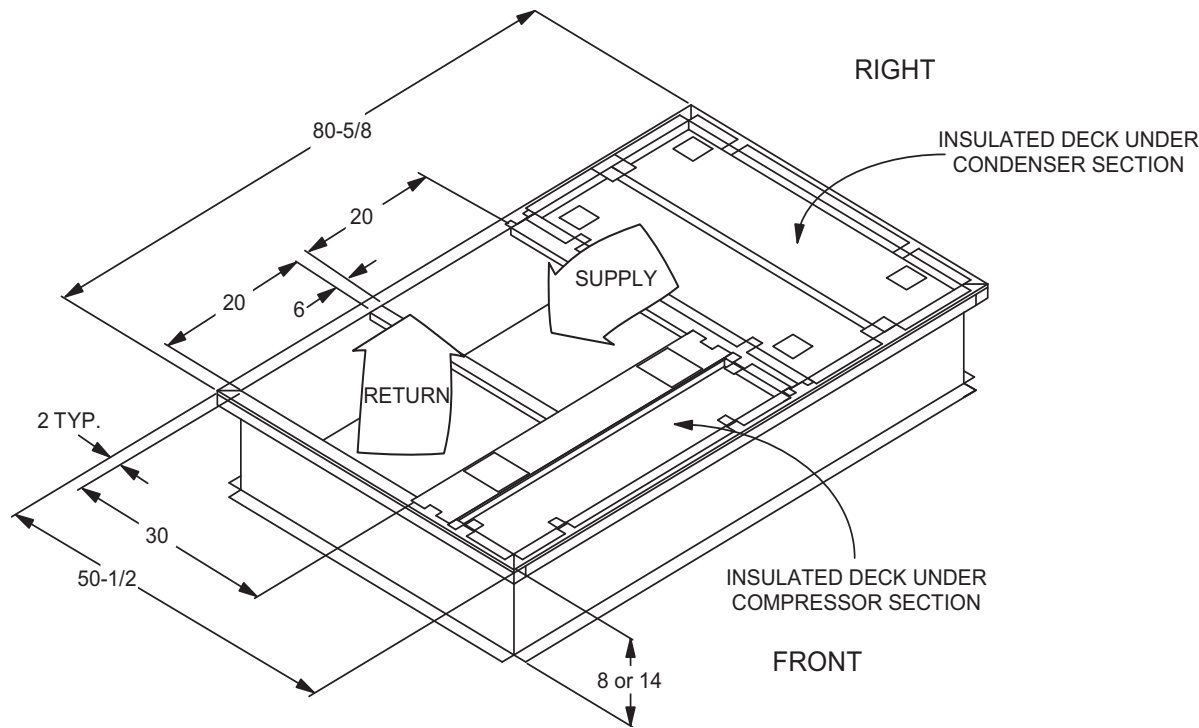

XP078-150 Transition Roof Curb

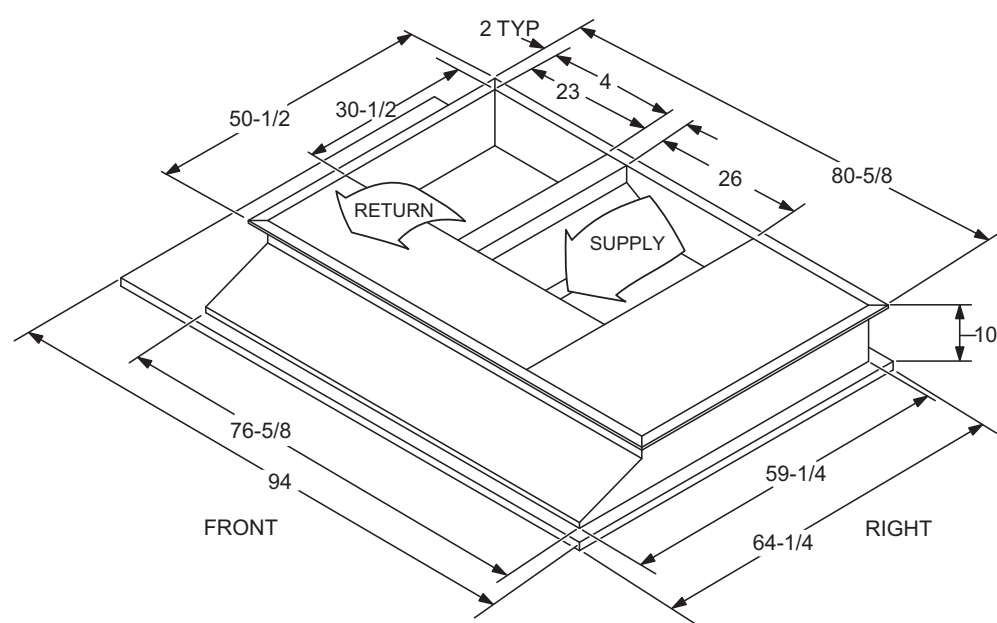

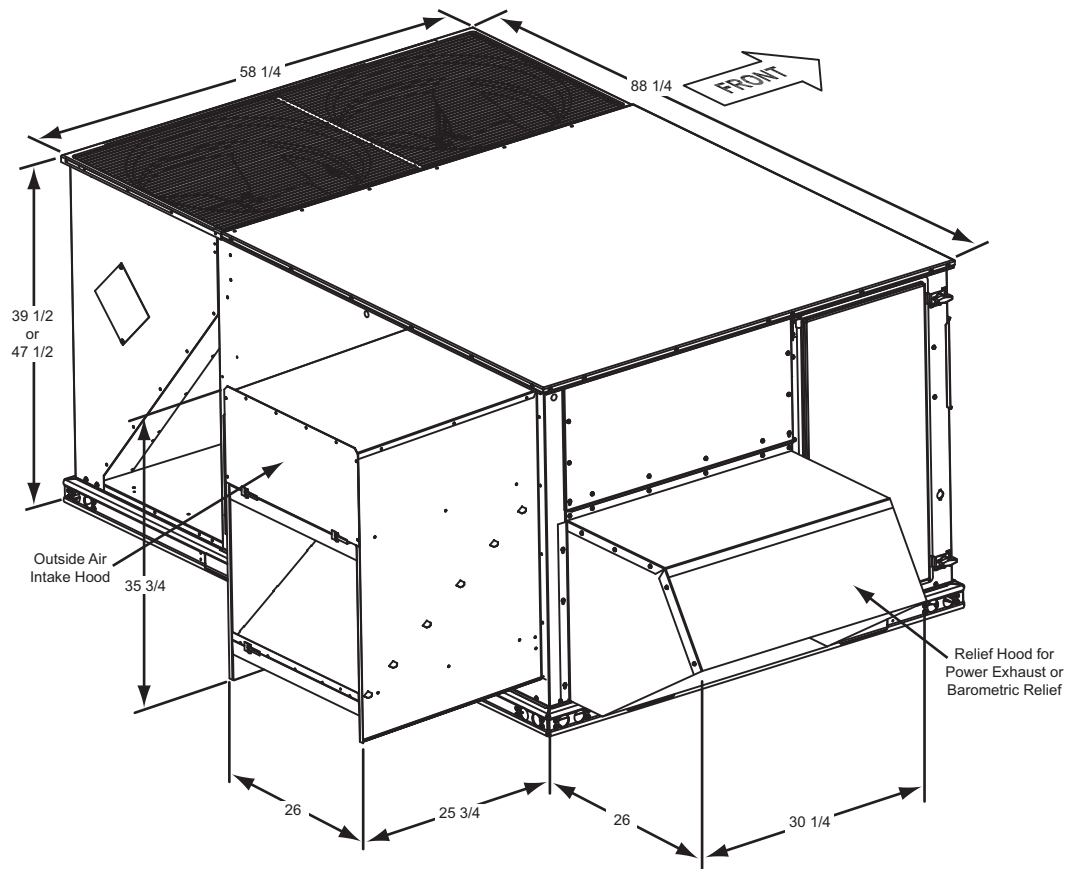XP078-150 Economizer Assembly


Economizer Options

Economizer Usage


Application	Cabinet Height	Description	Model
Bottom Return	All	Downflow economizer with barometric relief	2EE04705924
Side Return	All	Horizontal economizer without barometric relief	2EE04706024 ¹
ERV or End Return	42"	Slab Economizer, 42" tall cabinet	2EE04705824 ²
	50"	Slab Economizer, 50" tall cabinet	2EE04705724 ²

- 1. Barometric relief must be ordered separately and installed in duct work.
- 2. Barometric relief or fresh air hood not included. Must be ordered separately.


Factory Installed Downflow Economizer

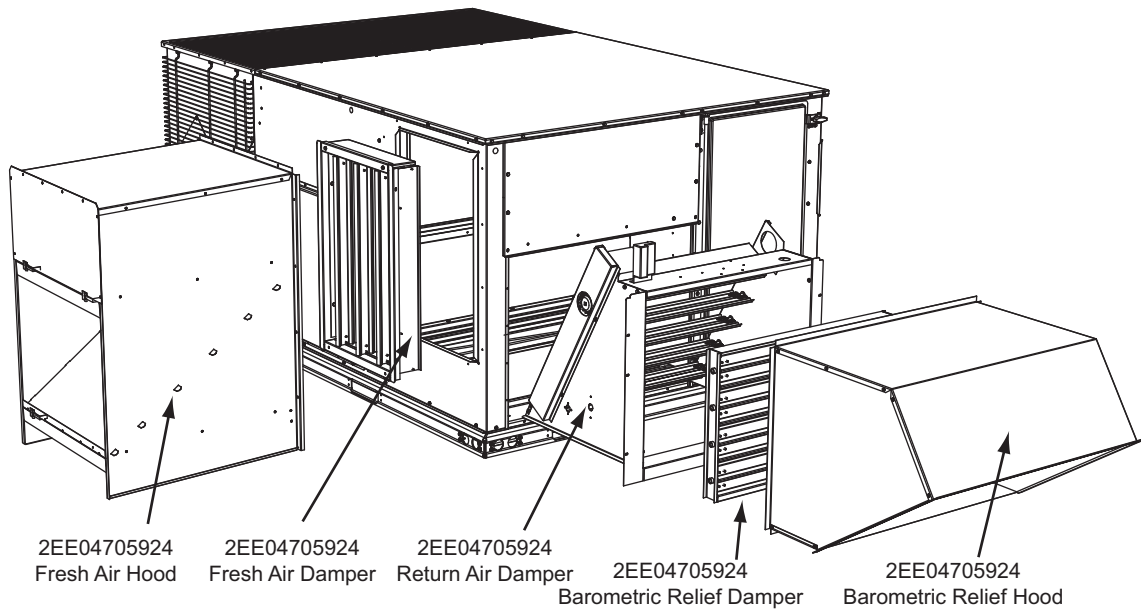


Field Installed Downflow Economizer W/Power Exhaust

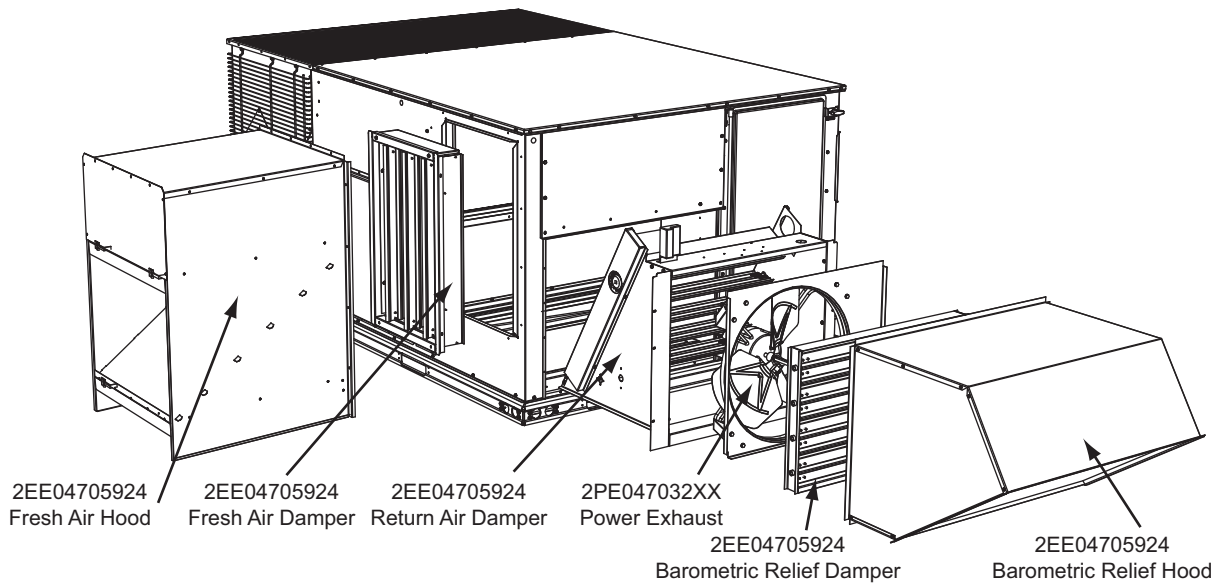


Field Installed Horizontal Economizer W/Power Exhaust

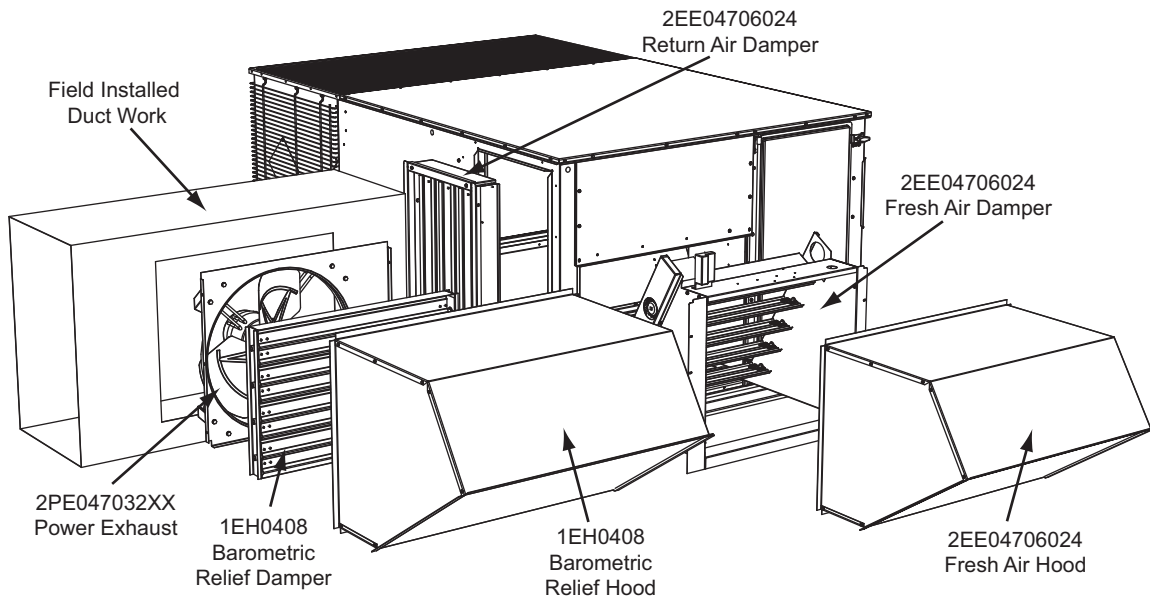

Slab Economizer Downflow W/Power Exhaust

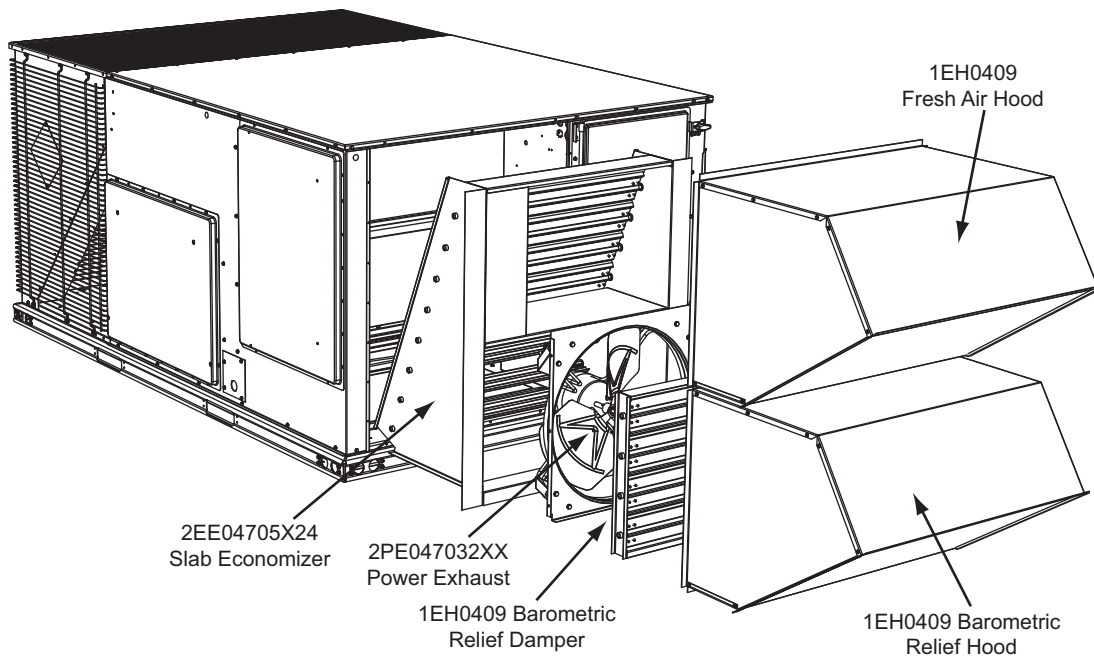

Slab Economizer End Return W/Power Exhaust

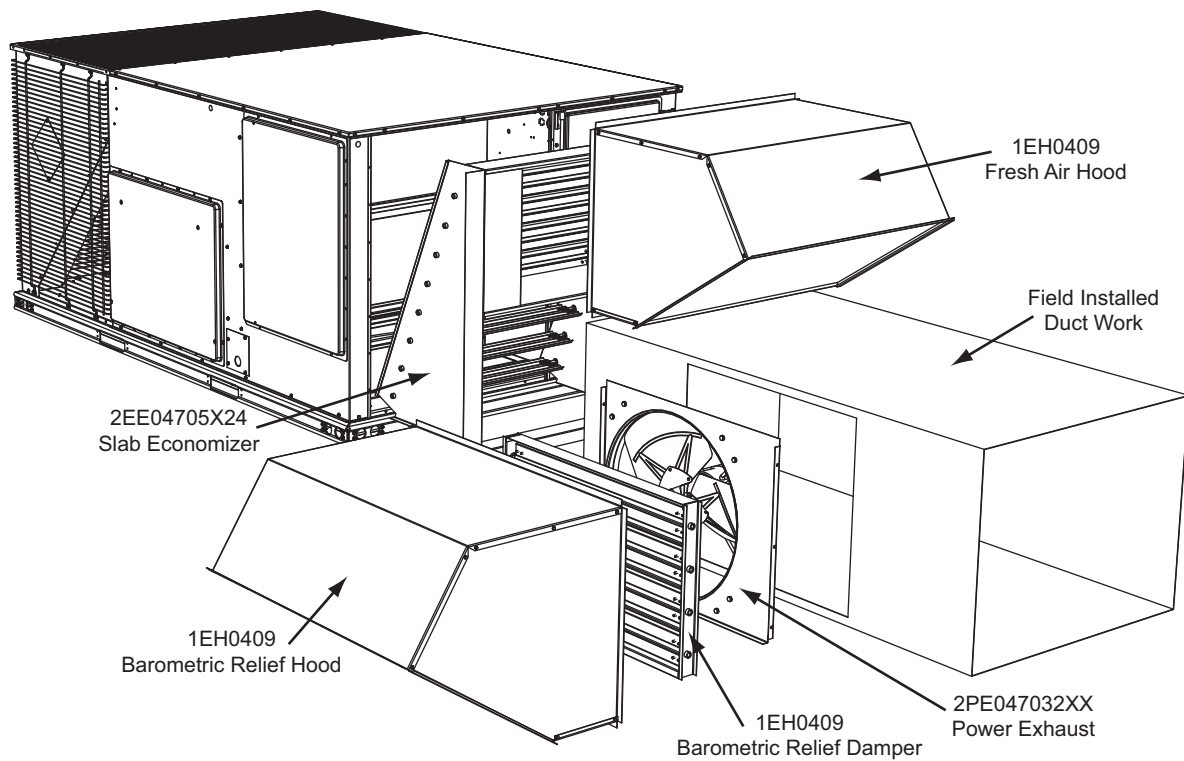

Subject to change without notice. Printed in U.S.A.
Copyright © 2013 by Johnson Controls, Inc. All rights reserved.

528195-YTG-H-0213
Supersedes: 528195-YTG-G-1012

Johnson Controls Unitary Products
5005 York Drive
Norman, OK 73069